C4064 (BK)

14A005

Convertible top lower relay



F05062

Pin	Circuit	Circuit function
30	902 (YE)	Convertible top motor, to, Convertible top lower relay +/–
85	977 (VT/WH)	Brake indicator, control
86	688 (GY/LB)	Convertible top switch, to, Convertible top lower relay –VPWR
87	170 (RD/LB)	Voltage supplied at all times (overload protected)
87A	1205 (BK)	Ground

‡‡ coupe

C4108a (GY)

14A005

‡‡19B113

Subwoofer amplifier, front

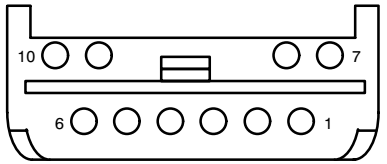

F10009

Pin	Circuit	Circuit function
1	694 (BK/LG)	Ground
2	694 (BK/LG)	Ground
3	694 (BK/LG)	Ground
4	828 (VT/LB)	Voltage supplied at all times (overload protected)
5	828 (VT/LB)	Voltage supplied at all times (overload protected)
6	828 (VT/LB)	Voltage supplied at all times (overload protected)
7	822 (BK/LG)	Subwoofer amplifier, front, to Subwoofer, +
8	287 (BK/WH)	Subwoofer amplifier, front, to Subwoofer, –
9	–	not used
10	–	not used