C270d

14A005

P91
Central Junction Box (CJB)

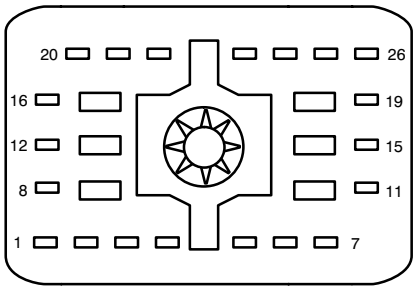

F26017

Pin	Circuit	Circuit Function
1	–	not used
2	29-CF58 (OG/GN)	Voltage supplied at all times (overload protected)
3	29S-DK22 (OG/YE)	Voltage supplied at all times (overload protected), Switched
4	20-AD1 (PK/YE)	Voltage, hot in run only
5	29-AD24 (OG/GN)	Voltage supplied at all times (overload protected)
6	20-HC1 (PK/YE)	Voltage, hot in run only
7	15-DA5 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)
8	20-DK20 (PK/OG)	Voltage, hot in run only
	20-DA1 (PK/YE)	Voltage, hot in run only
9	30-DD2 (RD/BU)	Voltage supplied at all times (not overload protected)
10	30-DD1 (RD/YE)	Voltage supplied at all times (not overload protected)
11	–	not used
12	29-PG6 (OG/YE)	Voltage supplied at all times (overload protected)
13	29-HA6 (OG/YE)	Voltage supplied at all times (overload protected)
14	–	not used
15	29-DA3 (OG)	Voltage supplied at all times (overload protected)
16	–	not used
17	30-DD3 (RD/OG)	Voltage supplied at all times (not overload protected)
18	–	not used
19	–	not used
20	29S-LC36 (OG/YE)	Voltage supplied at all times (overload protected), Switched
21	29S-LB2B (OG/BU)	Voltage supplied at all times (overload protected), Switched
22	29S-LC5 (OG/GN)	Voltage supplied at all times (overload protected), Switched
23	15-RP1 (GN/WH)	Voltage, ignition switch in Start or Run (not overload protected)
	15-RP3 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected)
24	29S-AD2 (OG/BU)	Voltage supplied at all times (overload protected), Switched
25	29S-LH2 (OG/BU)	Voltage supplied at all times (overload protected), Switched
26	29S-LH33 (OG/BK)	Voltage supplied at all times (overload protected), Switched