## C271a

### 14401

M200
Front blower motor
speed controller
(19E624)




F05083

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 184 (T/OG) | Blower motor speed controller, signal |
| 2 | 399 (BN/YE) | Blower motor relay, switched power |
| 3 | – | not used |
| 4 | – | not used |
| 5 | 57 (BK) | Ground |

## C271b

### 18B518

M200
Front blower motor
speed controller
(19E624)




F02020

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 755 (BN/WH) | Electronic Automatic Temperature Control (EATC) module (19980), to, Front blower motor speed controller (19E624) |
| 2 | 757 (RD/WH) | Front blower motor speed controller (19E624), to, Blower motor |

## C274a

### 14A005

A262
Central security
module

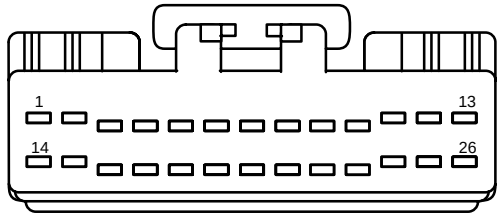


F26015

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 163 (RD/OG) | Door lock actuator, left front, output |
| 2 | – | not used |
| 3 | 70 (LB/WH) | ISO Bus |
| 4 | – | not used |
| 5 | 78 (LB/YE) | Key pad button 1/2, signal |
| 6 | 79 (LG/RD) | Key pad button 3/4, signal |
| 7 | 122 (YE) | Key pad button 7/8, signal |
| 8 | 123 (RD) | Key pad button 9/0, signal |
| 9 | – | not used |
| 10 | 1 (DB) | Horn relay, control |
| 11 | 999 (LB/WH) | GEM/Central security module door ajar |
| 12 | 140 (BK/PK) | Voltage supplied in reverse |
| 13 | – | not used |
| 14 | 57 (BK) | Ground |
| 15 | 124 (BN) | Key pad common |
| 16 | – | not used |
| 17 | – | not used |
| 18 | – | not used |
| 19 | 121 (YE/BK) | Key pad button 5/6, signal |
| 20 | – | not used |
| 21 | – | not used |
| 22 | – | not used |
| 23 | – | not used |
| 24 | – | not used |
| 25 | 640 (RD/YE) | Voltage supplied in Start and Run (overload protected) |
| 26 | 810 (RD/LG) | Brake pedal position switch (13480), input |