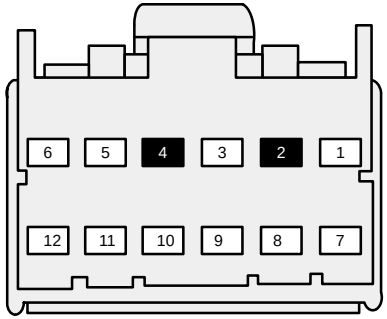

C382

CD CHANGER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	832 (LB/PK)	Audio Corporate Protocol A
2	–	NOT USED
3	694 (BK/LG)	Ground
4	–	NOT USED
5	856 (VT)	Left Channel Signal L+
6	690 (GY)	Right Channel Signal R+
7	833 (TN)	Audio Corporate Protocol B
8	1068 (LG/BK)	ASYS On
9	829 (WH/VT)	Power (Hot at All Times)
10	48	Audio Shield
11	798 (LG/RD)	Left Channel Signal L–
12	799 (OG/BK)	Right Channel Signal R–

AUDIO

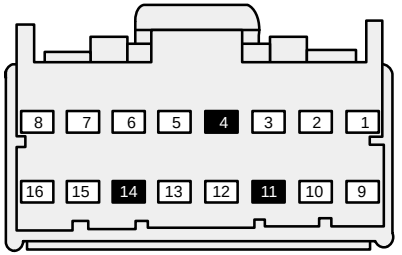

C314 (BLACK)

REAR INTEGRATED CONTROL PANEL (RICP)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	19 (LB/RD)	Illumination
2	57 (BK)	Ground
3	694 (BK/LG)	Ground
4	–	NOT USED
5	802	RR Speaker Signal (–)
6	803 (BN/PK)	RR Speaker Signal (+)
7	800 (GY/LB)	LR Speaker Signal (–)
8	801 (TN/YE)	LR Speaker Signal (+)
9	829 (WH/VT)	Power (Hot at All Times)
10	1068 (LG/BK)	ASYS On
11	–	NOT USED
12	833 (TN)	Audio Corporate Protocol B
13	832 (LB/PK)	Audio Corporate Protocol A
14	–	NOT USED
15	827 (TN/WH)	LR Speaker Amplifier (+)
16	825 (TN/LG)	RR Speaker Amplifier (+)