C264

18B864



F16087

(1) 167 (BN/OG)
(2) 168 (RD/BK)
(3) 57 (BK)
(4) 804 (OG/LG)
(5) 819 (LG/WH)
(6) 820 (DB/YE)
(7) 57 (BK)
(8) 813 (LB/WH)
(9) 815 (LG/OG)
(10) 816 (LG/VT)
(11) 57 (BK)
(12) 805 (WH/LG)
(13) 173 (DG/VT)
(14) –
(15) –
(16) 811 (DG/OG)

14401



F16034

(1) 167 (BN/OG)
(2) 168 (RD/BK)
(3) 57 (BK)
(4) 804 (OG/LG)
(5) 819 (LG/WH)
(6) 820 (DB/YE)
(7) 57 (BK)
(8) 813 (LB/WH)
(9) 815 (LG/OG)
(10) 816 (LG/VT)
(11) 57 (BK)
(12) 805 (WH/LG)
(13) 173 (DG/VT)
(14) –
(15) –
(16) 811 (DG/OG)

C274a (GY)

14401

Central security module

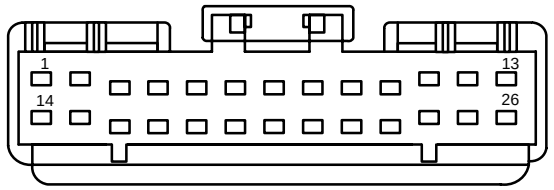

F26014

Pin	Circuit	Circuit function
1	163 (RD/OG)	Driver door unlock relay, switched power
2	–	not used
3	70 (LB/WH)	ISO Bus
4	–	not used
5	78 (LB/YE)	Key pad common
6	79 (LG/RD)	Key pad common
7	–	not used
8	–	not used
9	–	not used
10	6 (YE/LG)	Horn relay, control
11	999 (LB/WH)	GEM/Central security module door ajar, signal
12	140 (BK/PK)	Voltage supplied in reverse
13	–	not used
14	57 (BK)	Ground
15	124 (BN)	Key pad common
16	–	not used
17	–	not used
18	–	not used
19	121 (YE/BK)	Key pad common
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	–	not used
25	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
26	810 (RD/LG)	Brake pedal position switch (13480), input