## C3008e

### 14A488

A262
Central security
module

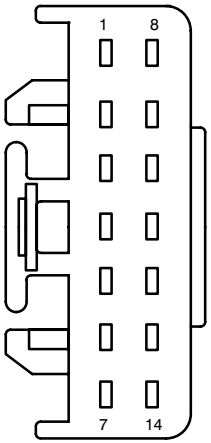


F14023

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 456 (DG/OG) | Voltage supplied at all times (overload protected) |
| 2 | 14 (BN) | Power, Exterior lamps |
| 3 | 645 (WH/LB) | Voltage supplied at all times (overload protected) |
| 4 | 218 (WH/VT) | Autolamp relay, control |
| 5 | 1399 (DB/WH) | Autolamp On/Off signal |
| 6 | 460 (YE/LB) | Horn relay, control |
| 7 | 221 (OG/WH) | Autolamp relay, switched output |
| 8 | 195 (TN/WH) | Voltage supplied at all times (overload protected) |
| 9 | 23 (TN/LG) | Anti–theft, switch sense |
| 10 | – | not used |
| 11 | – | not used |
| 12 | – | not used |
| 13 | – | not used |
| 14 | 196 (DB/OG) | Voltage supplied at all times (overload protected) |

## C3008f

### 14A488

A262
Central security
module

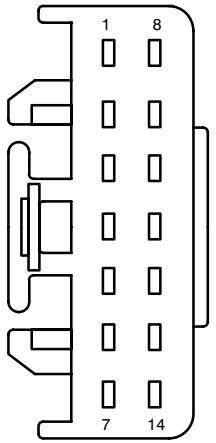


F14023

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | – | not used |
| 2 | 78 (LB/YE) | Key pad A |
| 3 | 123 (RD) | Key pad C |
| 4 | 124 (BN) | Key pad common |
| 5 | 693 (OG) | UBP Diagnostics |
| 6 | 66 (LB) | Key pad illumination |
| 7 | 84 (VT/YE) | Liftgate glass actuator, output |
| 8 | – | not used |
| 9 | 122 (YE) | Key pad B |
| 10 | – | not used |
| 11 | 1092 (PK/OG) | Liftgate glass release switch to Central security module |
| 12 | – | not used |
| 13 | – | not used |
| 14 | – | not used |