C270f (GN)

14401

Central Junction
Box (CJB) (14A068)

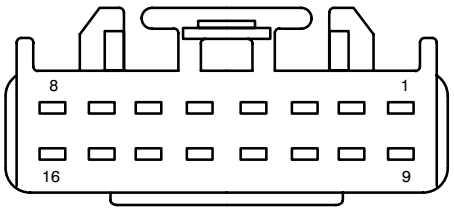

F16029

Pin	Circuit	Circuit function
1	–	not used
2	298 (VT/OG)	Voltage supplied in Start and Run (overload protected)
3	–	not used
4	–	not used
5	–	not used
6	1003 (GY/YE)	Voltage supplied in Start (overload protected)
7	–	not used
8	1001 (WH/YE)	Voltage supplied at all times (overload protected)
9	1002 (BK/PK)	Accessory relay, switched power, output
10	298 (VT/OG)	Voltage supplied in Start and Run (overload protected)
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used

C270g (GY)

14401

Central Junction
Box (CJB) (14A068)



F06341

Pin	Circuit	Circuit function
1	40 (LB/WH)	Voltage supplied at all times (overload protected)
2	16 (RD/LG)	Voltage, ignition switch in Start or Run (not overload protected), to, Central Junction Box (CJB) (14A068)
3	75 (DG/LG)	Voltage: Ignition switch in Accessory or Run to, Central Junction Box (CJB) (14A068)
4	160 (DB/WH)	Voltage, ignition switch in Start or Run (not overload protected), to, Central Junction Box (CJB) (14A068)
5	–	not used
6	1001 (WH/YE)	Voltage supplied at all times (overload protected)