## C250 (BK)

**14401**

Ignition switch
(11572)

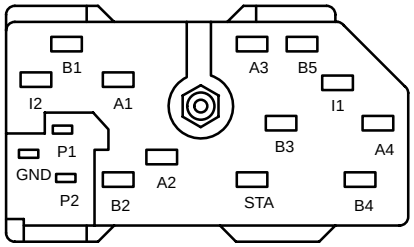


F15014

| Pin | Circuit | Circuit function |
|---|---|---|
| A1 | 297 (BK/LG) | Voltage in Run or Accessory (overload protected) |
| A2 | 687 (GY/YE) | Voltage in Run (overload protected) |
| A3 | 1040 (RD/BK) | Voltage in Run (overload protected) |
| A4 | 687 (GY/YE) | Voltage in Run (overload protected) |
| B1 | 37 (YE) | Voltage supplied at all times (overload protected) |
| B2 | 37 (YE) | Voltage supplied at all times (overload protected) |
| B3 | 37 (YE) | Voltage supplied at all times (overload protected) |
| B4 | 1050 (LG/VT) | Voltage supplied at all times (overload protected) |
| B5 | 1050 (LG/VT) | Voltage supplied at all times (overload protected) |
| GND | – | not used |
| I1 | 16 (RD/LG) | Voltage supplied in Start and Run (overload protected) |
| I2 | – | not used |
| P1 | – | not used |
| P2 | – | not used |
| STA | 33 (WH/PK) | Voltage supplied in Start (overload protected) |

## C251 (BK)

**14401**

Data Link Connector
(DLC) (14489)

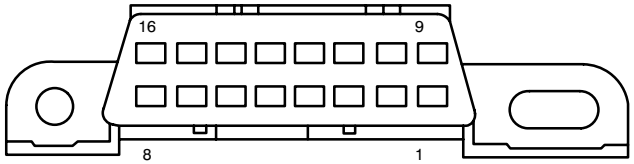


F16121

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | – | not used |
| 2 | 914 (TN/OG) | SCP Bus, + |
| 3 | – | not used |
| 4 | 1205 (BK) | Ground |
| 5 | 651 (BK/YE) | Ground |
| 6 | – | not used |
| 7 | 70 (LB/WH) | ISO Bus |
| 8 | – | not used |
| 9 | – | not used |
| 10 | 915 (PK/LB) | SCP Bus, – |
| 11 | – | not used |
| 12 | – | not used |
| 13 | 107 (VT) | Module programming signal |
| 14 | – | not used |
| 15 | – | not used |
| 16 | 1047 (LG/RD) | Voltage supplied at all times (overload protected) |