C270h (GY)

* Early production
** Late production

14401

Central Junction
Box (CJB) (14A068)



F12137

Pin	Circuit	Circuit function
1	15 (RD/YE)	switched power, output to Low beam, Headlamp, Fuses
2	275 (YE)	Headlamp dimmer switch, High Beam/Flash–to–Pass, output
3	–	not used
4	*1049 (BN/PK)	Voltage supplied at all times (overload protected)
	**131 (VT/OG)	Voltage supplied at all times (overload protected)
5	188 (WH/BK)	Fog lamp switch, output to Fog lamp relay
6	40 (LB/WH)	Voltage supplied at all times (overload protected)
7	–	not used
8	797 (LG/VT)	Voltage supplied at all times (overload protected)
9	566 (DG)	Voltage supplied at all times (overload protected)
10	196 (DB/OG)	Voltage supplied at all times (overload protected)
11	32 (RD/LB)	Voltage supplied in Start (overload protected)
12	297 (BK/LG)	Voltage in Run or Accessory (overload protected)

C270j (BK)

* Early production
** Late production

14A005

Central Junction
Box (CJB) (14A068)

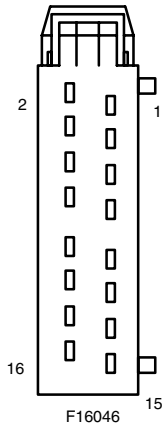

F16046

Pin	Circuit	Circuit function
1	59 (DG/VT)	Fused rear window defrost relay, output
2	294 (WH/LB)	Voltage supplied in Start and Run (overload protected)
3	–	not used
4	194 (PK)	Accessory delay relay, output
5	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
6	1003 (GY/YE)	Voltage supplied in Start and Run (overload protected)
7	956 (OG/LG)	Voltage supplied at all times (overload protected)
8	9 (LG/OG)	Turn lamps, feed, left rear
9	*1789 (VT/WH)	switched power, Voltage supplied in reverse
	**140 (BK/PK)	Voltage supplied in reverse
10	729 (RD/WH)	Voltage supplied at all times (overload protected)
11	720 (RD/YE)	Voltage supplied at all times (overload protected)
12	–	not used
13	609 (OG/YE)	Voltage supplied in Start and Run (overload protected)
14	5 (OG/LB)	Turn lamps, feed, right rear
15	705 (LG/OG)	Battery saver relay, output
16	64 (DG)	Trailer, Turn lamps, feed, Right