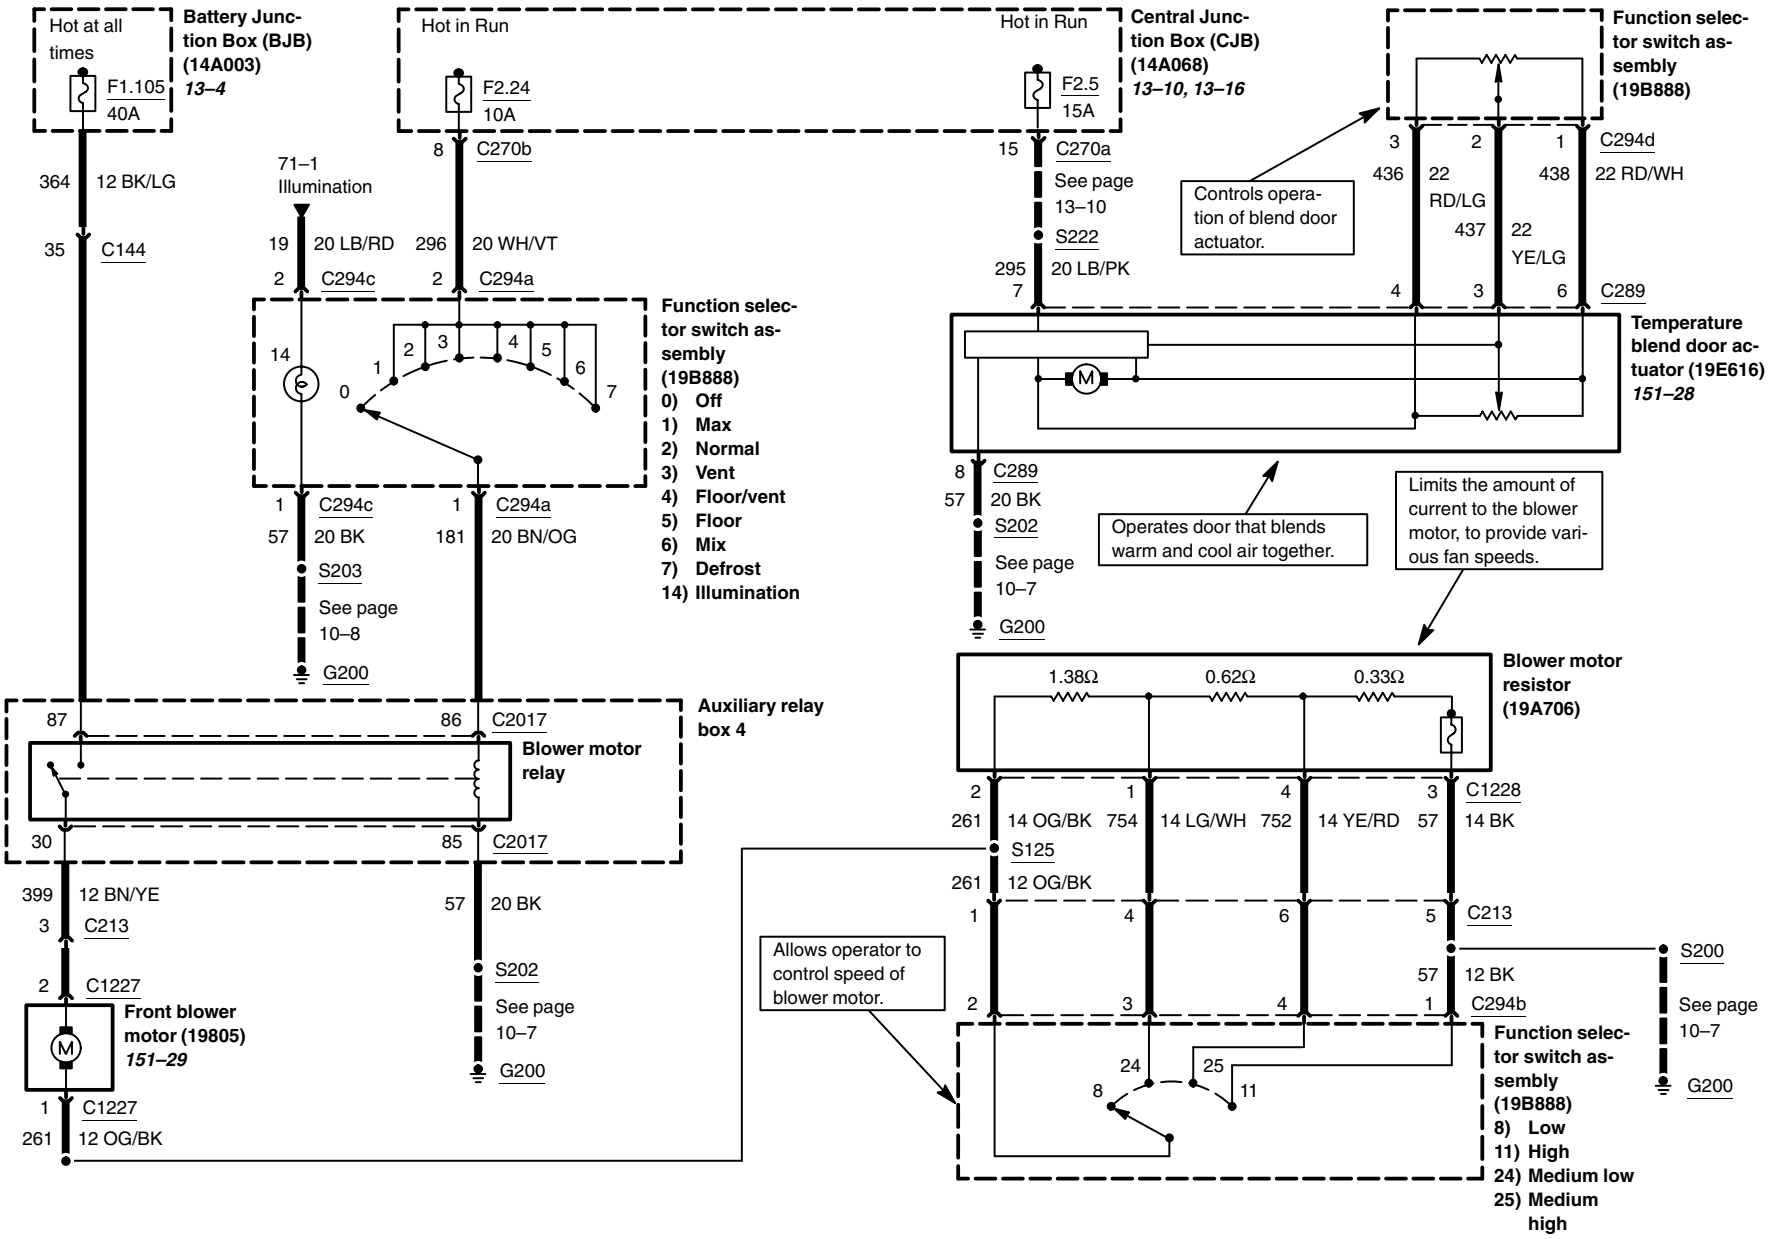
Hot at all times
F1.105
40A
Battery Junction Box (BJB) (14A003) 13–4
364 12 BK/LG
35 C144
Hot in Run
F2.24
10A
8 C270b
Hot in Run
F2.5
15A
Central Junction Box (CJB) (14A068) 13–10, 13–16
15 C270a
See page 13–10
S222
295 20 LB/PK
7
71–1 Illumination
19 20 LB/RD
2 C294c
296 20 WH/VT
2 C294a
Function selector switch assembly (19B888)
0) Off
1) Max
2) Normal
3) Vent
4) Floor/vent
5) Floor
6) Mix
7) Defrost
14) Illumination
14
1 C294c
57 20 BK
S203
See page 10–8
G200
1 C294a
181 20 BN/OG
Auxiliary relay box 4
87
86 C2017
Blower motor relay
30
85 C2017
399 12 BN/YE
3 C213
2 C1227
Front blower motor (19805) 151–29
1 C1227
261 12 OG/BK
57 20 BK
S202
See page 10–7
G200
Controls operation of blend door actuator.
Function selector switch assembly (19B888)
3 436 22 RD/LG
2 437 22 YE/LG
1 438 22 RD/WH
C294d
4 3 6 C289
Temperature blend door actuator (19E616) 151–28
8 C289
57 20 BK
S202
See page 10–7
G200
Operates door that blends warm and cool air together.
Limits the amount of current to the blower motor, to provide various fan speeds.
Blower motor resistor (19A706)
1.38Ω
0.62Ω
0.33Ω
2 261 14 OG/BK
1 754 14 LG/WH
4 752 14 YE/RD
3 57 14 BK
C1228
S125
261 12 OG/BK
1 4 6 5 C213
Allows operator to control speed of blower motor.
2 3 4
57 12 BK
1 C294b
S200
See page 10–7
G200
Function selector switch assembly (19B888)
8) Low
11) High
24) Medium low
25) Medium high
24
25
8
11