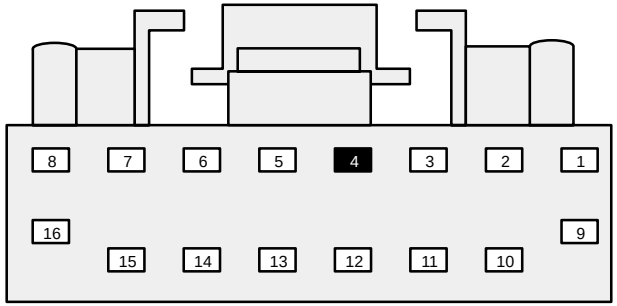

C256

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	235 (RD/BK)	Lamp Return Pulse Width Dimmer	10	137 (YE/BK)	Radio and Antenna Switch Feed
2	57 (BK)	Ground Circuit	11	694 (BK/LG)	Radio/Amplifier/Compact Disc Player/ Changer Amplifier Power Return
3	1000 (RD/BK)	Fused Ignition “Start” to Module, GEM Input	12	800 (GY/LB)	Amplifier/Speaker Switch Feed to Left Rear Speaker
4	–	NOT USED			
5	802 (OG/RD)	Amplifier/Speaker Switch Feed to Right Rear Speaker	13	801 (TN/YE)	Amplifier/Speaker Switch Feed to Left Rear Speaker
6	803 (BN/VT)	Amplifier/Speaker Switch Feed to Right Rear Speaker	14	804 (OG/LG)	Speaker Voice Coil Feed–Front (Left Channel)
7	805 (WH/LG)	Speaker Voice Coil Feed–Front (Right Change)	15	813 (LB/WH)	Speaker Switch Ground to Left Front Speaker
8	811 (DG/OG)	Speaker Switch Ground to Right Front Speaker	16	694 (BK/LG)	Radio/Amplifier/Compact Disc Player/ Changer Amplifier Power Return
9	797 (LG/VT)	Battery Feed to Stereo			