C289

14401

Blend door actuator



F16071

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	773 (DG/OG)	Blend door actuator, wiper
4	660 (YE/LG)	Blend door actuator –
5	–	not used
6	359 (GY/RD)	Blend door actuator +
7	1003 (GY/YE)	Voltage in Run (overload protected)
8	57 (BK)	Ground

C290a (BK)

14401

Audio unit (18808)

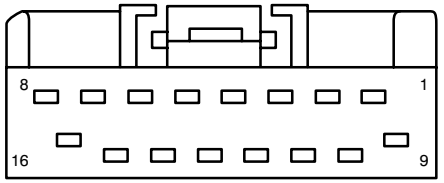

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument Panel Illumination, Lamp, feed – Illumination +
2	57 (BK)	Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	audio ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	audio ground