C2188a (BK)

14401

Radio (18806)



F07011

Pin	Circuit	Circuit function
1	797 (LG/VT)	Voltage supplied at all times (overload protected)
2	57 (BK)	Ground, Illumination
3	1499 (PK/LG)	Accessory delay relay, output
4	19 (LB/RD)	Illumination, Power
	235 (RD/BK)	Instrument illumination, feed
5	–	not used
6	694 (BK/LG)	Ground, audio
7	–	not used

C2188b (BK)

14401

Radio (18806)

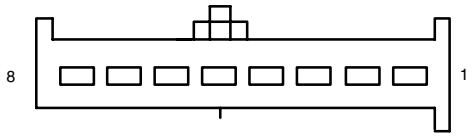

F08044

Pin	Circuit	Circuit function
1	804 (OG/LG)	Speaker, left front (18808) +
2	813 (LB/WH)	Speaker, left front (18808) –
3	800 (GY/LB)	Speaker, left rear (18808) +
4	801 (TN/YE)	Speaker, left rear (18808) –
5	805 (WH/LG)	Speaker, right front (18808) +
6	811 (DG/OG)	Speaker, right front (18808) –
7	802 (OG/RD)	Speaker, right rear (18808) +
8	803 (BN/PK)	Speaker, right rear (18808) –