C270a

14401

Central Junction
Box (CJB) (14A068)

* all others
** CDX6

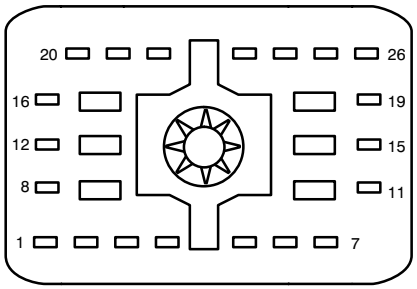

F26017

Pin	Circuit	Circuit function
1	29-ED6 (OG/YE)	Voltage supplied at all times (overload protected)
2	20-DD7 (PK/YE)	Voltage in Run (overload protected)
3	50-DD5 (GY/BK)	Voltage supplied in Start (overload protected)
4	*29-MD15 (OG/BK)	Voltage supplied at all times (overload protected)
	**29-MD1 (OG/YE)	Voltage supplied at all times (overload protected)
5	–	Voltage in Run (overload protected)
6	–	Voltage supplied in Start and Run (overload protected)
7	50-MD15 (GY/OG)	Voltage supplied in Start (overload protected)
8	29-FA10 (OG/GN)	Voltage supplied at all times (overload protected)
9	15-DD4 (GN/BK)	Voltage supplied in Start and Run (overload protected)
10	–	not used
11	–	not used
12	29-GG11 (OG/BU)	Voltage supplied at all times (overload protected)
13	15-JA14 (GN/BK)	Voltage supplied in Start and Run (overload protected)

Pin	Circuit	Circuit function
14	20-DD6 (PK/WH)	Voltage in Run (overload protected)
15	75-DD1 (YE)	Voltage in Run or Accessory (overload protected)
16	29-GL6 (OG)	Voltage supplied at all times (overload protected)
17	–	not used
18	75-MD15 (YE/GN)	Voltage in Run or Accessory (overload protected)
19	20-FA10 (PK/OG)	Voltage in Run (overload protected)
20	29S-LC1 (OG/YE)	fused feed, Switched System Power (SSP) 3
21	–	Voltage in Run (overload protected)
22	29-AL12 (OG)	Voltage supplied at all times (overload protected)
23	15-GG14 (GN/RD)	Voltage supplied in Start and Run (overload protected)
24	29S-GL36 (OG/BU)	fused feed, Switched System Power (SSP) 1
25	75-GG15 (YE/GN)	Voltage in Run or Accessory (overload protected)
26	75-DA1 (YE)	Voltage in Run or Accessory (overload protected)