C309a

14A005
14A488

A256
Remote Anti–theft
Personality (RAP)
module

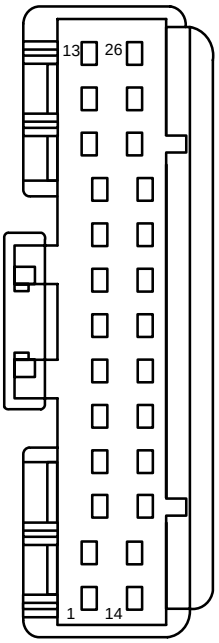

F26014

Pin	Circuit	Circuit Function
1	129 (LG)	Driver door unlock relay, output
2	–	not used
3	70 (LB/WH)	ISO Bus
4	–	not used
5	78 (LB/YE)	Key pad button 1/2, output
6	79 (LG/RD)	Key pad button 3/4, output
7	122 (YE)	Key pad button 7/8, output
8	123 (RD)	Key pad button 9/0, output
9	–	not used
10	–	not used
11	999 (LB/WH)	GEM/RAP door ajar, signal
12	140 (BK/PK)	Voltage supplied in reverse
13	–	not used
14	–	not used
15	124 (BN)	Key pad common
16	–	not used
17	–	not used
18	–	not used
19	121 (YE/BK)	Key pad button 5/6, output
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	1090 (TN/LB)	Remote keyless entry, jumper
25	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
26	810 (RD/LG)	Brake pedal position switch, input

C309b

14A005
14A488

A256
Remote Anti–theft
Personality (RAP)
module

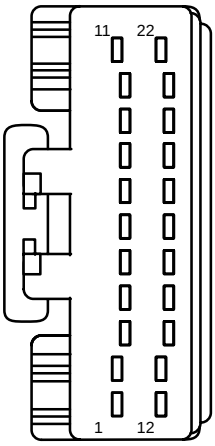

F22017

Pin	Circuit	Circuit Function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	–	not used
6	–	not used
7	–	not used
8	218 (WH/VT)	Park lamp relay, control
9	–	not used
10	1013 (BN/LG)	GEM/RAP illumination, signal
11	120 (PK/LG)	Door unlock relay, control
12	171 (BK/WH)	Voltage supplied at all times (overload protected)
13	1090 (TN/LB)	Remote keyless entry, jumper
14	570 (BK/WH)	Ground
15	66 (LB)	Key pad illumination
16	–	not used
17	–	not used
18	–	not used
19	–	not used
20	6 (YE/LG)	Horn relay, switched power, output
21	–	not used
22	119 (PK/YE)	Door lock relay, control