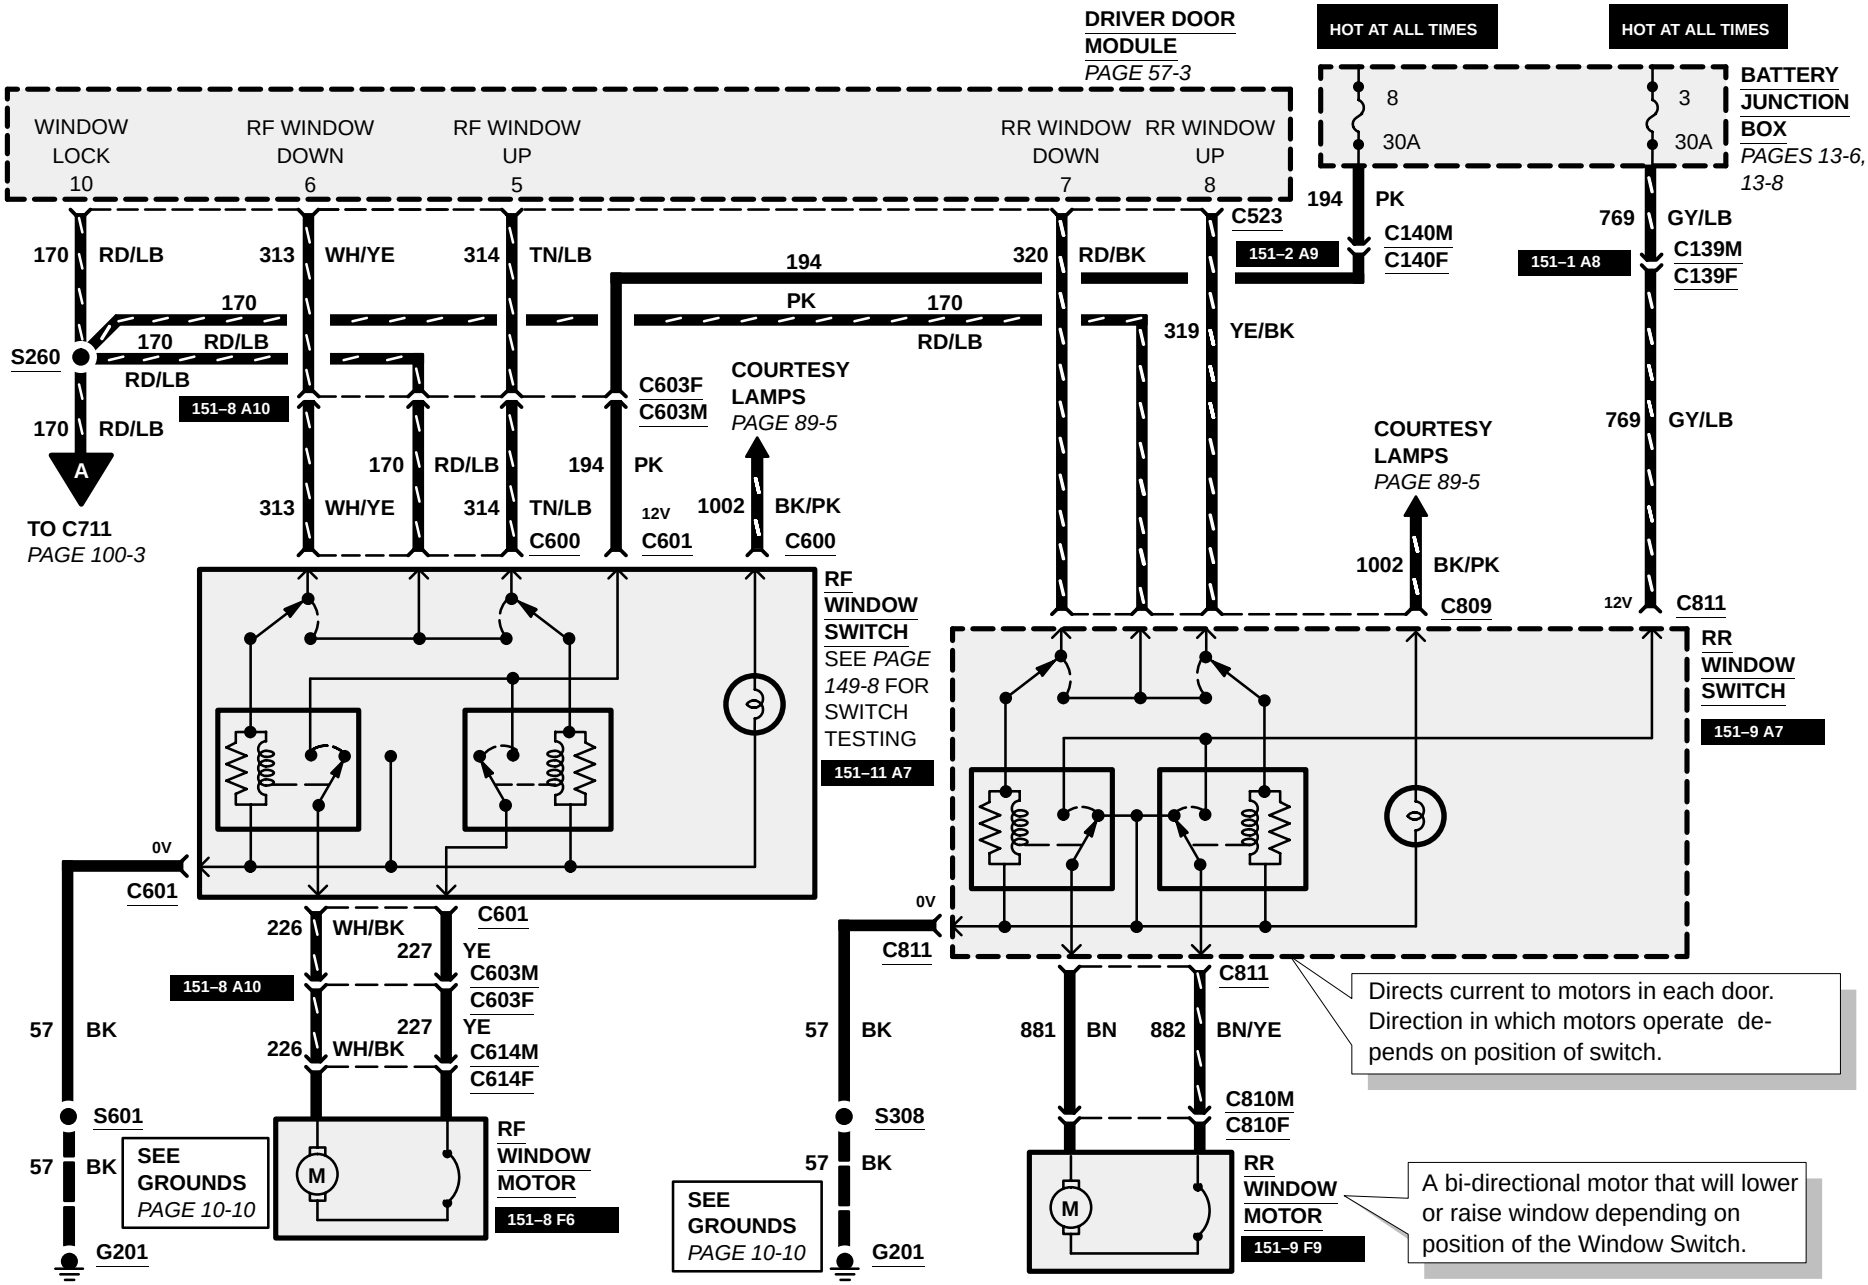
DRIVER DOOR MODULE
PAGE 57-3
HOT AT ALL TIMES
HOT AT ALL TIMES
BATTERY JUNCTION BOX
PAGES 13-6, 13-8
8
30A
3
30A
WINDOW LOCK 10
RF WINDOW DOWN 6
RF WINDOW UP 5
RR WINDOW DOWN 7
RR WINDOW UP 8
194 PK
C140M
C140F
C523
151–2 A9
769 GY/LB
C139M
C139F
151–1 A8
170 RD/LB
313 WH/YE
314 TN/LB
194 PK
320 RD/BK
319 YE/BK
S260
151–8 A10
C603F
C603M
COURTESY LAMPS
PAGE 89-5
A
TO C711
PAGE 100-3
313 WH/YE
314 TN/LB
C600
12V
C601
1002 BK/PK
C600
COURTESY LAMPS
PAGE 89-5
1002 BK/PK
C809
769 GY/LB
12V
C811
RF WINDOW SWITCH
SEE PAGE 149-8 FOR SWITCH TESTING
151–11 A7
RR WINDOW SWITCH
151–9 A7
0V
C601
226 WH/BK
227 YE
C603M
C603F
151–8 A10
227 YE
226 WH/BK
C614M
C614F
57 BK
S601
SEE GROUNDS
PAGE 10-10
G201
RF WINDOW MOTOR
151–8 F6
0V
C811
C811
881 BN
882 BN/YE
C810M
C810F
57 BK
S308
SEE GROUNDS
PAGE 10-10
G201
RR WINDOW MOTOR
151–9 F9
Directs current to motors in each door. Direction in which motors operate depends on position of switch.
A bi-directional motor that will lower or raise window depending on position of the Window Switch.