



webexone²⁵

Cisco UCM, On-Premises and Dedicated Instance. From on-premises to the cloud and all things in-between.

Justin Jordan, Senior Product Manager

James Arias, Senior Product Manager

Sunny Akkera, Senior Product Manager

CLS-2267

September 29, 2025

webexone²⁵

Join the conversation!

Scan the QR code to be added to
the Webex space for Q&A and
more



Introduction

Cisco Calling

30M+

Cisco UCM

50M+

Cisco Cloud
(Cisco and partner hosted)

18M+


Webex Calling

Market leadership

Customer choice and flexibility

Commitment to ongoing investment

What is the *WAY*
Forward?

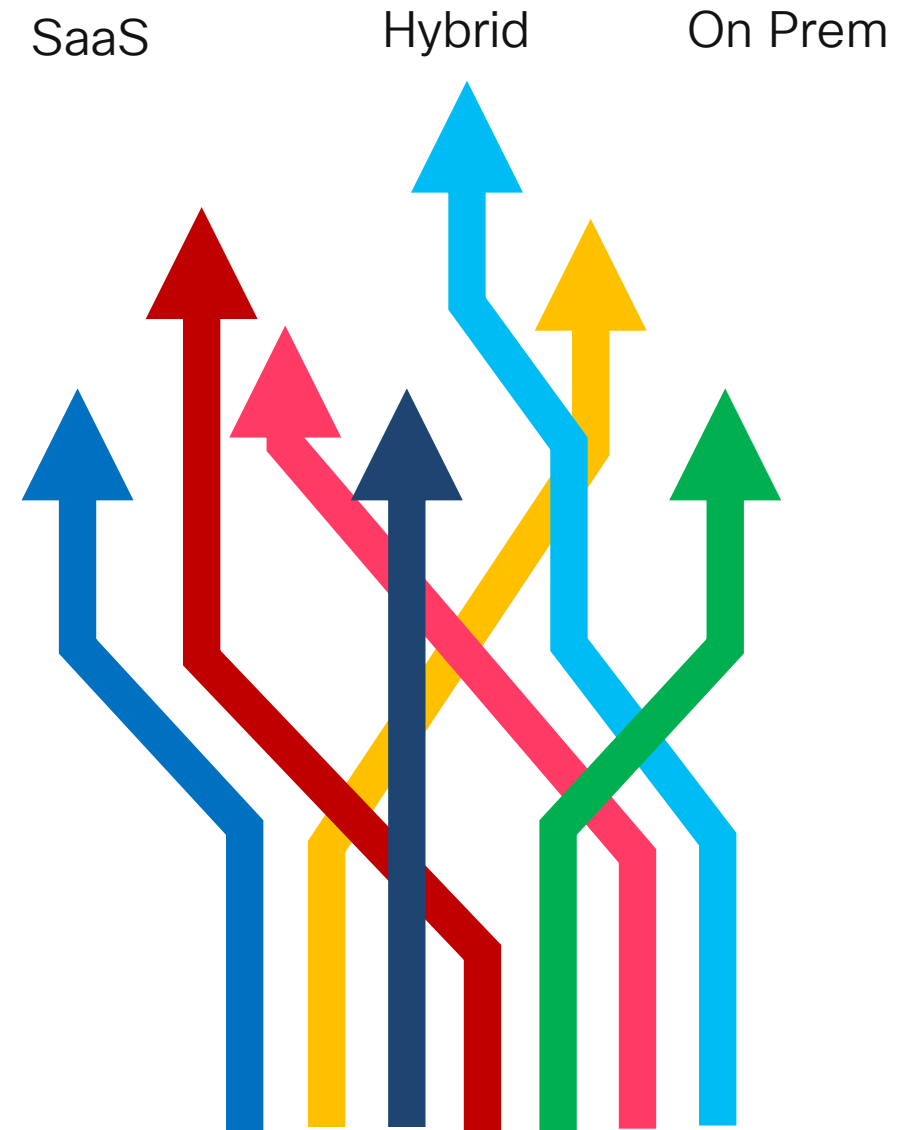

Delivering on Distance Zero...

AI-Powered Webex
Suite

Devices + Apps

Global Presence

Manageability Super-Power

Meet customers where they are

CISCO CALLING

Any deployment. Any time.



On-Premises

Ongoing investment
Federal Certifications
Hypervisor flexibility
Enhanced Jabber experience



Hybrid

PSTN trunking
Cloud Connected-UC
Sovereign controls
Local compliance




Cloud


Dedicated Instance
Multi-tenant
On-Premise Survivability
99.999% Calling SLA

UCM empowers all deployment models


Air Gapped

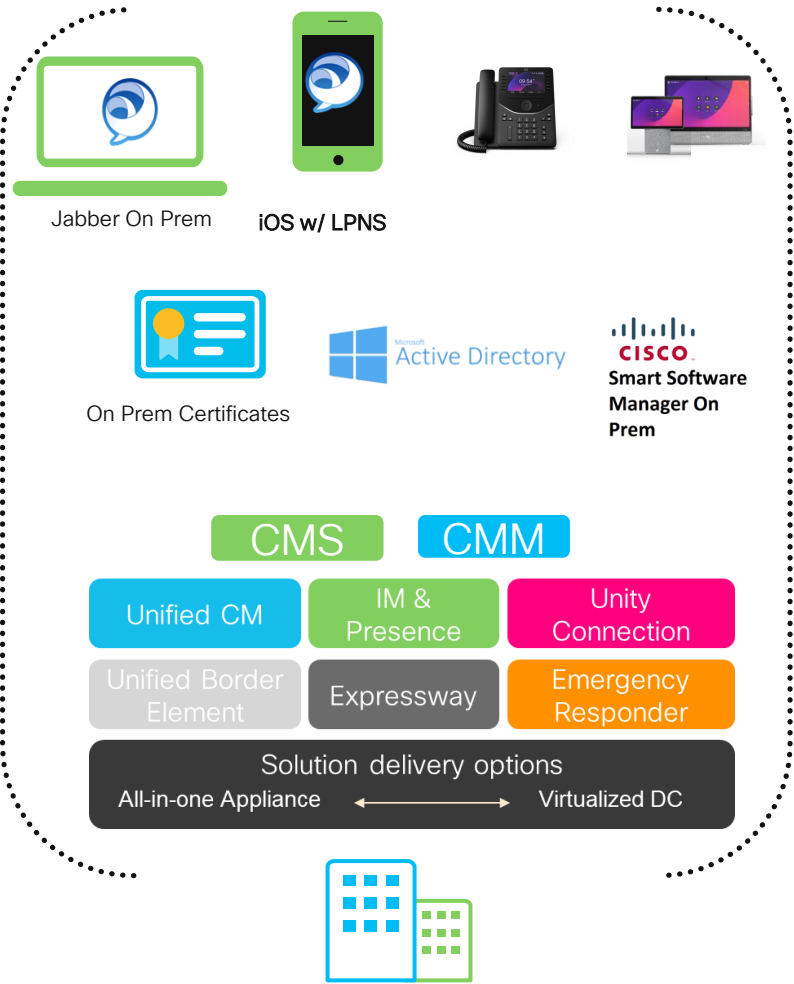

Hybrid (Cloud Enabled)

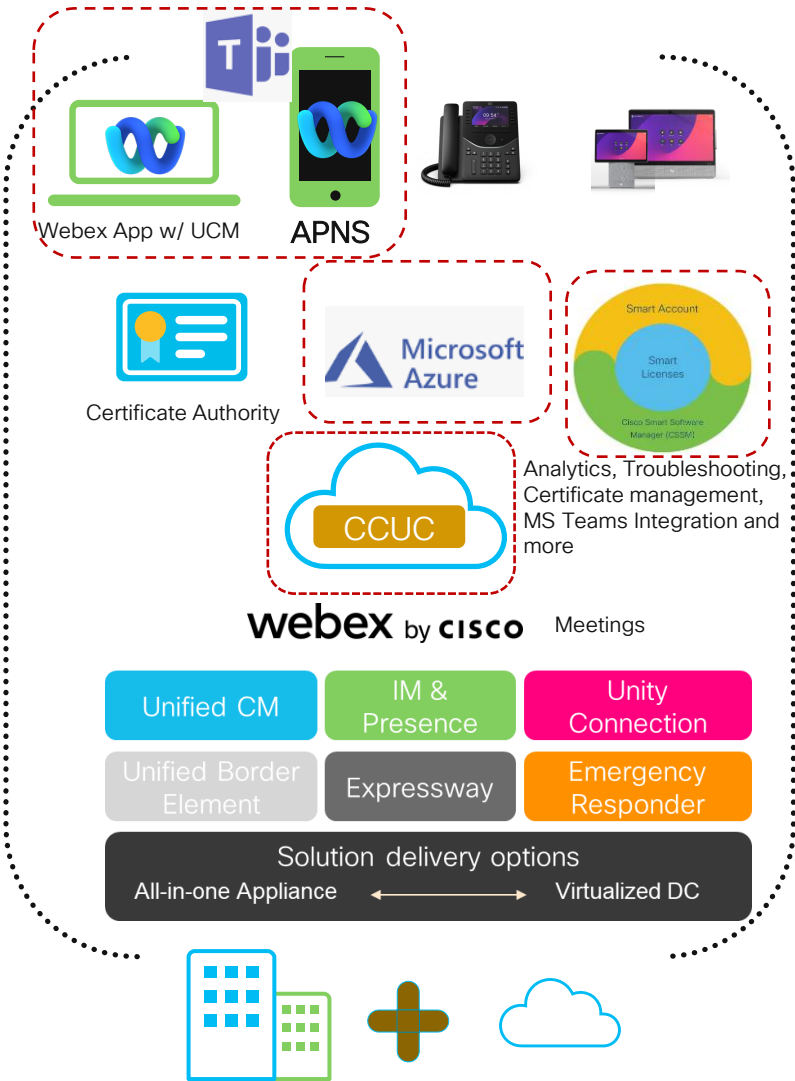

Webex Cloud

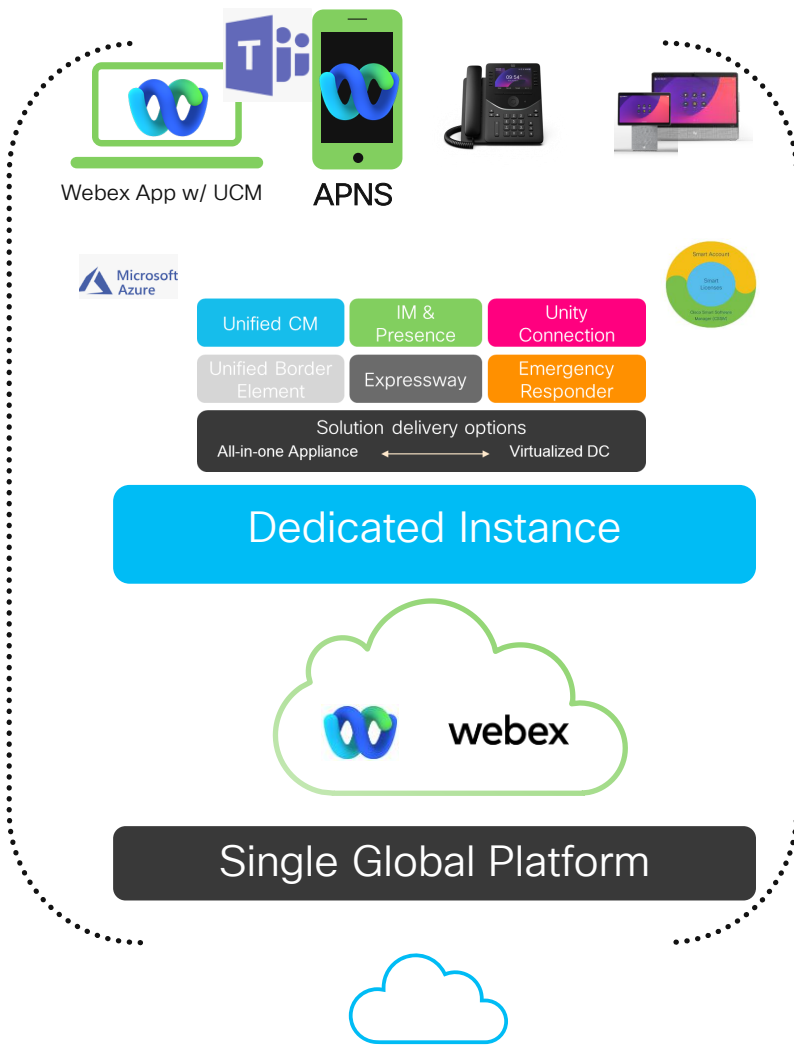

Empowering Long Term On-Premises and Air Gapped strategy

Cisco On-Premises Suite Strategy and Differentiation

On Premises and Air Gapped will exist and Growing need: Long term Cisco vision for On-Premises and Completely Air Gapped portfolio

Continuous Platform investment for long term roadmap ensuring business continuity, customer flexibility and simplicity

Quality and Security are paramount: Maintain the highest product quality, best in class security, certifications and compliance

Drive modern Seamless experience, Bring AI Innovation On Premises: Cisco plans to enhance Jabber, CMS, and UCM for Air Gapped w/ AI, and Webex App, CCUC for higher value with Cloud and deliver device innovation

Dedicated Resources: We have allocated dedicated resources, including budget, personnel, and technology, to continuously improve the product.

Flexible Webex Calling solution, with option of Webex Calling and Dedicated Instance based off UCM technology for seamless cloud transition.

Cisco UCM Release Strategy

End-of-life milestones by version


- Products that this timing applies to:
- UCM - Unified Communications Manager
 - SME - Session Management Edition
 - IM&P - Instant Messaging & Presence service
 - CUC - Unity Connection
 - CER - Cisco® Emergency Responder
 - PCD - Prime Collaboration Deployment
 - Elements of Webex Calling Dedicated Instances, UCMC-G, Webex Contact Center Enterprise

UCM 11.5

UCM 12.5

UCM 14

UCM 15
These dates are subject to change.

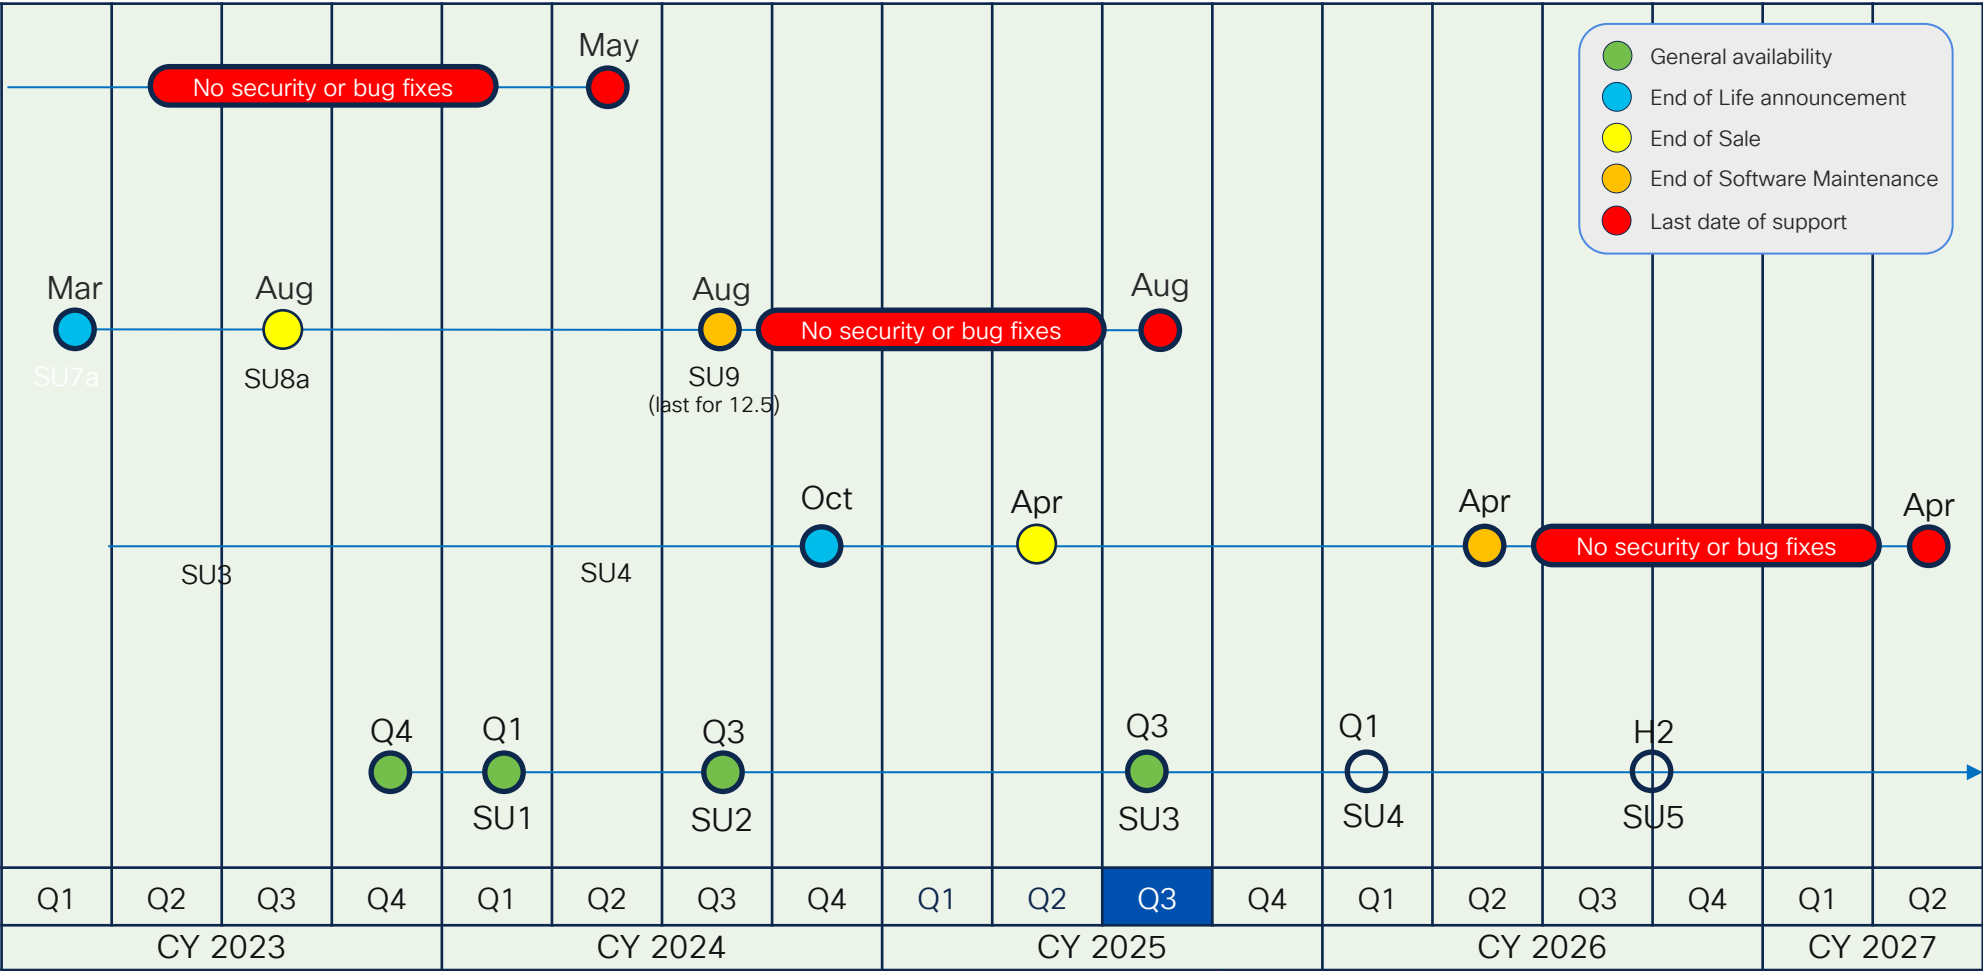

↑
You are here

Continued investment in CUCM for long term supportability

Unified Communications Manager Development Themes



Simplifying UC
administration



Enhancing security
and compliance



Delivering the best
user experiences



Connections to
Cloud

125+

Portfolio enhancements
since v14

400K+

Hours of development

300+

Security updates

CUCM 15

Available
Now

User Experience

- Improved Webex App experience with persistent CUCM login flow
- *Local Push Notification (14SU3)*
- CUC – Better noise cancellation for VM deposit via Babble Labs integration

Admin Simplicity & Platform Updates

- Core Linux Transition
 - Python 3
 - IDS
 - Kernel crypto
 - FIPS Toolkit
 - 64-bit Support
- Support for VG410
- CER – New device support for Switch Port tracking

Security & Compliance

- Certificate based Multi Factor Authentication for RTMT
- FIP 140-2 Certification
- USGv6 R1 Certification
- DOD-IN APL Certification

Bridges to the Cloud

- *Microsoft Teams Integration (via CCUC) – Call History, Voicemail, Bi-directional Presence, Call Forwarding Status and more*

Low new Feature
Content

Focus on Quality

Accelerate
migration to CUCM
15

UCM 15 SU3a - UCM, CUC, CER, BE6K/7K

Available
Now

15 SU3a (Jul/Aug CY2025)

Admin Simplicity



- CUC : Smart Licensing transport updates
- UCM: Support 130 lines for KEM (9800 series)
- UCM: SME Busy Out for Easier Upgrades
- UCM: IPv6 for HW GW based Conf Bridge
- UCM: SNR User Control Conf Transfer
- Integrated 9800 Series Device Pack
- New Appliances - BExK M7 & CE1400V

Client and User Experience



- CUBE: Contact Center AI, Agent Answer Support (Q1FY26)
- Webex App - 1080P video
- Webex App - Auto answer Video call on mobile
- Accessibility Improvements

Security and Compliance



- Certifications: CC & CSfC readiness
- CCUC FedRAMP - Phase 1 - MS Teams integration, Azure AD Directory Service (Q1FY26)
- CUC: TLS 1.3 for Client Tools
- Security Improvements

Cloud Enablement



- MS Teams Integration
- Webex Cloud-Connected UC

15SU3a

- Continued SU2 focus themes
- Easier migrations
- Appliance hardware refresh

Action to take

- Upgrade to 15 SU3a, not SU3!
- US Federal Customers & global with higher security profile.

UCM 15 SU4 - UCM, CUC, CER, BE6K/7K

Roadmap
Subject to
change

15 SU4 (pre-FCS, target Q3FY26)

Admin Simplicity



- Alternate Hypervisor Support (NFVIS-for-UC, Nutanix)
- Appliance preload w/ NFVIS (~2HCY26)
- CER: M2 Migration Support
- CUC / IM&P: EWS to Graph API Migration
- UCM: NSE fax/modem pass thru support
- Cisco Contact Center SIP Proxy (Q2FY26)
- CUBE, SRST NextGen C8375-E-G2 Crestone platform support (Q2FY26)

Client and User Experience



- Accessibility Improvements

Security and Compliance



- Jabber SDK support with Oauth 1.0 SSO in redirect URI
- Federal Certifications
- Security Improvements

Cloud Enablement



- MS Teams Integration
- Webex Cloud-Connected UC

15SU4 (pre-FCS)

- New Hypervisors!
- Easier Migrations.

Action to take

- Upgrade to SU4 if need ESXi alternatives.

Let the Celebration Begin.....



Refresher on Upgrade to CUCM 15 SU4

Why migrate to 15 ?

1. Mature (SU3a), the most secure, with long-term support.

2. Fixes CentOS EOL.

- V12.5 went end of TAC support Aug 31, 2005.
- V14 goes end of bug/security fix in April CY26.
- No extended maintenance (rising dependency problems with old database, runtimes, security modules, etc. ... just like 11.5 back during Covid).

3. Fixes VMware by Broadcom.

- Exiting? 15 SU4 required for ESXi alternatives.
- Staying? 15 SU4 required for ESXi 9.0. 12.5 can't upgrade to 8.0+.

4. Eventually required for hardware refresh.

Installed Base Hardware Refresh/Addon BE6K/BE7K & CE1400V Appliances

Roadmap

Subject to
Change

Business Edition
6000 / 7000
Appliance
Models



ESXi

BE6000M M6/M5
BE6000H M5
(M4/older eoSupport)



BE6000 (M7)
BE6K-M7-K9



*NFVIS or
ESXi*



ESXi

BE7000M M6/M5
BE7000H M6/M5
(M4/older eoSupport)



BE7000M (M7)
BE7M-M7-K9



*NFVIS or
ESXi*



*NFVIS or
ESXi*

BE7000H (M7)
BE7H-M7-K9



bare-metal

CE1300 (M6)
CE1200 (M5)
(CE1100/500 eoSupport)



CE1400V (M7)
CE1400V-M7-K9



*NFVIS or
ESXi*

Expressway
CE1x00
Appliance
Models

Getting Started - Basic Discovery Checklist for Migration Prep

Product Support Entitlements

- Collaboration FLEX Subscription (Webex Suite or Calling)?
 - SWSS on perpetual license? Smart accounts created?
-

On Prem Applications

- Review apps, for compatibility, API, dependencies planning
 - Identify 3rd party, homegrown integration applications
 - Review other Cisco products (SDWAN, Meraki, IOS UC etc.)
-

Scope of Upgrade

- Is there more than version upgrade?
 - Ex: re-address apps, change capacity, change VM specs, re-platform, ESXi upgrade, site/DC move
-

VMware ESXi Version

- UCM 15 supported only on ESXi 7.0 U1+ or 8.0 U1+
 - Identify commercial offer – Ex: BE6K/7K Embedded Virtualization offers are past Last Day of Support.
-

Hardware

- BE6K/7K Appliance ? General purpose UCS/Hyperflex? 3rdparty?
 - Which CPU, How much RAM/Disk GB
-

End Points / Devices


- IP Phone Models ? Jabber/Webex App versions ? Meetings devices ?

Hardware Capacity Planning

Example #1 – Medium Collaboration on BE7K


Medium-sized customer (5K devices).
Single-site.
Redundant BE7000M appliances (recent M6 refresh)
ESXi 7.0 and CSR 12.7 app versions .. EOL!

From www.cisco.com/go/quotecollab

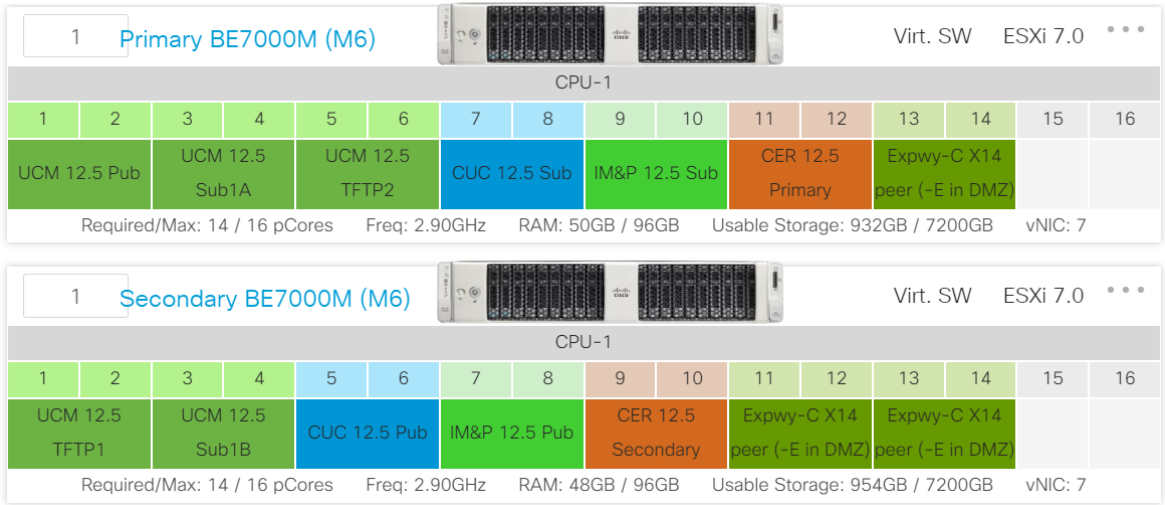

	Capacity per BE7M-M6-K9	Per Appliance	Per application Virtual Machine					Total Needed To Upgrade
		ESXi 7.0>8.0	CUCM 14>15	CUC 14>15	IMP 14>15	CER 14>15	Expressway -C / -E X14.3 >X15	
CPU (pcores)	16C (2.9 GHz)	-	-	-	-	-	-	14C > 14C .. fits!
RAM (GB)	96 GB	+8 GB	+4 GB	+6 GB	+6 GB	+2 GB	-	~50 GB > 84 GB ... fits!
Usable Storage (GB)	4x ~1000 GB	-	-	-	-	-	-	~954 GB > no change ... fits!
Other Notable	-	-	-	-	-	-	-	Upgrade ASAP!

Upgrade Options

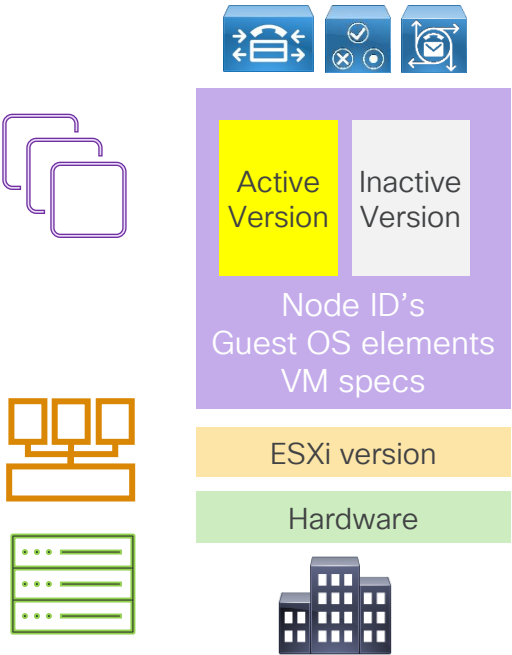

Use Direct Upgrade if..


Upgrading UCM/CUC/IMP and...

NOTHING else.

Use Direct Migration if..

Upgrading UCM/CUC/IMP and...

- Changing IP Addresses / Hostnames.
- Must rebuild to freshen Guest OS partitions / filesystem type.
- Must rebuild to freshen VM specs e.g. vdisk layout.
- Upgrading / replacing ESXi.
- Refreshing Hardware.
- Moving to a new Site.

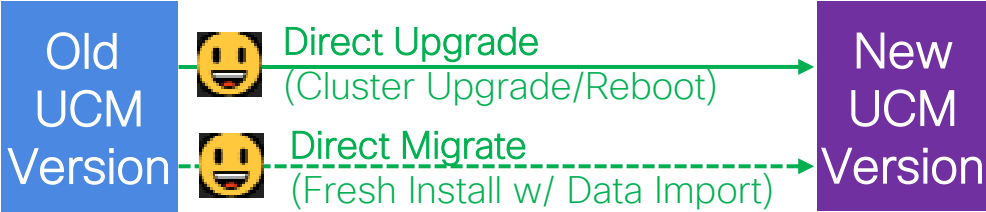

In these versions...	Admin / Devops Experience			Duration	Service Impact	Admin Touch
Source 12.5+ Dest 12.5+	App-native	No API, GUI/CLI only	Cluster	Fastest	Low	Low
Source 10.5+ Dest 12.5su5+	App-native	API or GUI/CLI	Cluster or per-Node	Faster	Low	Medium

Run Pre/Post Upgrade COP Files ! What are they checking?

UCM+IMP: https://www.cisco.com/web/software/286319173/139477/Pre_Upgrade_COP_00049_Readme.pdf

CUC: https://www.cisco.com/web/software/286319537/139787/Pre_Upgrade_COP_CUC_ReadME_008.pdf

CER: https://www.cisco.com/web/software/282074227/136276/Pre_Upgrade_COP_CER_ReadME_06.pdf

Cluster Status & Database Sanity (non-standard entries?, node authN state, replication state)

Common Security Password length (if FIPS, ESM, CC mode)

Compatible Virtual Network Adapter type?

Network status (intra-cluster connectivity, DNS/NTP reachability, NTP stratum clock drift)

License status

Using deprecated features? (IMP Remote Call Control with Microsoft Lync Server Feature, UCM H.323 Gatekeeper Control)

VM Tools type (VMware or Open)

Store Installed COPs, Services Status, Service+Enterprise Parameters, Trunk Status, (un)Registered Phone+CTI Endpoint counts.

Date of last backup

Check free disk space for direct upgrade or direct migration

Check vram

Check guest OS for stale vdisk layout, partitioning, filesystem type

Deprecated phones?

Do what the Upgrade Readiness COP files say!

Expect to iterate:

- Run, get output file. Fix any **CRIT**, **FAIL**. **WARN** might need fix or be ok.
- Re-run until all checks are **PASS** or explainable **WARN**.
- After upgrade, run post-upgrade-COP (different file) for before/after comparison of certain items.

FAIL on **legacy vdisk layouts**, **guest OS partitions**, **swap** or certain **ext3** means you *must* either:

- Direct Migrate to 15
- Backup/Restore all nodes, then you can Direct Upgrade to 12.5
- No shortcuts/hacks!

Platform Strategy

New Hypervisor plans – Tackle VMware disruption

Legend



Application / Workload
Software



Hypervisor
Software



Hardware

Reminder: these ESXi licenses are End of Support

Collaboration pricelist Commercial Offers of OEM ESXi	Cisco EOL Bulletin # with Last Day of Support from Cisco/VMware
BE6K/7K-VIRTENH-7X <i>Cisco BE Embedded Virt Enhanced</i>	EOL13629 End of support March 31, 2025
BE6K/7K-VIRTBASP-7X <i>Cisco BE Embedded Virt Basic Plus</i>	
BE6K-VIRTBAS-7X <i>Cisco BE6K Embedded Virt Basic</i>	
VMW-VS6-CVSTD-K9 <i>Cisco Collab Virt Standard</i>	EOL13450 End of support LDoS November 30, 2023
VMW-VS6-FND-K9 <i>Cisco UC Virt Foundation</i>	
VMW-VS6-HYPPLS-K9 <i>Cisco UC Virt Hypervisor Plus</i>	
R-VMW-UC-FND5-K9	EOL11590 End of support LDoS September 30, 2020
VMW-VS5-HYP	

Key points:

- End of Support = no TAC, no GLO, no upgrades.
- All Cisco>VMware lifelines gone (resell, license, support).
- Nothing Cisco can sell or renew for ESXi.

What should customers do?

1. Migrate Personas who can to Webex.
2. Upgrade to v15, preferably 15 SU3a or SU4.
3. Arrange interim ESXi coverage with Broadcom partner.
 - Consolidate / right-size ESXi footprint.
 - Mitigation plan ESXi deprecation of BIOS boot.
 - Mitigation plan ESXi deprecation of Skylake CPU.
4. Audit incumbent apps and compute/storage hardware.


Offers on datacenter pricelist no longer viable as replacement

VMW-VSP-STD-*A=
VMW-VSP-EPL-*A=


Recap: New Onprem Hypervisor Strategy

Roadmap


Subject to
Change

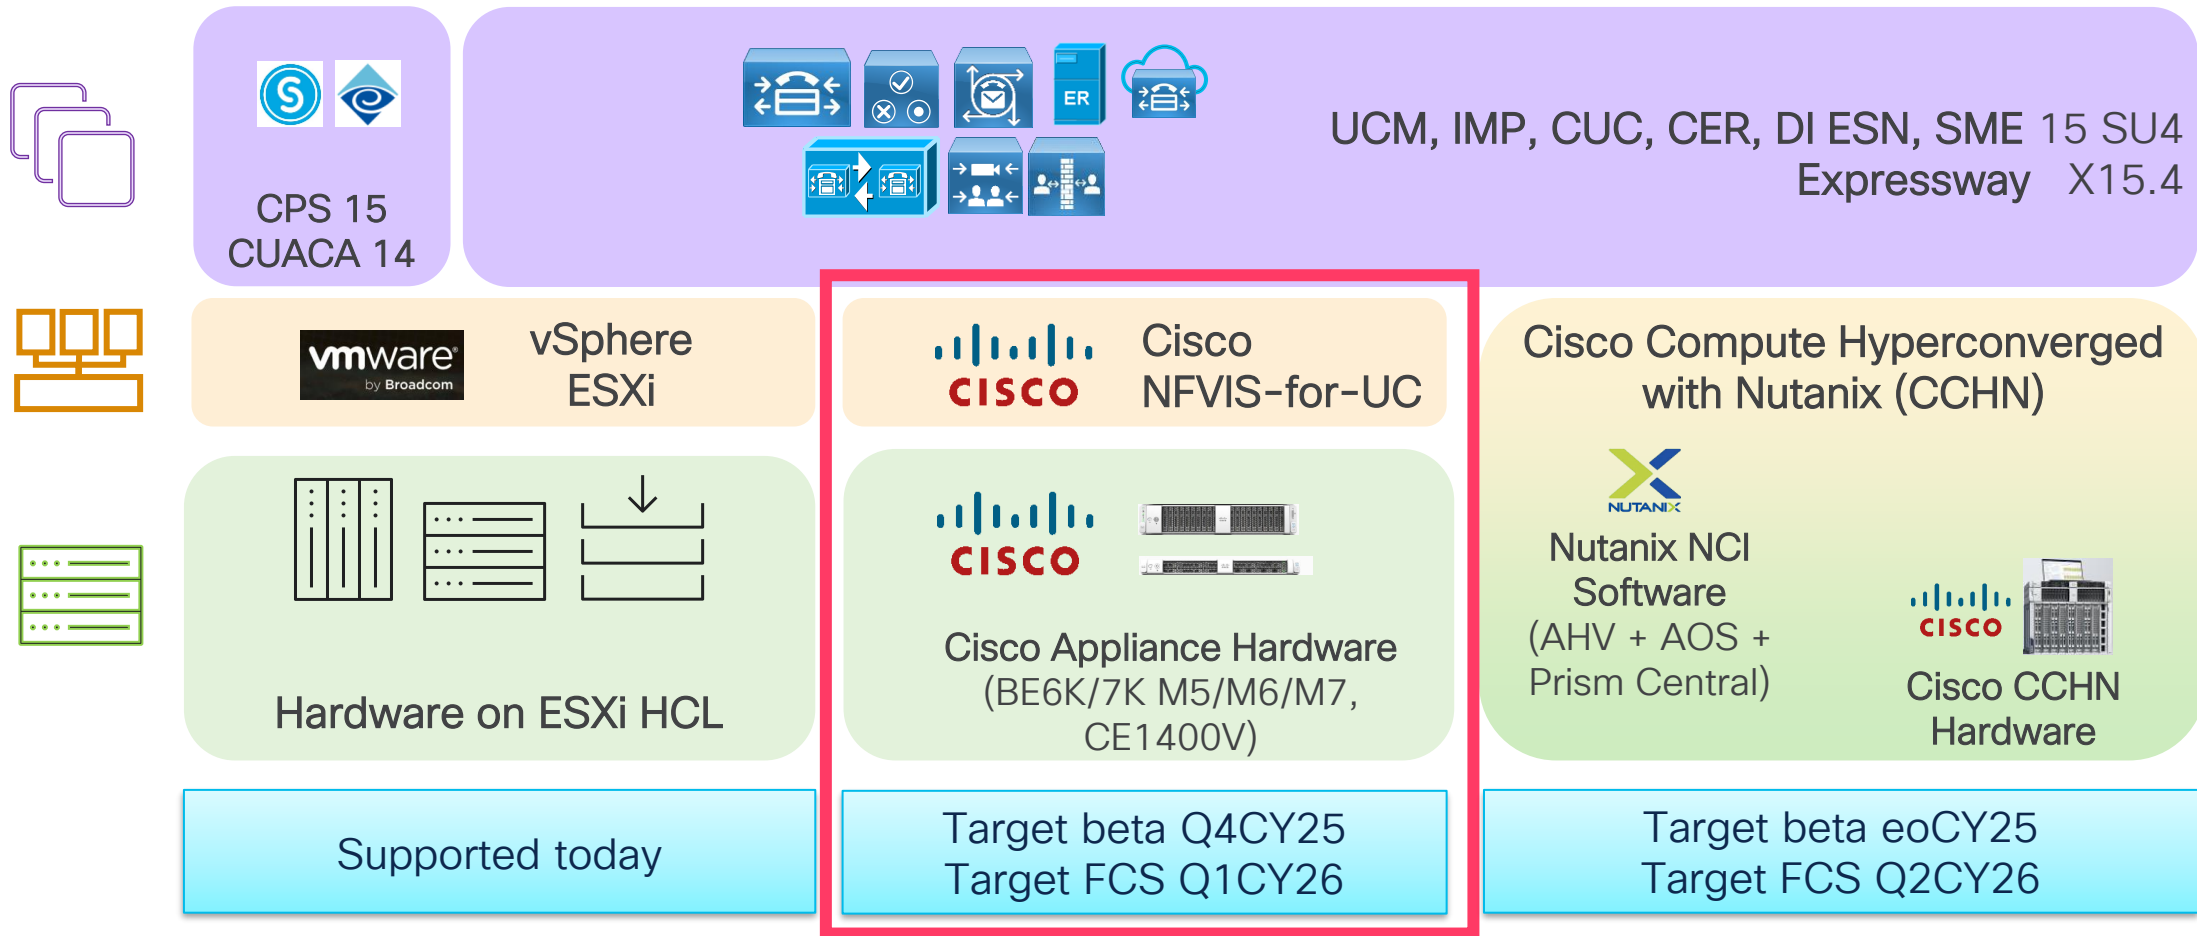



What is Cisco NFVIS?

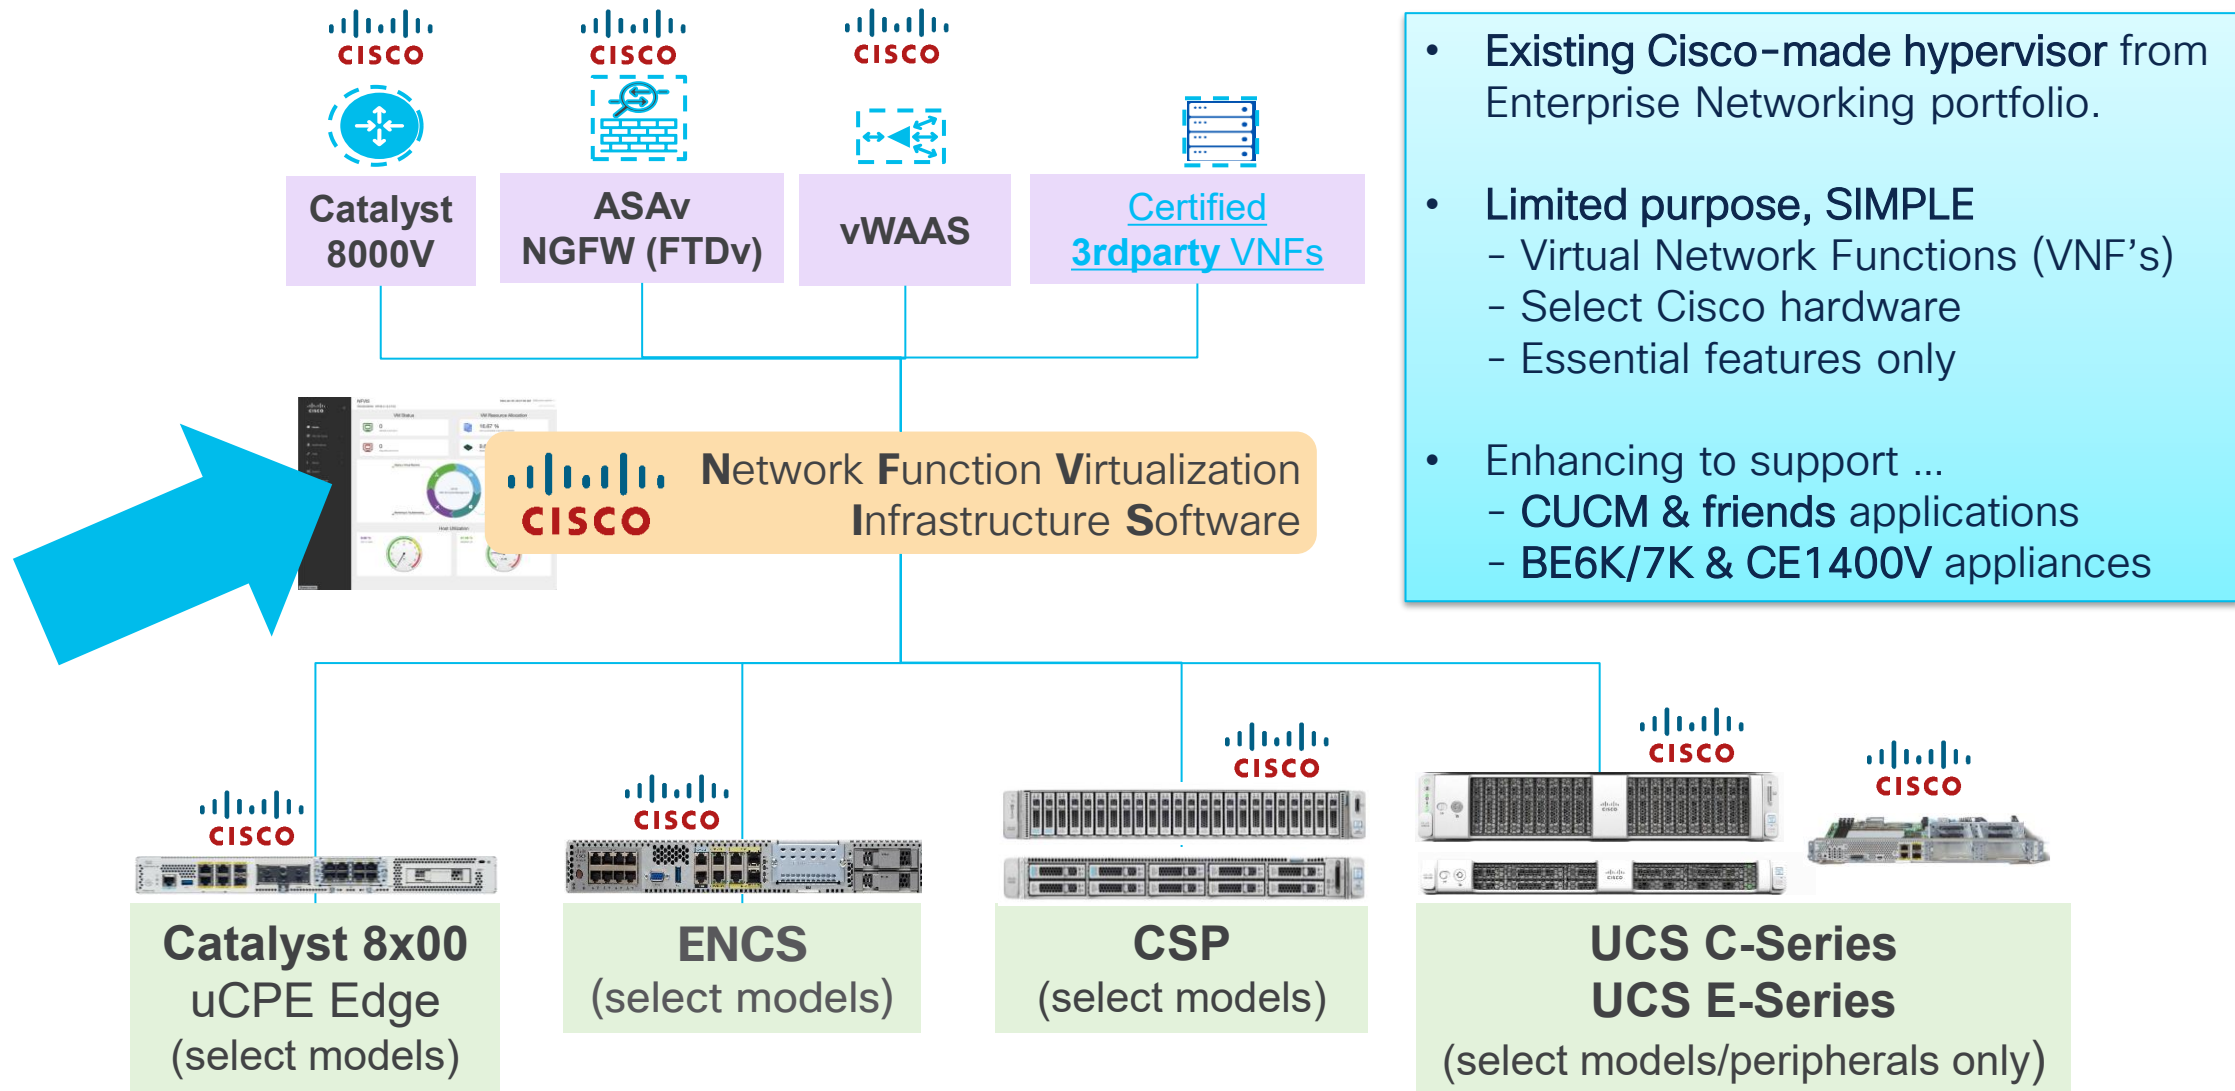

One Cisco Approach

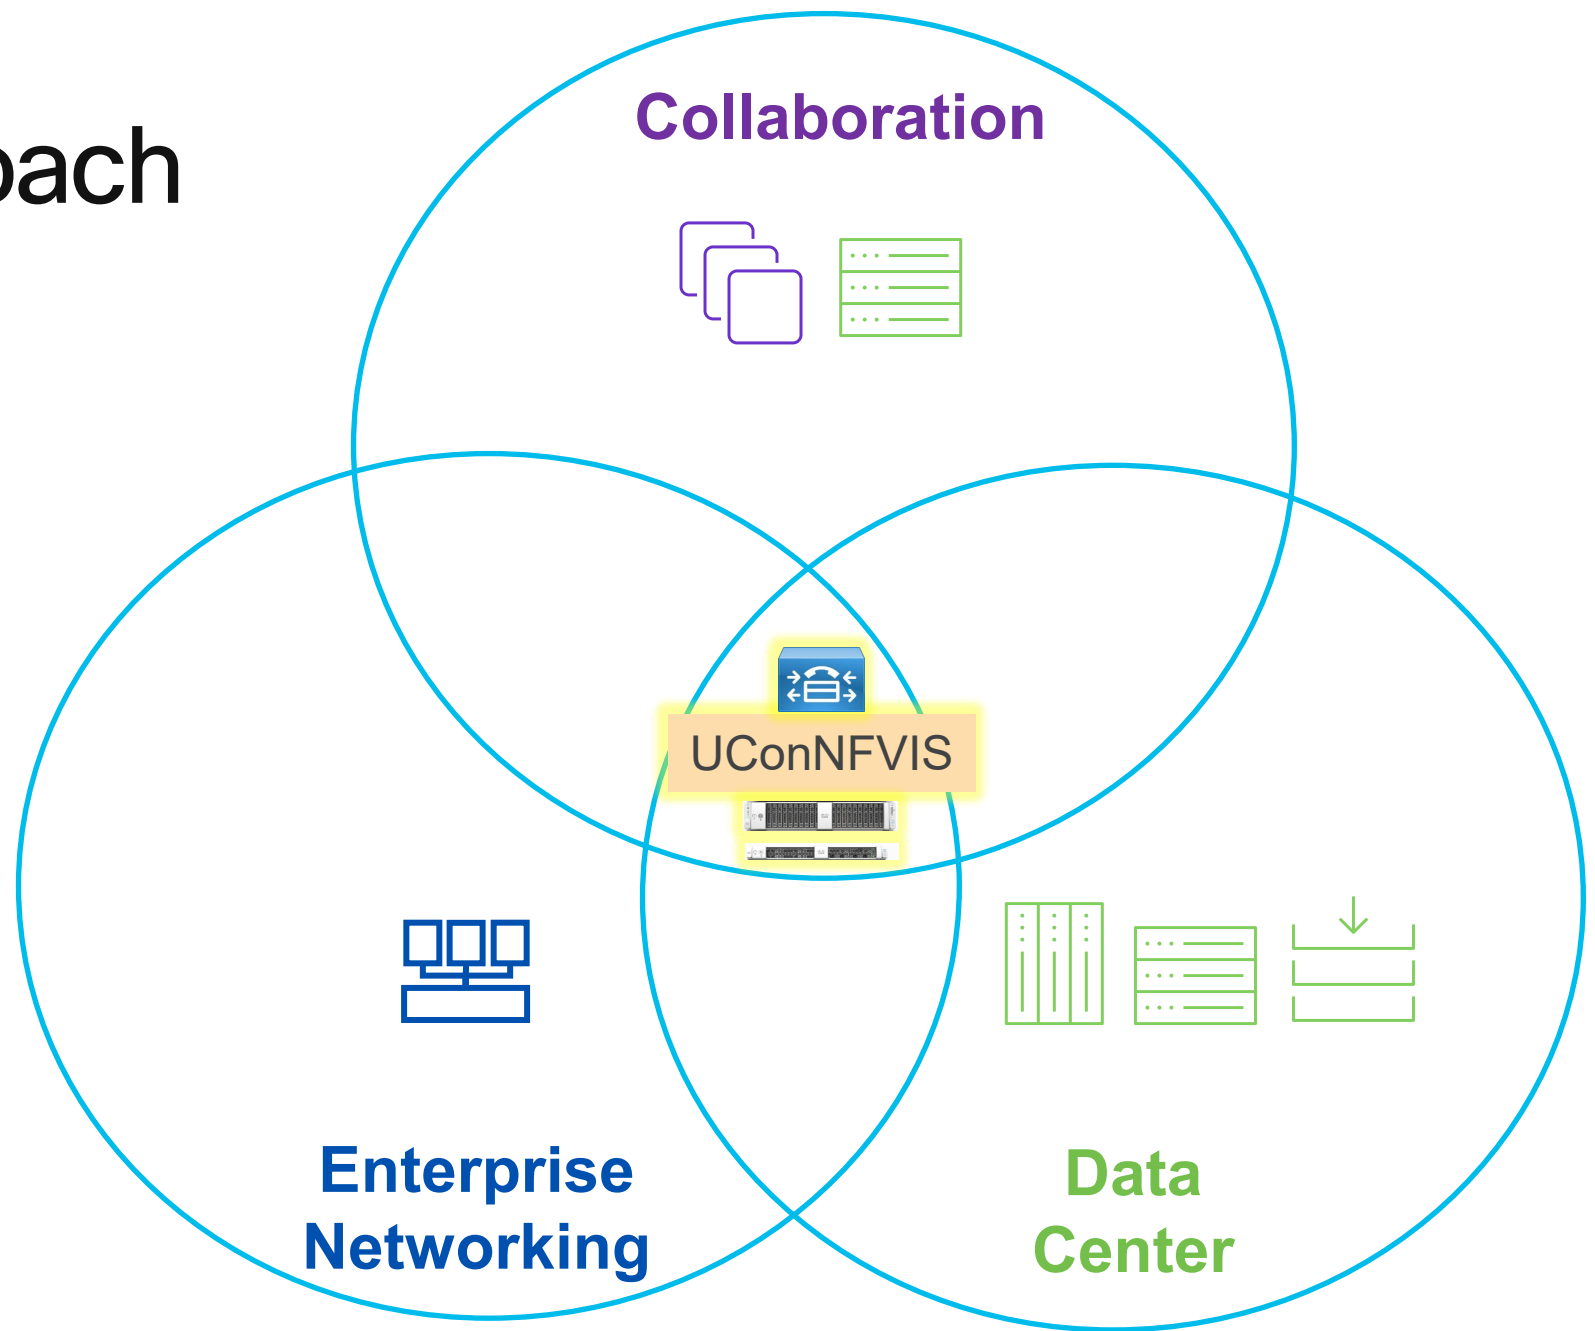

NFVIS for Networking vs. NFVIS for Collaboration

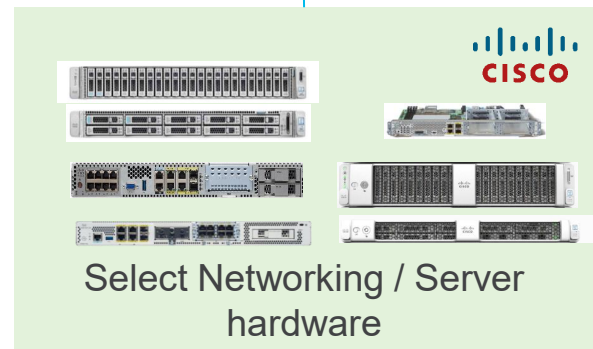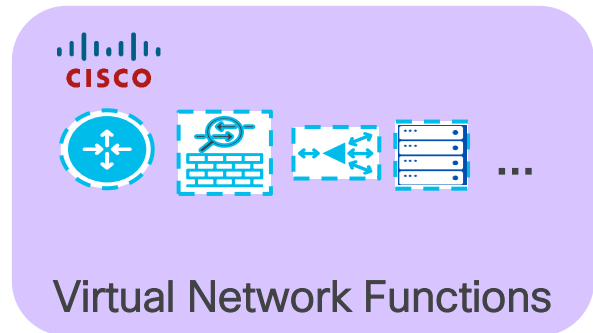


- Different SKUs/commercials
- Different Application support
- Different Hardware support
- Slightly different GUIs



Highlights of ESXi vs. NFVIS


Primary Admin interfaces

Centrally manage multiple ESXi hosts

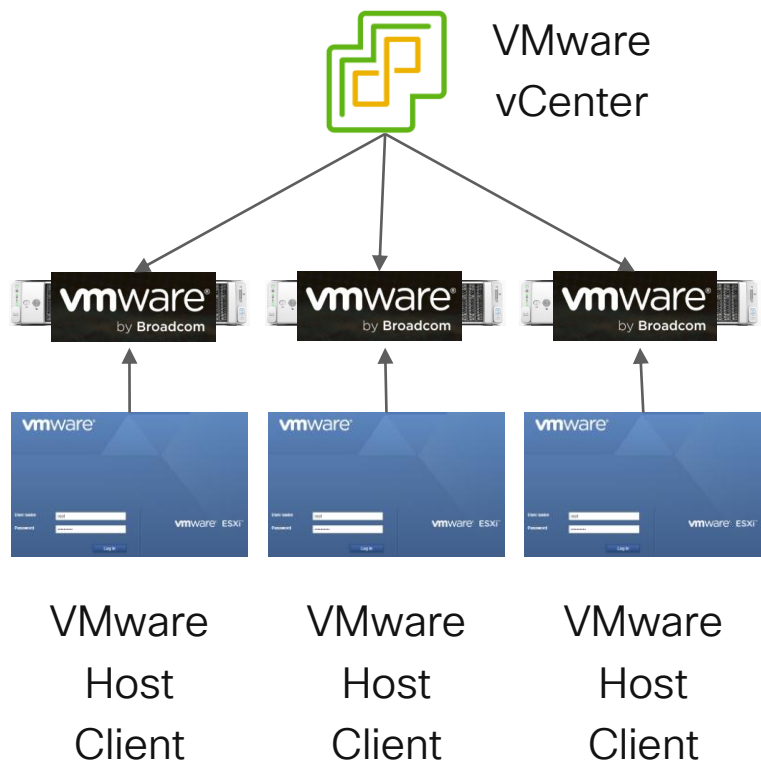

Manage a single ESXi host


Centrally manage multiple NFVIS hosts

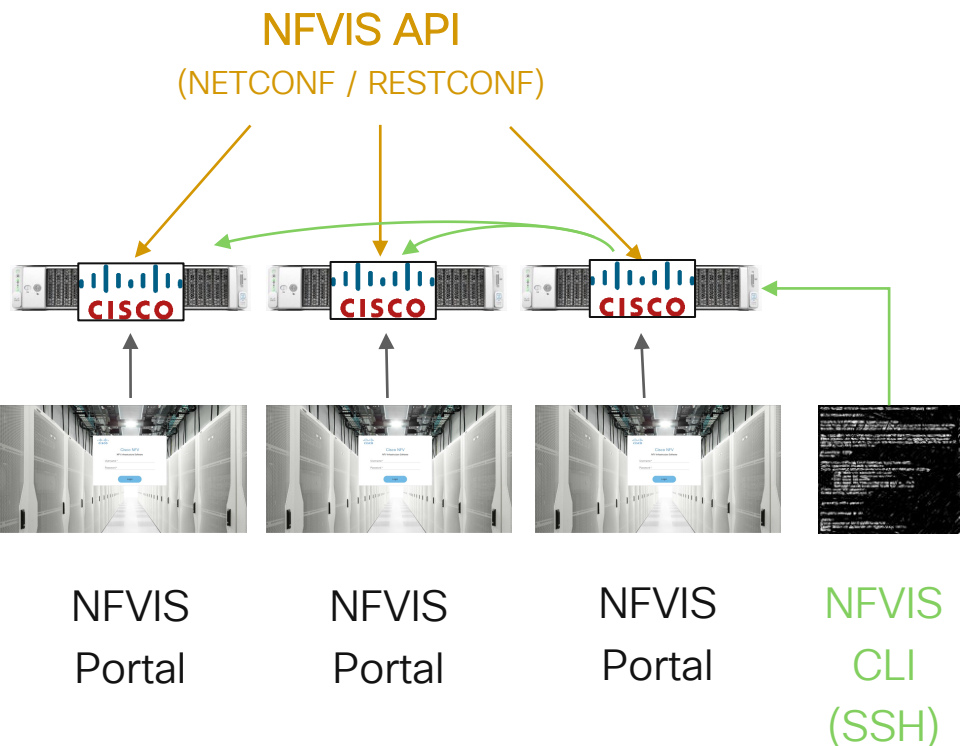

Manage a single NFVIS host

Highlights of ESXi vs. NFVIS (cont'd)

Versioned Components in Software Stack to Manage

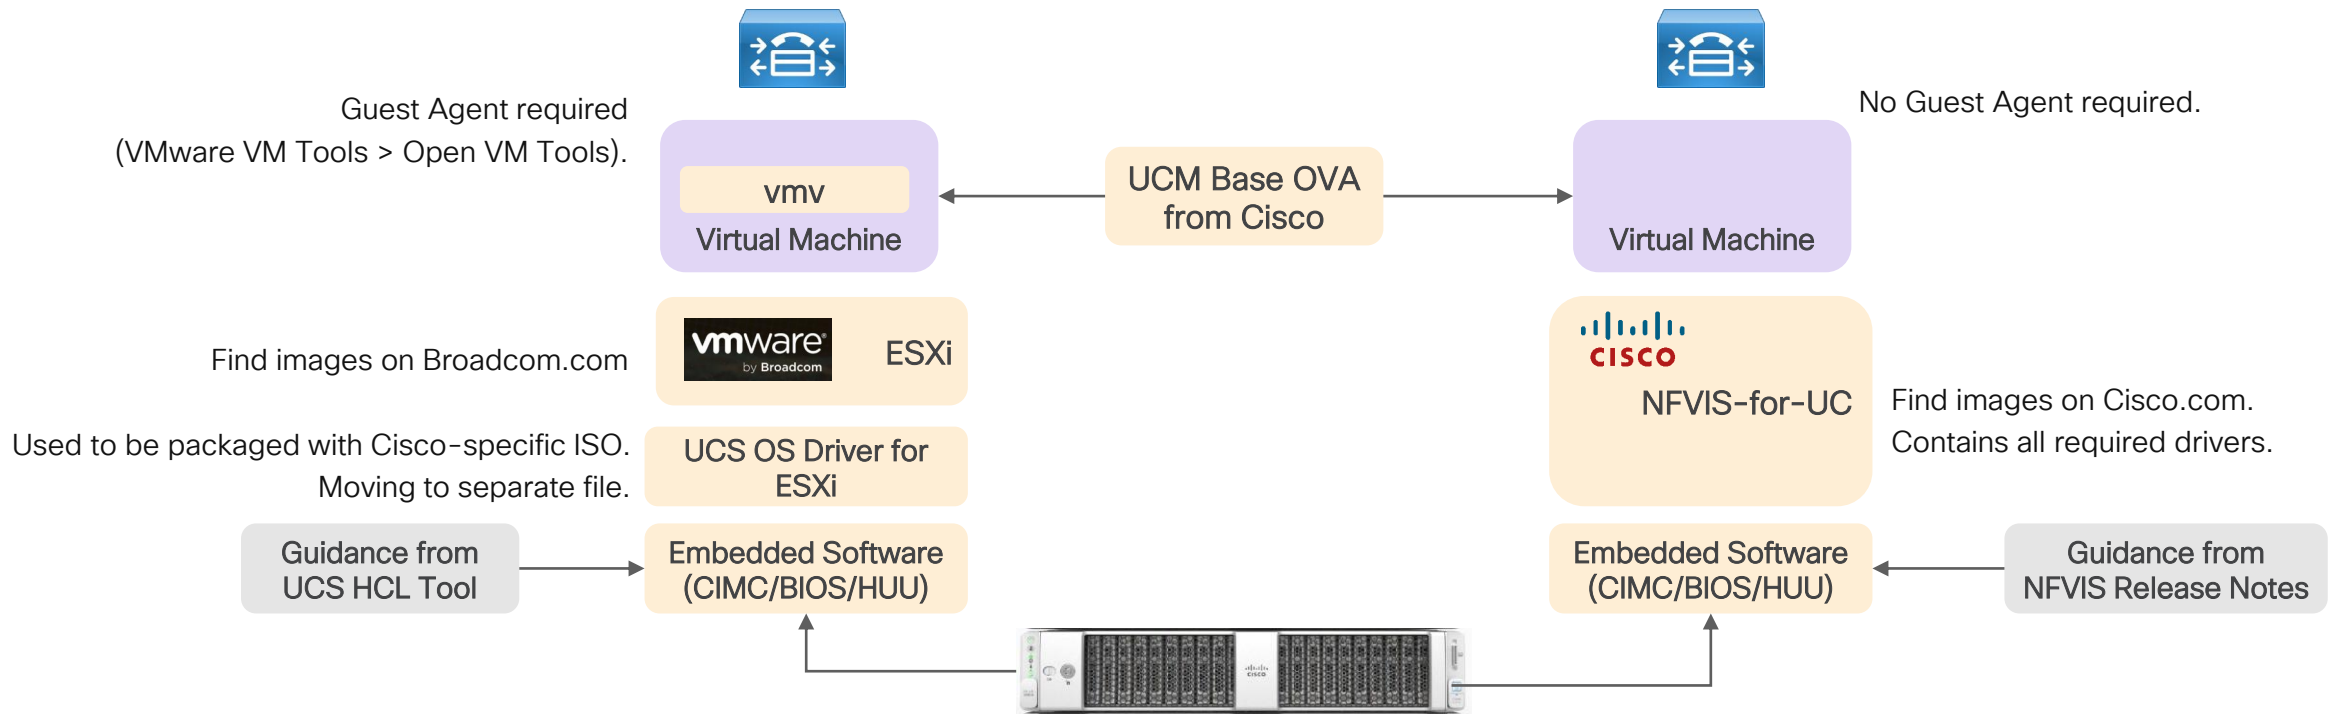

Who is NFVIS-for-UC a good fit for?

Over half our customers...

UC-centric deployment where Limited-purpose Solution meets needs:

- Calling departments of all sizes, but especially 200–5K users.
- Only need Cisco Calling apps (no 3rdparty, homegrown or “rest of Cisco”).
- “Telecom Tom/Tina” admin skillset & expectations.
- Hardware already Appliance, or ok to be.
 - BE6K / BE7K / CE1400V ok.
 - Don’t need ultra-dense CPU’s, blades, 3rdparty compute/storage, SED, VIC, etc.)
- Only needs essential features & low technology religion.
 - Basic hypervisor with Cisco support ok.
 - Don’t need bare-metal servers, containers, KubeVirt, public cloud, another proprietary hypervisor or a customer-provided open-source solution.



Advantages of NFVIS-for-UC

- **Perfect fit for UC-centric deployments**
 - Purpose-built for Network admin = also great for Calling admin.
- **Keep your Calling solution right-priced**
 - Appliances are cost-effective, leverage or acquire.
 - Cisco NFVIS-for-UC provides predictability.
- **No drastic Calling deployment changes**
 - On-premises friendly: Airgapped? Regulated? No problem!
 - Keep your Applications' Deployment Models, Scale, VM count / mix / placement.
- **Peace of mind**
 - No more “disruption fatigue”. Call Cisco for Applications + Hypervisor + Hardware.
 - Cisco NFVIS-for-UC will be around as long as UCM and BE6K/7K will be.



Get hypervisor back out of the way of providing a great Calling experience!

Example NFVIS-for-UC Deployments


Typical Customer 200 users

Solution

- Single site, single-cluster
- <1K users, <1200 devices
- Core UC apps upgrade to 15 SU4 / X15.4.
- Hypervisor Cisco NFVIS-for-UC 4.18.x.
- Reuse redundant BE6K M6 appliances.

Customer careabouts

- UC-friendly, airgap-friendly.
- High uptime migration / no UC refactoring.
- Maintain High Availability.
- Sweat assets.
- One-stop-shop support (from Cisco).

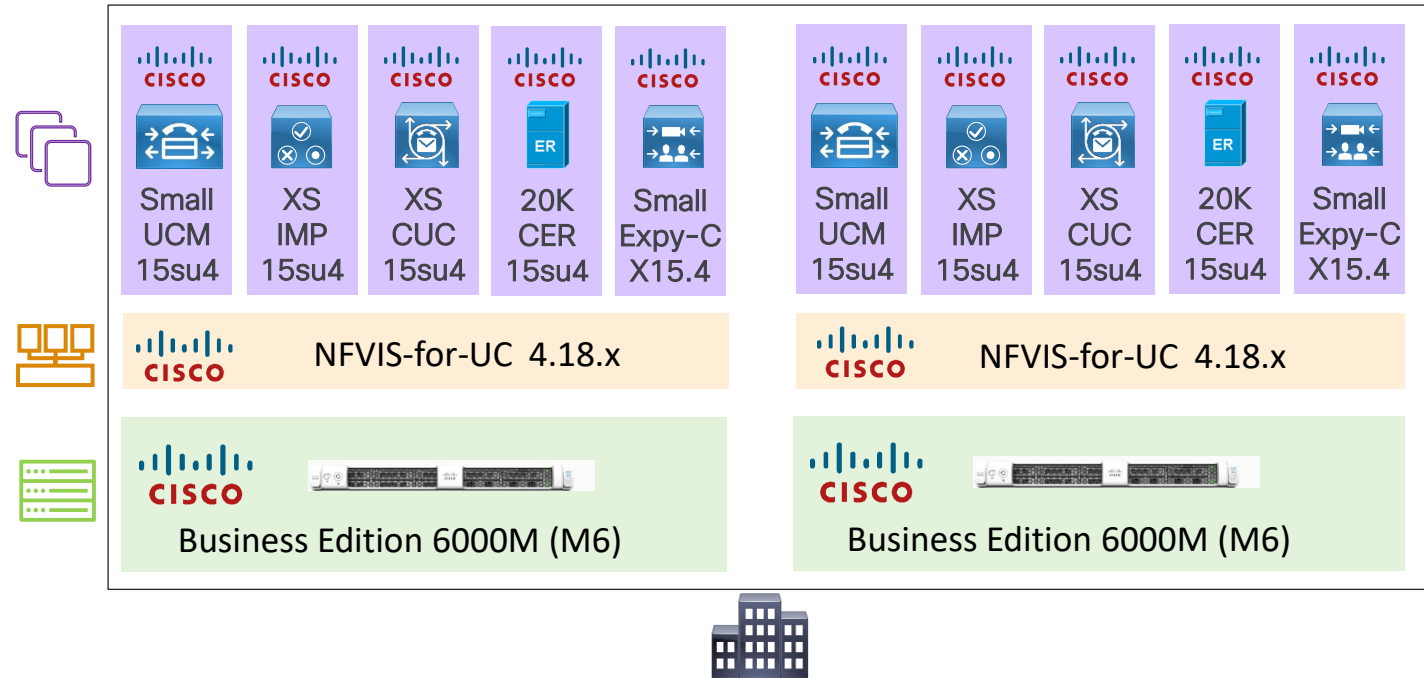

Example NFVIS-for-UC Deployments


Typical Customer 2.5K-5K users

Solution

- Single site or dual-site, single-cluster
- <5K users, <5K devices
- Core UC apps upgrade to 15 SU4 / X15.4.
- Hypervisor Cisco NFVIS-for-UC 4.18.x.
- Migrate to redundant BE7K M6 appliances.

Customer careabouts

- UC-friendly, airgap-friendly.
- High uptime migration / no UC refactoring.
- Maintain High Availability.
- Cost-effective infrastructure.
- One-stop-shop support (from Cisco).

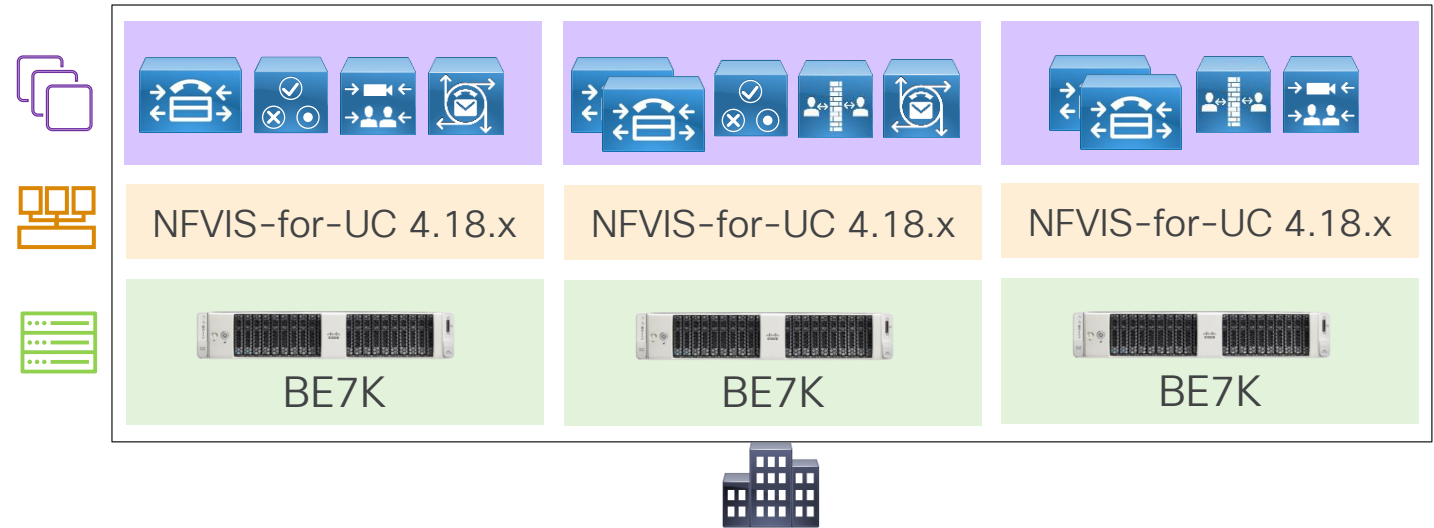

Example NFVIS-for-UC Deployments (cont'd)


Large Healthcare Customer 12K users

Solution

- Multi-site, multi-cluster
- 12K users, 10K's of devices
- Core UC apps upgrade to 15 SU4 / X15.4.
- Mixed Hypervisor: Cisco NFVIS-for-UC 4.18.x and VMware ESXi remnant.
- Recent refresh BE7K+CE1400V M7 appliances.

Customer careabouts

- UC-friendly, airgap-friendly.
- High uptime migration / no UC refactoring.
- Maintain High Availability / Survivability.
- Cost-effective infrastructure / renewal.
- One-stop-shop support (from Cisco).

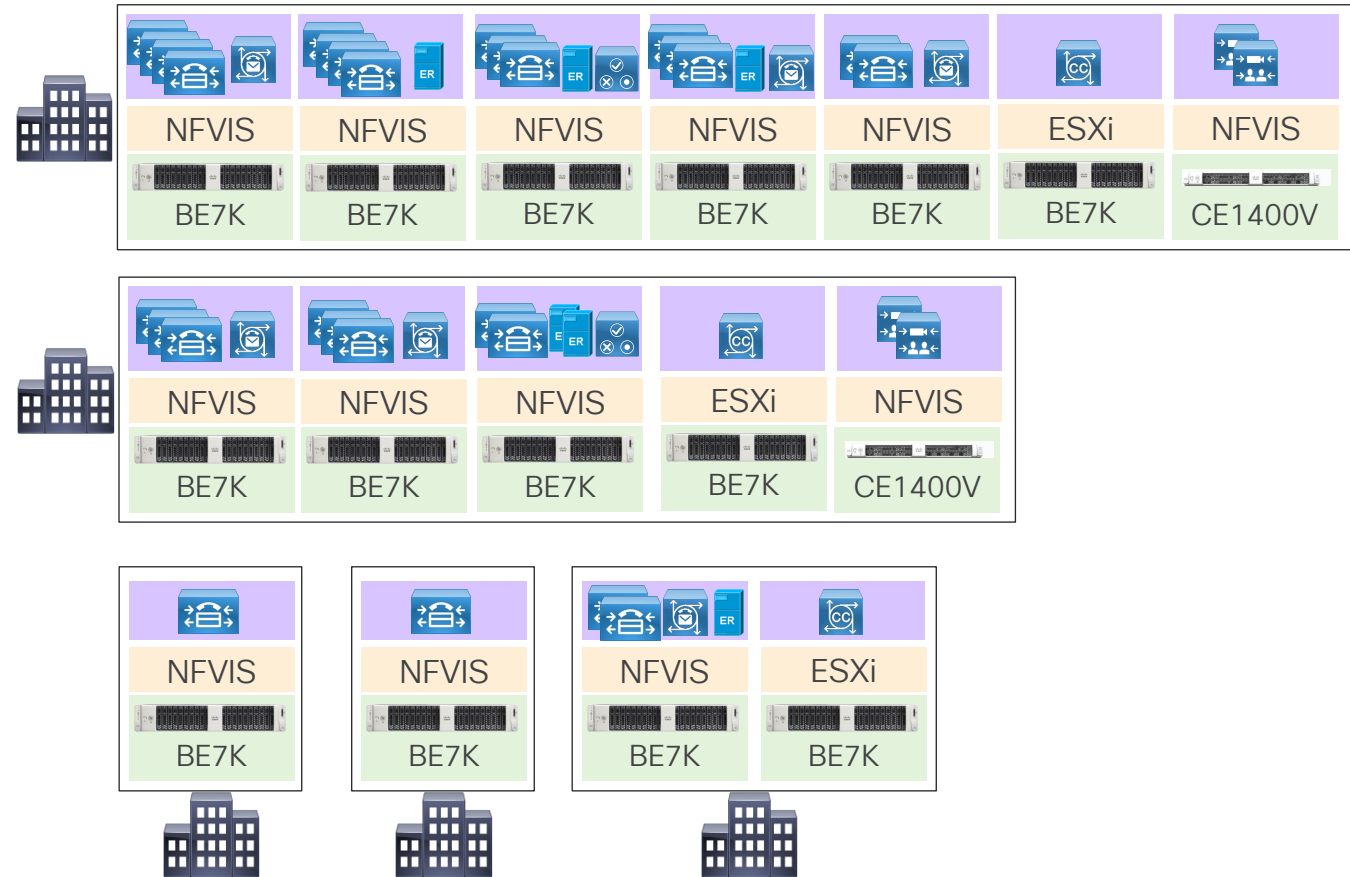

ESXi > NFVIS Migration Planning

- General Migration Prep
- Software Version & Hardware Compatibility Planning
- Hardware Prep
- NFVIS-for-UC Setup
- Deploying VM's and Migrating Applications

NFVIS-for-UC Discovery Checklist

Compare with [UCM 15 upgrade discovery checklist](#).

Product Support Entitlements

- Ensure **Collaboration Flex** Subscription in place.
- Ensure **NFVIS-for-UC** Subscription in place.

On Prem Applications

- ID your Cisco Apps that will support NFVIS-for-UC.
- Other Cisco/3rdparty/homegrown apps need to stay ESXi or do something else.

Scope of Upgrade

- Apps will need to upgrade to 15 SU4, with all that entails.
- ESXi > NFVIS is a replatform, with all that entails.
- Anything else? (site move, change HW, readdress?)

NFVIS-for-UC Version

- 4.18.x required (FCS will determine min release & compatibility matrix plans)

Hardware

- HW SN in CCW-R must be BE6K/7K or CE1400V.
- CIMC Base PID must show as BE6K/7K or CE1400V.
- Exact peripherals loadout required. HUU/CIMC/BIOS update?

End Points / Devices

- Mainly to see if any gotchas vs. 15 SU4.

Recap: CUCM-Supported Infrastructure Stacks





	Supported Hypervisors
15 SU4	  
15 FCS to SU3	
14x, 12.5 NovCY23+	


Multi-hypervisor interim during migration ?

Same Application, Same Cluster = **Same Hypervisor** required!
...even if Clustering over WAN (CoW) for geo-redundancy!

Same Application, *Different* Clusters = **Different Hypervisors** ok.
...Expressway-C clusters vs. -E clusters can also be *Different* Hypervisors.

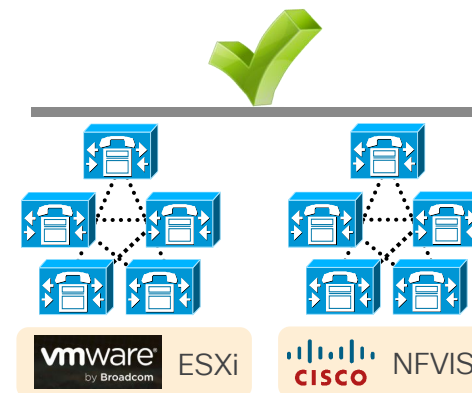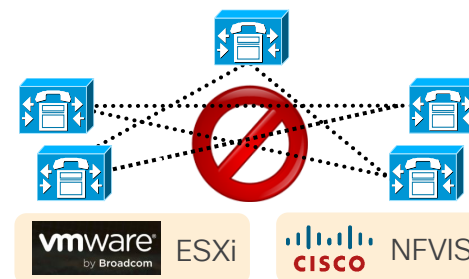

Different Applications = **Different Hypervisors** ok.

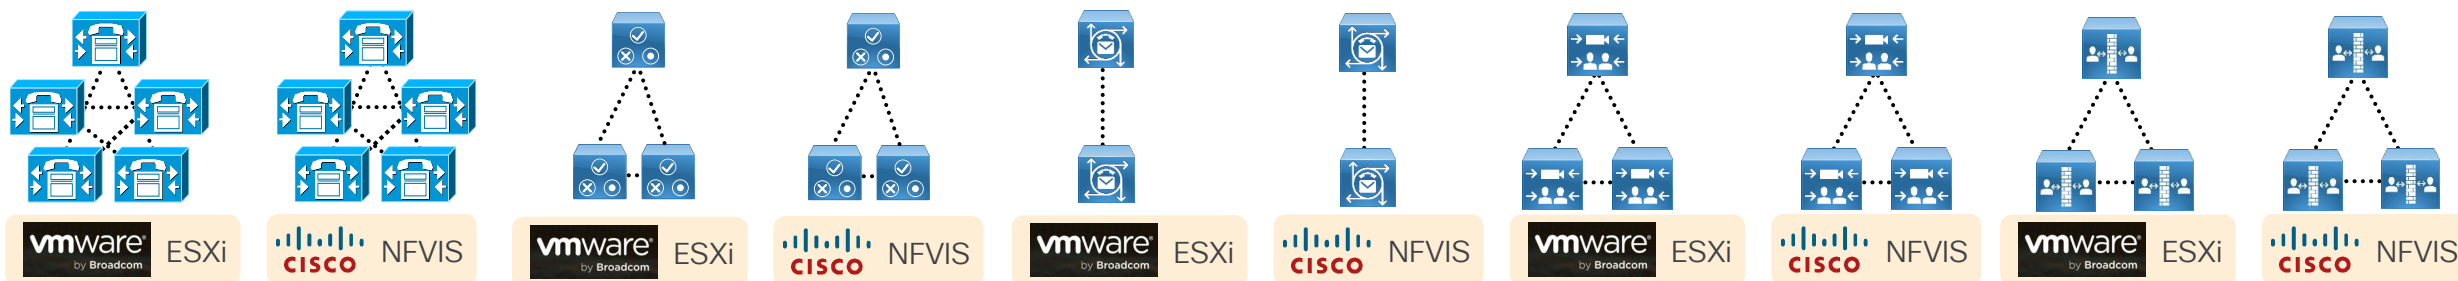

Software Version & Hardware Planning

(circa Q4CY25-Q1CY26)



		UCM 12.5/older	UCM 14					UCM 15 SU4		
		VMware ESXi	VMware ESXi				VMware ESXi	Cisco NFVIS-for-UC		
EOL? ↓→		7.0 & older	6.7 & older	7.0	8.0	9.0	7.0	8.0	9.0	4.18.x
BE6K/7K 	M7									Target Q1CY26
	M6									Target Q1CY26
	M5									Target Q1CY26
	M4 & older									
UCS 	M8									
	M7									
	M6									
	M5									
	M4 & older									

Good to go...

Support ramping down

Something's NOT supported!


Roadmap, subject to change

Recommended for get current


Unsupported combinations:

- Any issues caused by esxi 7.0 / older.
- No 12.5 on esxi 8.0+
- No 14 on esxi 9.0+ or 6.5 / older.
- No 15 on esxi 6.7 / older.
- UCS M8 requires ESXi 8.0 U3+.
- No NFVIS on pre-15 SU4.
- No NFVIS on hardware that is not BE6K, BE7K, CE1400V.

Applications Supported on NFVIS-for-UC

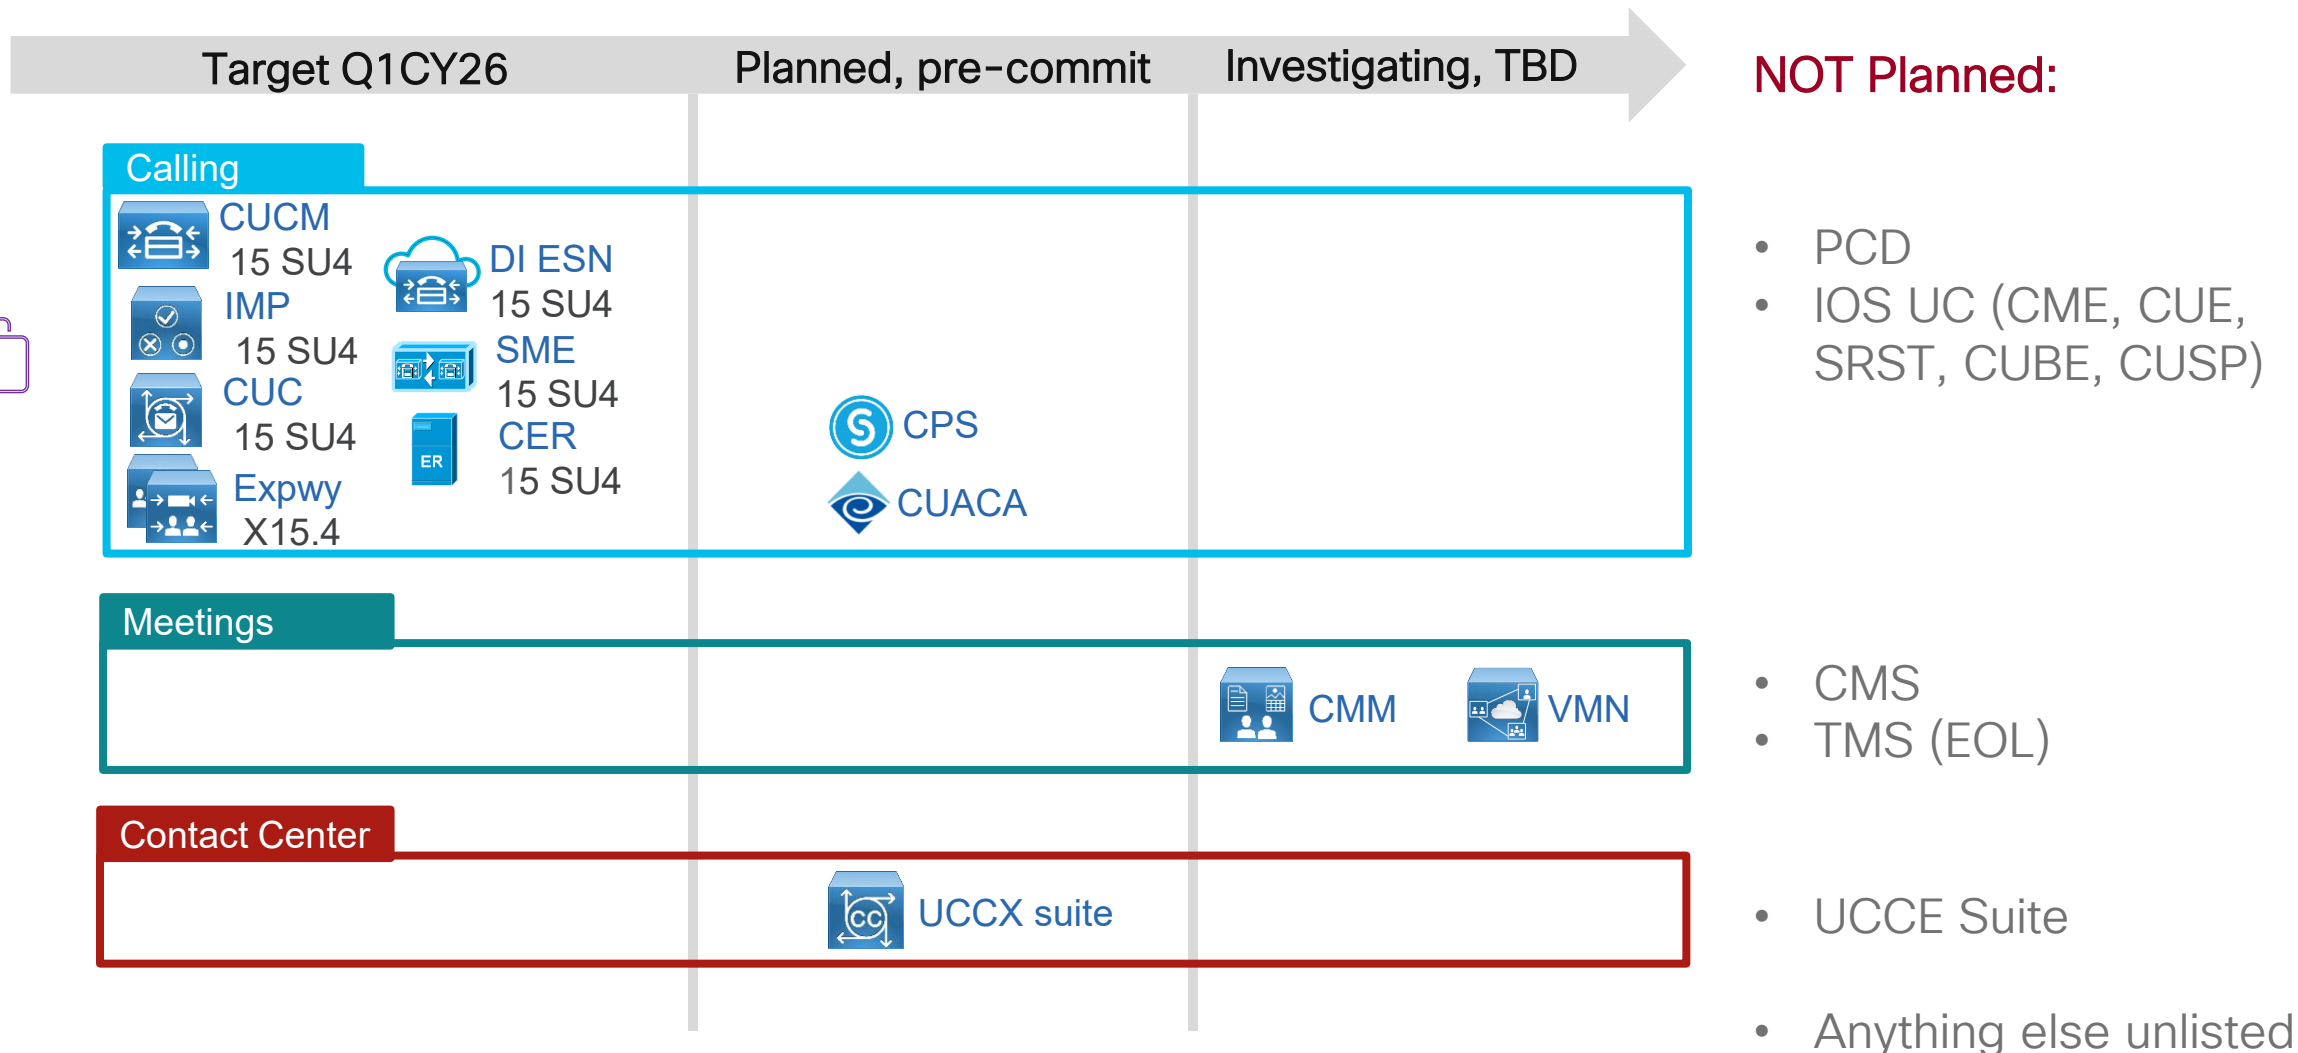

NFVIS-for-UC Supported Hardware

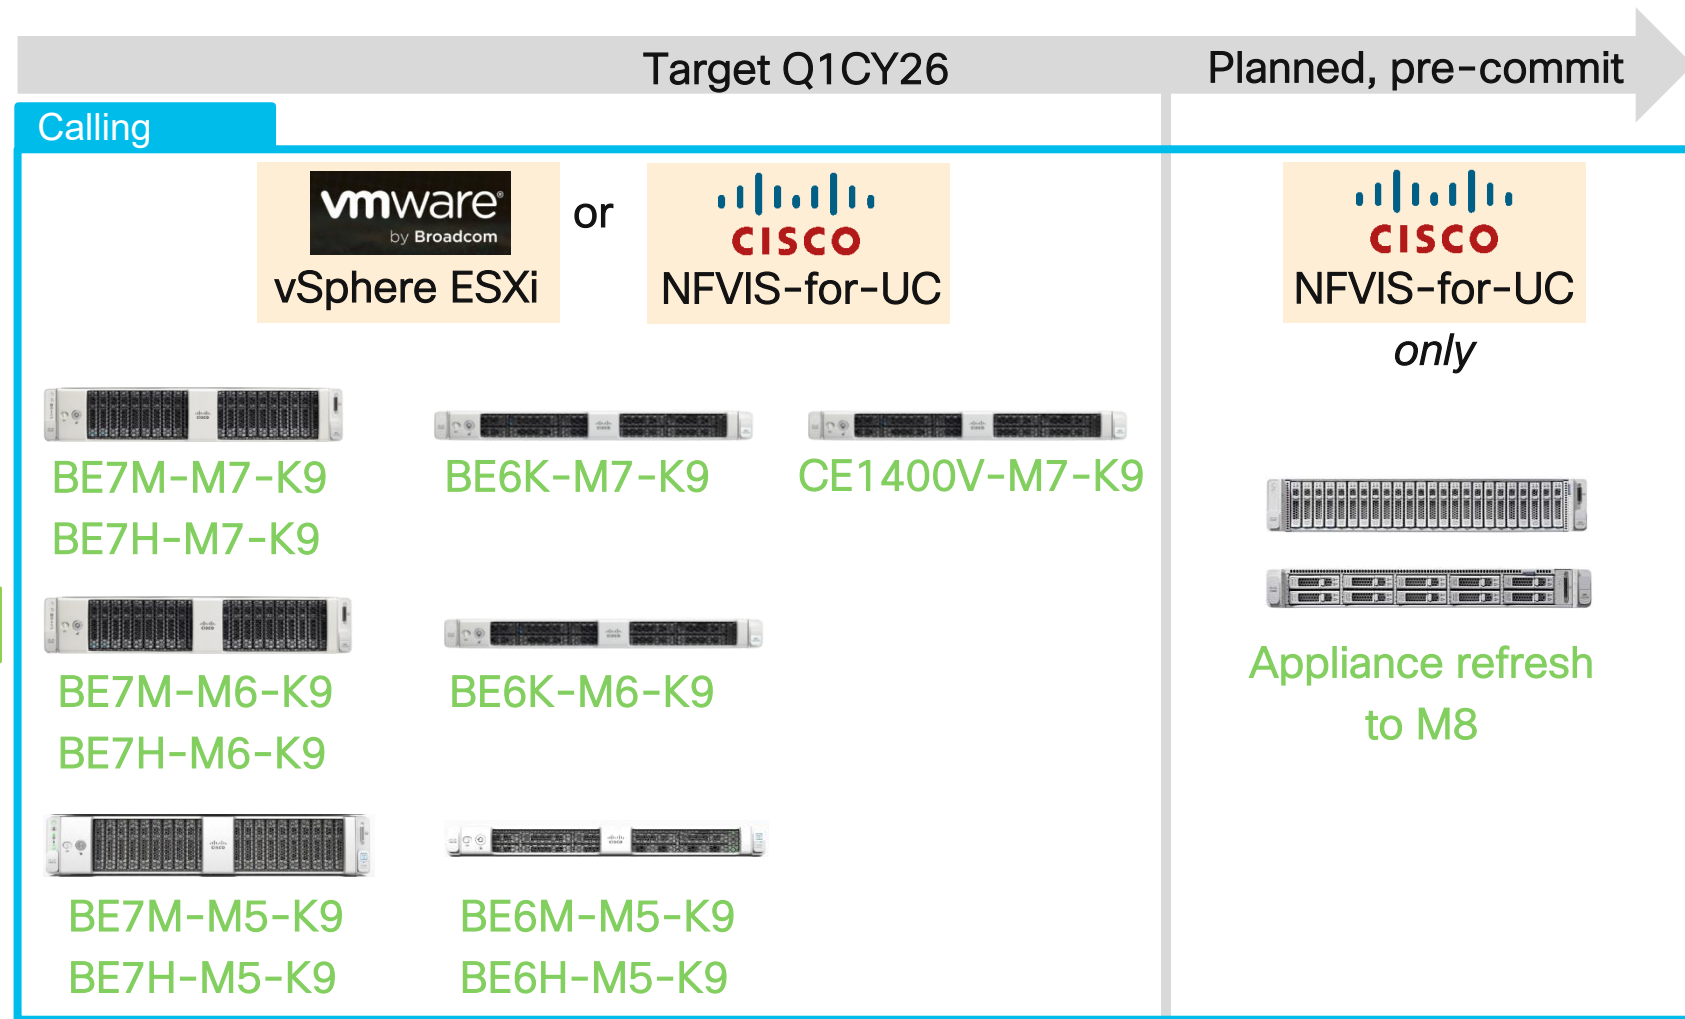

NOT Planned:

- General-purpose hardware
 - UCS C/B/X/E/S-Series
 - HX/HCI/HCI-X-Series
 - Expanded models or peripherals
- 3rdparty compute
- 3rdparty storage (NAS, SAN, HCI)
- Mods to BE6K, BE7K, CE1400V appliance hardware loadouts.
- Anything else unlisted.

Appliance Firmware for NFVIS-for-UC (CIMC/BIOS/HUU from leveraged UCS)

Do NOT use “the [UCS HCL Tool](#)”.
NFVIS-for-UC not covered there.



UCS C-Series 240 M6 Rack Servers	BIOS	C240M6.4.3.2c.0.0726232000
	CIMC	HUU version 4.3(2.230207)
UCS C-Series 220 M7 Rack Servers	BIOS	C220M7.4.3.5a.0.0905240935
	CIMC	HUU version 4.3(5.240021)
UCS C-Series 220 M6 Rack Servers	BIOS	C220M6.4.3.2c.0.0726232000
	CIMC	HUU version 4.3(2.230207)
UCS C-Series 240 M7 Rack Servers	BIOS	C240M7.4.3.5a.0.0905240935
	CIMC	HUU version 4.3(5.240021)
UCS C-Series 220 M5 Rack Servers	BIOS	C220M5.4.1.3i.0.0713210713
	CIMC	HUU version 4.1(3d)
UCS C-Series 240 M5 Rack Servers	BIOS	C240M5.4.1.3i.0.0713210713
	CIMC	HUU version 4.1(3d)

 UCS Hardware and Software Compatibility

Search By : Servers

Server Type : C-Series

Server Model : Cisco UCS C220 M7S

Processor Version : 5th Gen Intel Xeon Processor Scalable Family

Operating System : Search or Select Operating System (e.g "VMware, Microsoft, RedHat")

Operating System Version :

- Citrix
- Microsoft
- Oracle
- Red Hat
- Rocky Linux
- SuSE
- Ubuntu
- VMware



DO use NFVIS Release Notes > Supported Platforms.
E.g. from [4.18.1 RN](#) (C220 for BE6K/CE1400V, C240 for BE7K).

Fresh Installing NFVIS-for-UC

- Images on software.cisco.com
- See [Getting Started Guide](#) > Install Cisco Enterprise NFVIS Using CIMC > Install NFVIS on USC C-Series Servers and CSP Platforms

Software Download

[Downloads Home](#) / [Routers](#) / [Network Functions Virtualization](#) / **Enterprise NFV Infrastructure Software**

Select a Software Type

[Cisco owned VNF image package files for vManage SD Branch](#)

[ISRV Software](#)

[Meta data scaffold files for non Cisco VNFs for vManage SD Branch](#)

[NFV Infrastructure Software](#)

[Book Title Page](#)

[About Cisco Enterprise NFVIS](#)

[Set Up Cisco Enterprise NFVIS](#)

[Install Cisco Enterprise NFVIS Using CIMC](#)

[Install Cisco Enterprise NFVIS Using USB](#)

[Upgrade Cisco NFVIS](#)

Install NFVIS on USC C-Series Servers and CSP Platforms


UCS-C series devices has to configure RAID disk group before installing NFVIS. UCS-C supports only single RAID disk group for fresh installation.



Note

- Starting from Cisco NFVIS 4.6.1 release, USC C-Series Servers and CSP Platforms support upto 3 RAID groups. The first raid group is reserved for OS installation and the other RAID groups can be used as external storage drives.
- Starting from Cisco NFVIS release 4.8.1 till Cisco NFVIS release 4.12.1, installing Cisco NFVIS on Cisco UCS C-Series Servers aren't supported.

Managing NFVIS-for-UC

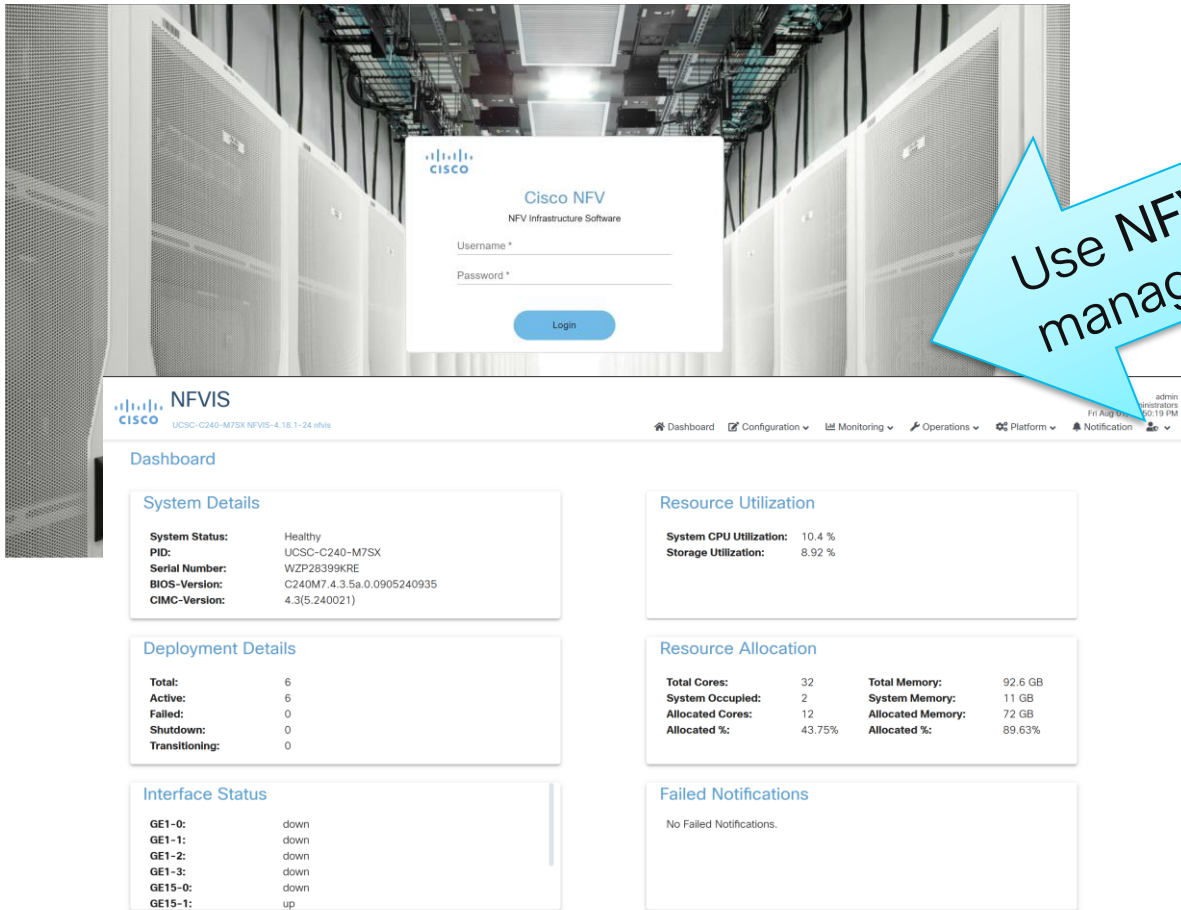

Use NFVIS Portal to manage a single host.

Use NFVIS CLI (SSH) to
1. manage one host
2. cross-launch to another

```
Cisco Network Function Virtualization Infrastructure
NFVIS Version: 4.18.1-24

Copyright (c) 2015-2025 by Cisco Systems, Inc. All rights reserved.
Cisco, Cisco Systems, and Cisco Systems logo are registered trademarks of Cisco
Systems, Inc. and/or its affiliates in the U.S. and certain other countries.

The copyrights to certain works contained in this software are owned by other
third parties and used and distributed under third party license agreements.
Certain components of this software are licensed under the GNU GPL 2.0, GPL 3.0,
LGPL 2.1, LGPL 3.0 and AGPL 3.0.

User admin failed to log in 80 times!
admin connected from 10.26.194.82 using ssh on nfvis
nfvis# [20~
```

Use NFVIS API for centralized management
(via NETCONF/RESTCONF) at...

<https://developer.cisco.com/docs/nfvis/>

`https://{nfvis_host_ip}/restconf/`

Deploying a VM for UCM 15 SU4 Attended Install on NFVIS-for-UC

(builds, per-click)


1. Login to NFVIS.
2. Navigate to Image/Profile Repository.
3. (Configuration > Virtual Machine > Images > Image Repository)
4. Upload UCM 15 SU4 files to NFVIS:
 - Bootable ISO as an [Image](#).
 - Base OVA, where each VM configuration becomes a [Profile](#).
5. Navigate to Configuration > Deploy
6. Create a VM; connect to virtual network; assign [Image](#), [Profile](#) & other settings; DEPLOY button; the VM will boot..
7. Navigate to Configuration > Virtual Machine > Manage.
8. Look at **Terminal/Console** button to see UCM's install wizard.

The screenshot shows the NFVIS interface with the following components:

- Top Navigation:** Dashboard, Configuration, Monitoring, Operations, Platform, Notification.
- Left Sidebar:** Select VM: UCM (highlighted), IMP, CUC, CER, ESN, EXPRESSWAY, SME.
- Main Area:** Network diagram showing components like GE1-3, GE2-0, GE2-2, GE2-3, GE2-1, GE15-1, GE15-0, and GE1-0. A red box highlights the 'UCM' selection in the sidebar.
- Right Panel:** Deployment Details (highlighted). Fields include: Name (OTWED23), Image (Banti-Cucm_diskSize), Profile (Banti-Cucm_diskSize-UCM-L), Group Name, VNC Password, Deployment Disk (datastore1(internal)), Low Latency (true), Bootstrap ISO, and Add Bootstrap Config.
- Bottom Panel:** Profiles table (highlighted).

#	Profile	CPU	Memory(MB)	Disk(MB)	Source Image	Action
1	15_medium_ova	2	12288	112640	cucm-6	
2	Banti-Cucm_diskSize-UCM-L	4	14336	112640	Banti-Cucm_diskSize	
3	Banti-Cucm_diskSize-UCM-M	2	12288	112640	Banti-Cucm_diskSize	

ESXi to NFVIS-for-UC Migration Summary (if already on UCM 15 SU4)

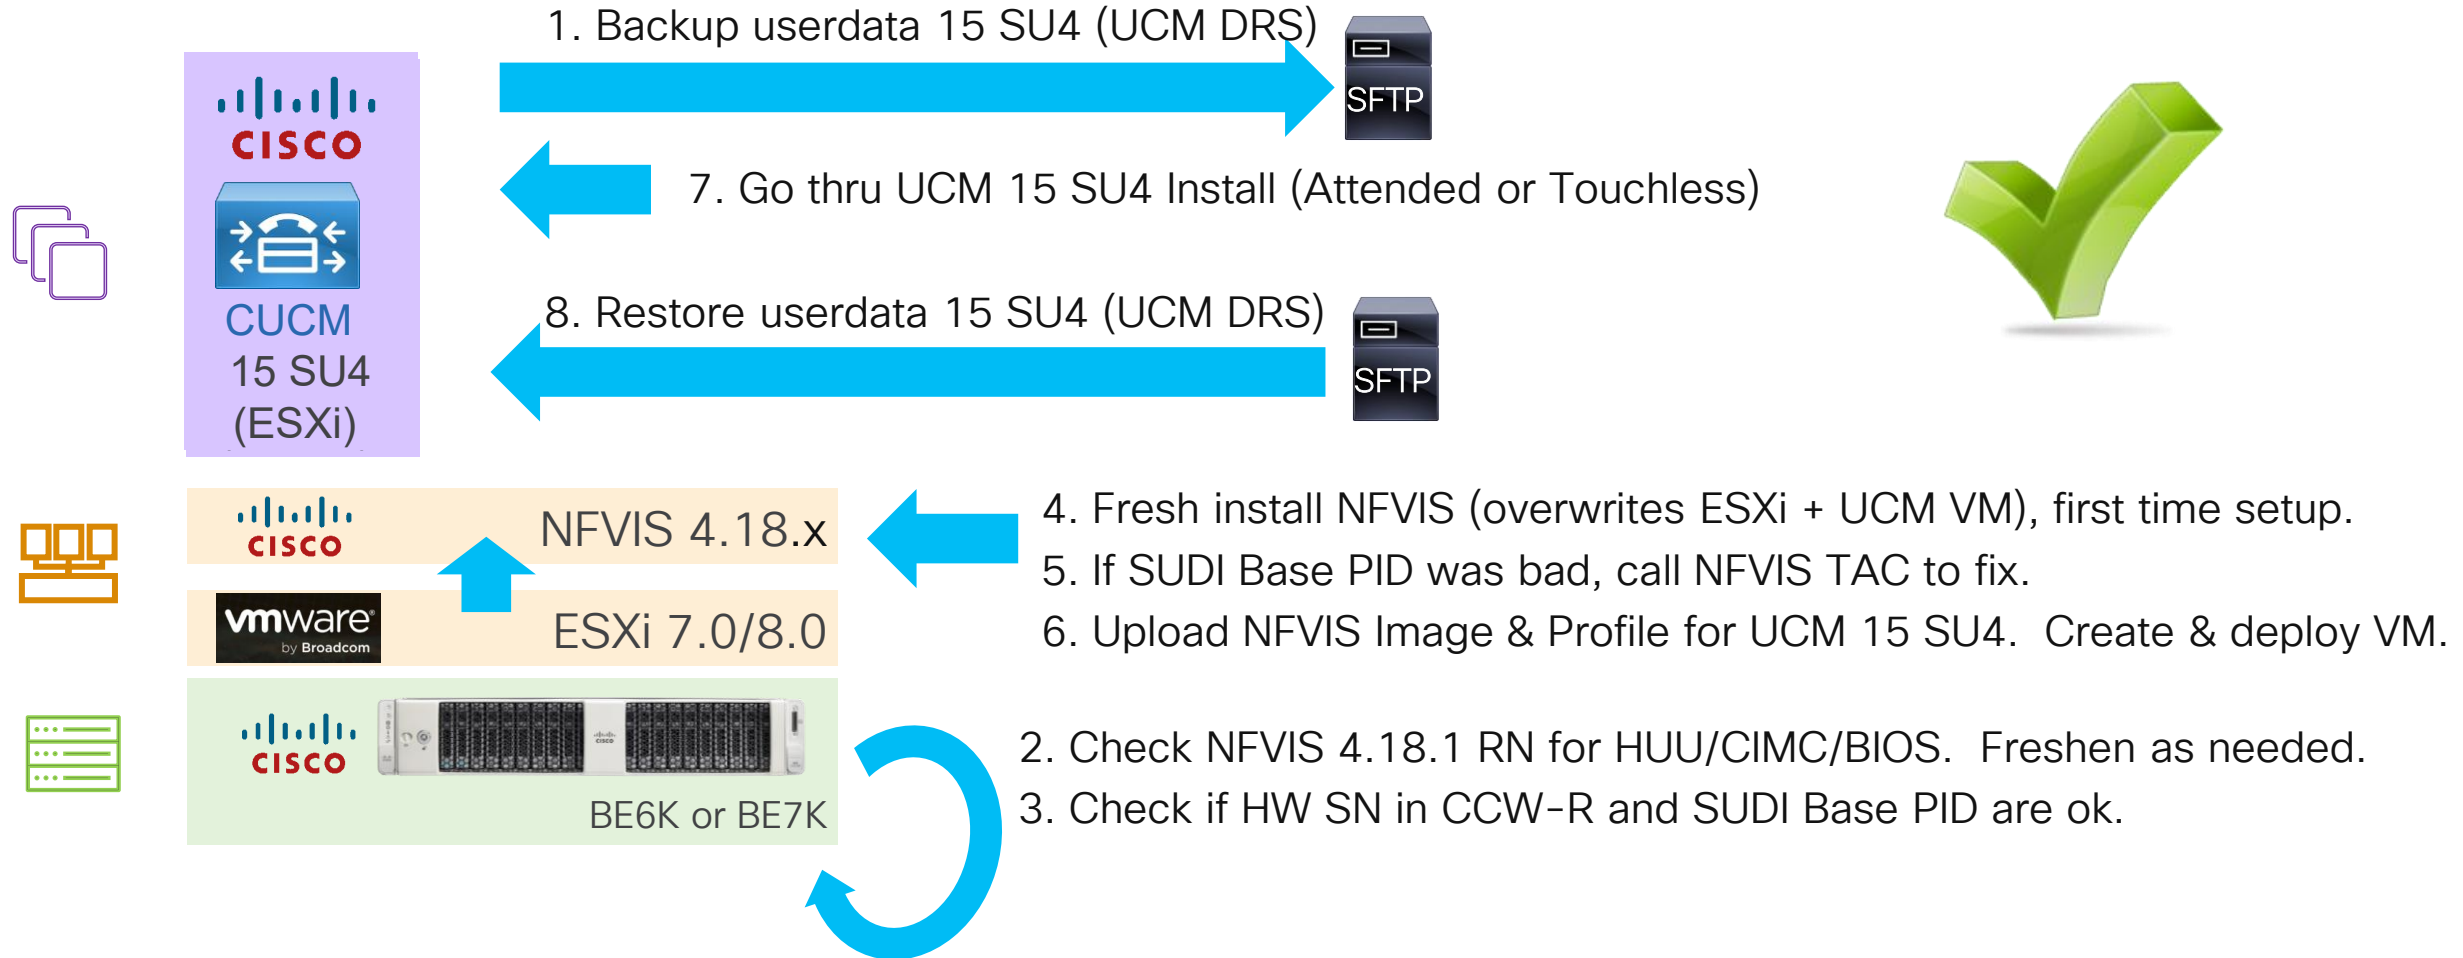


ESXi to NFVIS-for-UC Migration Summary (if still on UCM 12.5 SU5+)

1. Dataexport 12.5 (UCM CLI from
Fresh Install with Data Import)



7. Go thru UCM 15 SU4 Install (Attended or Touchless)
using field for dataimport 12.5 (from CUCM
Fresh Install with Data Import)

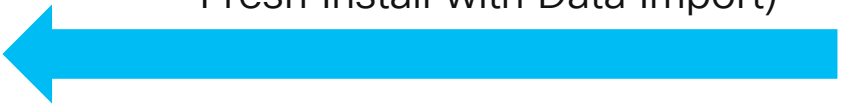


4. Fresh install NFVIS (overwrites ESXi + UCM VM), first time setup.
5. If SUDI Base PID was bad, call NFVIS TAC to fix.
6. Upload NFVIS Image & Profile for UCM 15 SU4. Create & deploy VM.

2. Check NFVIS 4.18.1 RN for HUU/CIMC/BIOS. Freshen as needed.
3. Check if HW SN in CCW-R and SUDI Base PID are ok.

Raising the bar on Security & Compliance

Cisco UC - TLS 1.3 support

Available
Now

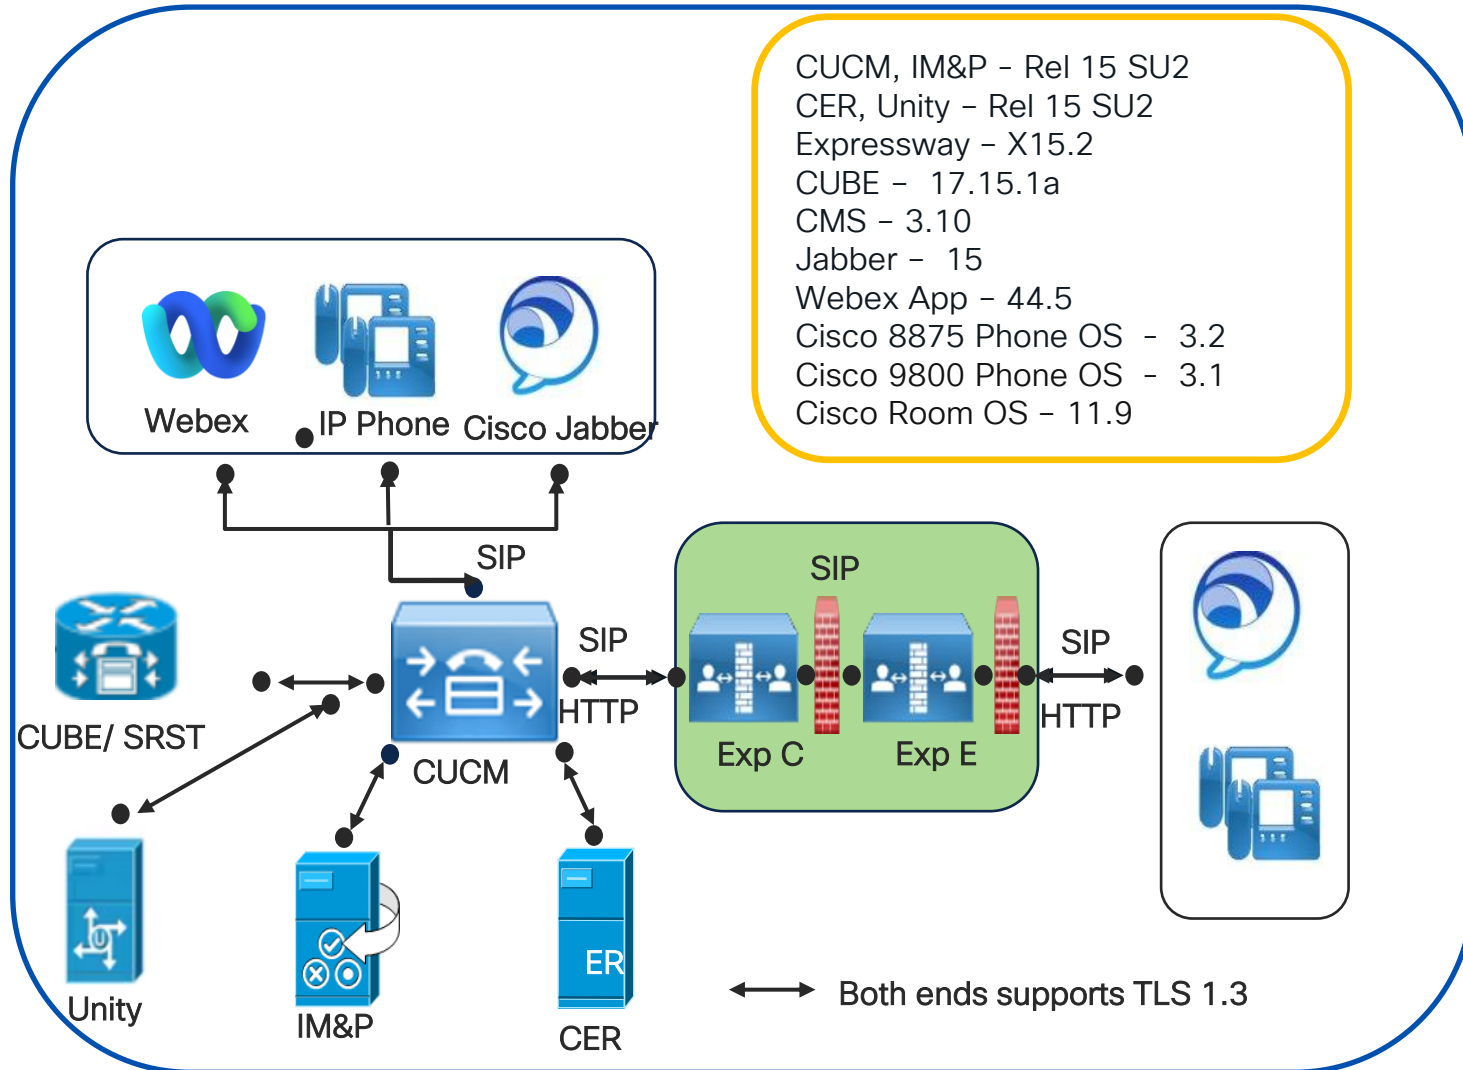

Benefits

- Improved Security – TLS 1.3 more secured than TLS 1.0, 1.1 and 1.2.
- Improved performance – Shorter handshake mechanism
- Simplified Cipher Suites – Use of simple and stronger Cipher suites

Salient Features

- Solution is backward compatible with older TLS version
- End to end support at solution level.
- Support applicable to both inbound & outbound connections.
- Fresh Install – Default TLS 1.1
- Upgrades – As configured (No deprecation)

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/uc_system/unified/communications/system/Compatibility/TLS/TLS1-3-Compatibility-Matrix.html

Global Certifications - Translating to better security posture for all customers

Roadmap
Subject to
Change





✓ 15 SU2

Supported Release
UCM, IM&P, CUC, CER – 15 SU2
Expressway – 15 SU2
CUBE: 17.15.1



Certificate Authorizing Members


Certificate Consuming Members

Planned: H2CY25

UCM, IM&P, CUC, CER – 15 SU3
Expressway – 15.3
CUBE: 17.18

CiscoSSL and Cryptographic Updates

E911 – New Meraki Switch support for Cisco Emergency Responder

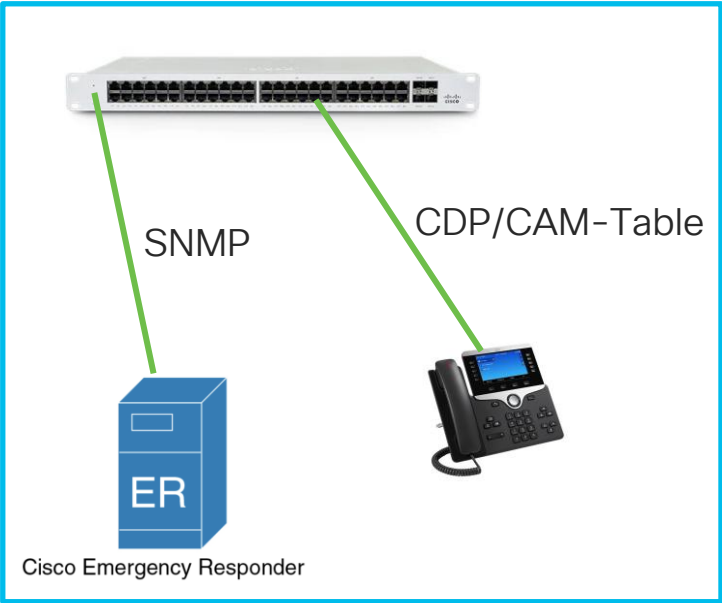

Switch Port Tracking:

CER can track phones and endpoints within the enterprise down to the switchport.

Individual Cisco switch models need to be supported in CER as we test that the switch SNMP is correctly parsed by CER.

The following new Cisco Meraki models have been added to CER:

MS130 series –	MS130-8
	MS130-8P
	MS130-8P-I
	MS130-8X
	MS130-12X
	MS130-24
	MS130-24P
	MS130-24X
	MS130-48
	MS130-48P
	MS130-48X


C9300-M series –	C9300-24T-M (Previously supported)
	C9300-24P-M
	C9300-24U-M
	C9300-48P-M
	C9300-48U-M

Release: CER 15SU2

Please refer to the [CER release notes](#) for a full list of supported switch models

IPv6 only support on CUCM

Current

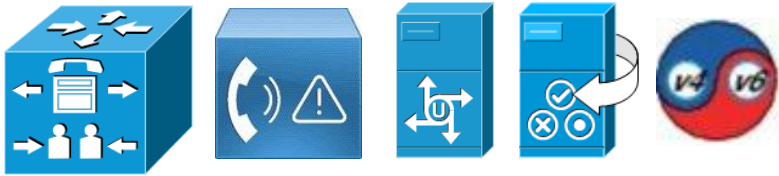

Problem Statement

- IPv4 address exhaustion
- Federal (OMB) Internal Mandates

Current Recommendation : 2

- CUCM, IMP, CER, CUC in Dual Stack
- Endpoints , SIP GW in IPv6 only

Network Infrastructure: IPv4 LDAP Dir Sync (IPv6 compliant), IPv6 NTP, IPv4 CDR / CMR/ Trace/ Backup server (IPv6 aware) , IPv4 Syslog server, IPv6 DNS, IPv6 DHCP


- CUCM / IM&P will be able to handle all phone services for IPv4 only endpoints as well

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/uc_system/IPv6/vtgs_b_ipv6-deployment-guide-for-cisco/vtgs_b_ipv6-deployment-guide-for-cisco_chapter_0100.html#concept_7ED92C5C806786DAB2E70D3360D1A93B

Future Direction (Not committed)

- CUCM, IMP, CER, CUC in IPv6 only
- Network Infrastructure : IPv6 LDAP Dir Sync (IPv6 compliant), IPv6 CDR / CMR/ Trace/ Backup server (IPv6 aware) , IPv6 Syslog server

Future

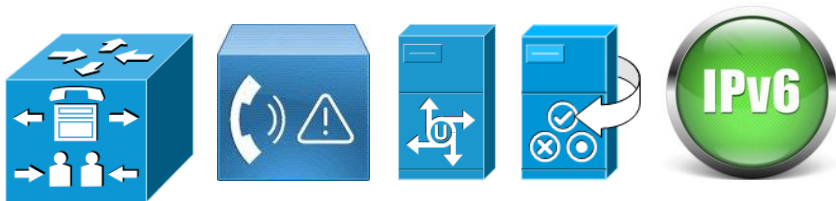

Optimize MTP Insertion in IPV4 / IPV6 Deployment

Available
Now

IPV4 Phone



SIP



CUCM

SIP Trunk with IPv4 Media Preference

Dual Stack




SME

Dual Stack




CUC



Not needed
from 15SU2

IPv6 Phone



Problem Statement

Unnecessary MTP allocation in scenario when

- UC Infra in dual stack mode, and combination of IPv6 and IPv4 Phones
- Dual stack SIP Trunk configured with IP Addressing Mode as IPv4 and IPv6.
- “IP Addressing Mode Preference for Media” configuration is set to default – IPv4

Benefits

- MTP will not be allocated in CUCM irrespective of Enterprise configuration
- Complete Dual Stack offer is send from SME to CUCM as received from CUC
- If IPv4 & IPv6 both m-lines received at CUCM then MTP is not allocated else legacy experience “where MTP is allocated” is provided

Key Features

- Supported Call flows
 - SIP trunk to SIP Line.
 - SIP Trunk to SIP Trunk.


Specific Platform releases

- UCM :15 SU2


Hardware Gateway based IPv6 Conference Bridge support in CUCM

Roadmap

Subject to
Change

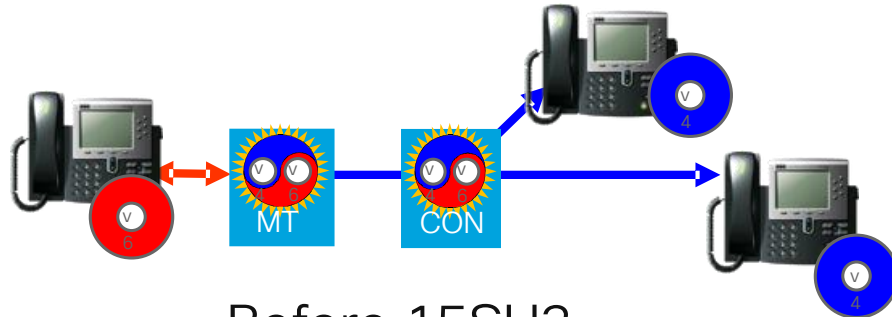

Before 15SU3

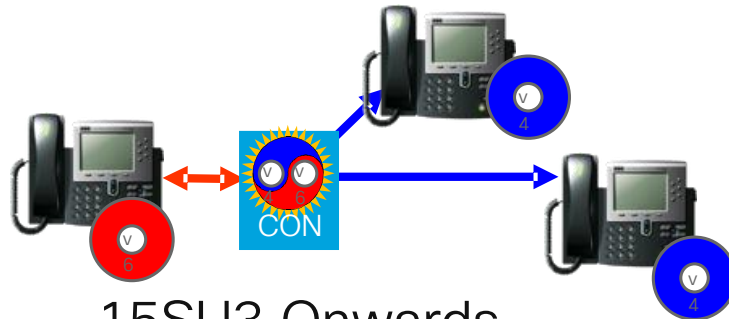

15SU3 Onwards

Problem Statement

MTP resources are allocated to conference IPv6 endpoints

Benefits

- Native IPv6 support of Conference Bridge avoiding the need of Dual Stack MTP resources
- Dual Stack (IPv4 and IPv6) registration of Conference Bridge in CUCM

Key Features

- IPv6 Secure conferencing

Minimum supported release

- Cisco UCM : 15 SU3

Uplifting User Experience

Cisco Desk Phone 9800 Series



Desk Phone 9841



Desk Phone 9851



Desk Phone 9861



Desk Phone 9871




Key Expansion Module
(KEM)

SECURE | MANAGEABLE | SUSTAINABLE
MORE THAN A PHONE. POWERED BY PHONEOS

UCM and Webex Calling

Action Button Feature Timeline

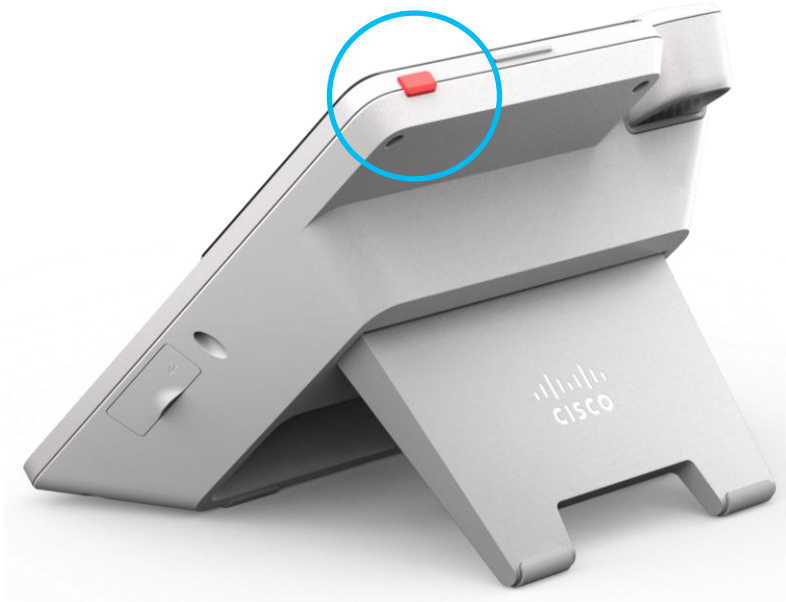

3.0 Firmware (CUCM & Cloud) – March 2024

- 9841 & 9851 – Action Button & Silent Emergency Call

3.1 Firmware (CUCM & Cloud) – July 2024

- 9861 & 9871 – Action Button & Silent Emergency Call

3.2 Firmware (CUCM & Cloud) – October 2024

- Custom Label
- Custom Service
- XML Application Support
- Multicast Paging with Visual Notifications: Webex Calling

3.3 Firmware (CUCM & Cloud) – January 2025

- Multi-Trigger
- HTTP POST


3.4 Firmware (CUCM & Cloud) – April 2025

- Single Trigger for Multiple Events
- Silent Emergency Call Retrieval

Action Button Multi-Trigger

9800 + 3.5 Firmware (CUCM & Cloud)

Trigger different actions by pressing Action Button a specific number of times.

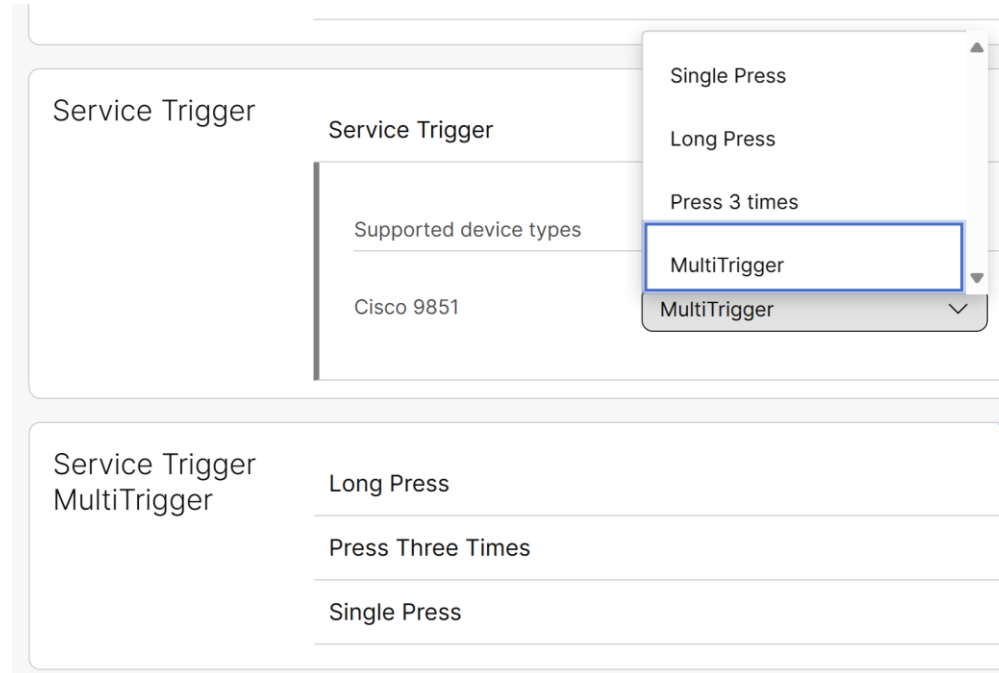

The screenshot shows the configuration page for the Action Button. A dropdown menu is open, showing options: Single Press, Long Press, Press 3 times, MultiTrigger (highlighted), and MultiTrigger (selected). Below the dropdown, the configuration table is visible:

Service Trigger	Service Trigger
Supported device types	Cisco 9851
Service Trigger MultiTrigger	Long Press
	Press Three Times
	Single Press

Examples:

Single press for internal IT support




Three presses for emergency call

Long press for service URL

Long Press

Triple Press



Single Press

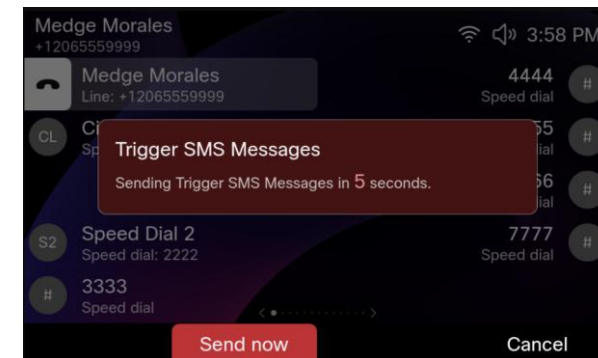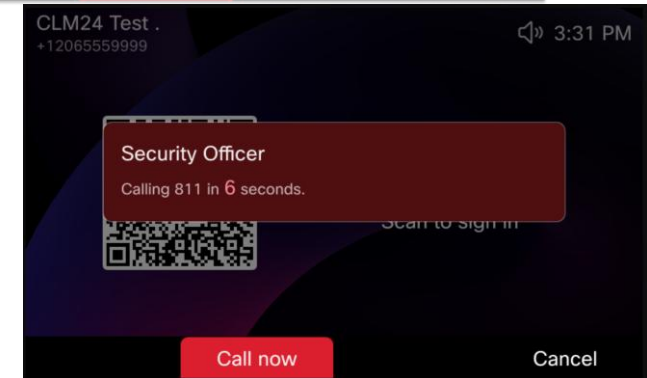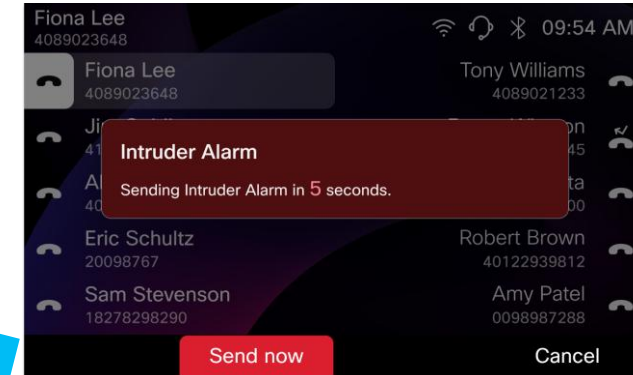

Thousand Eyes w/ 9800 Series Desk Phones

Troubleshoot faster with hop-by-hop network path provided by ThousandEyes.

- CUCM & WxC: 9861 & 9871

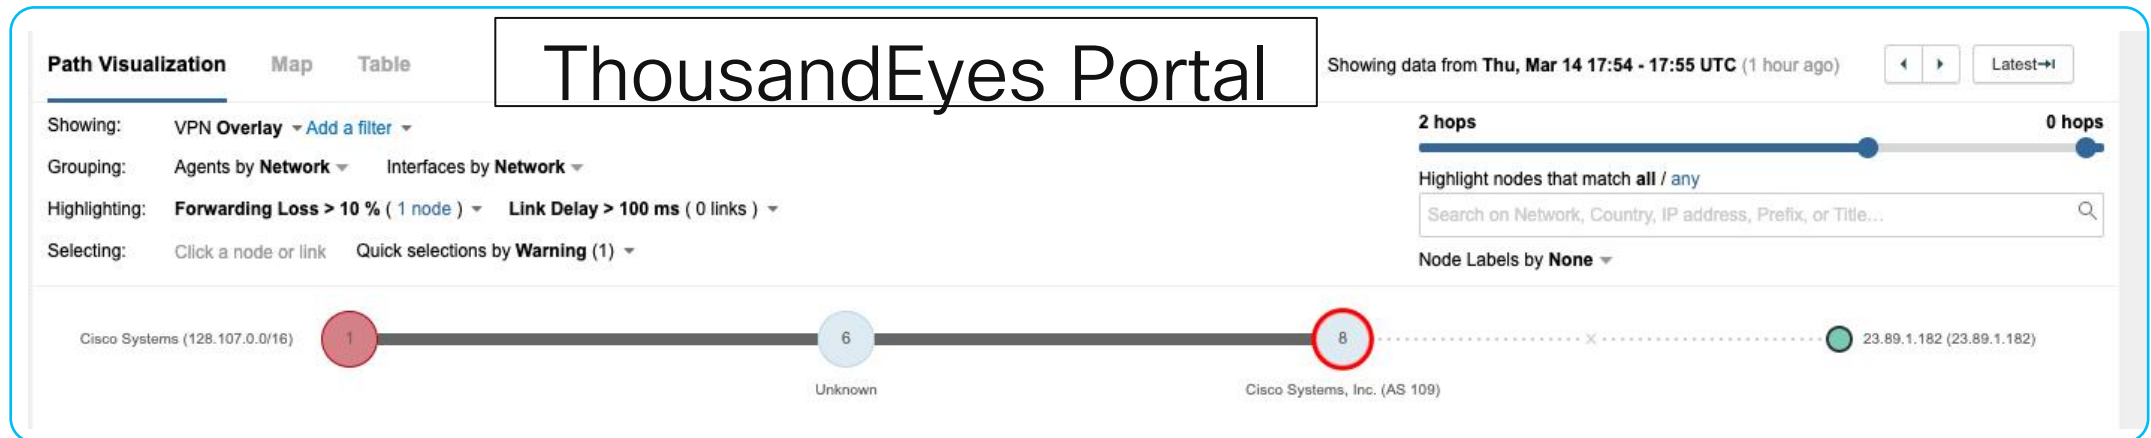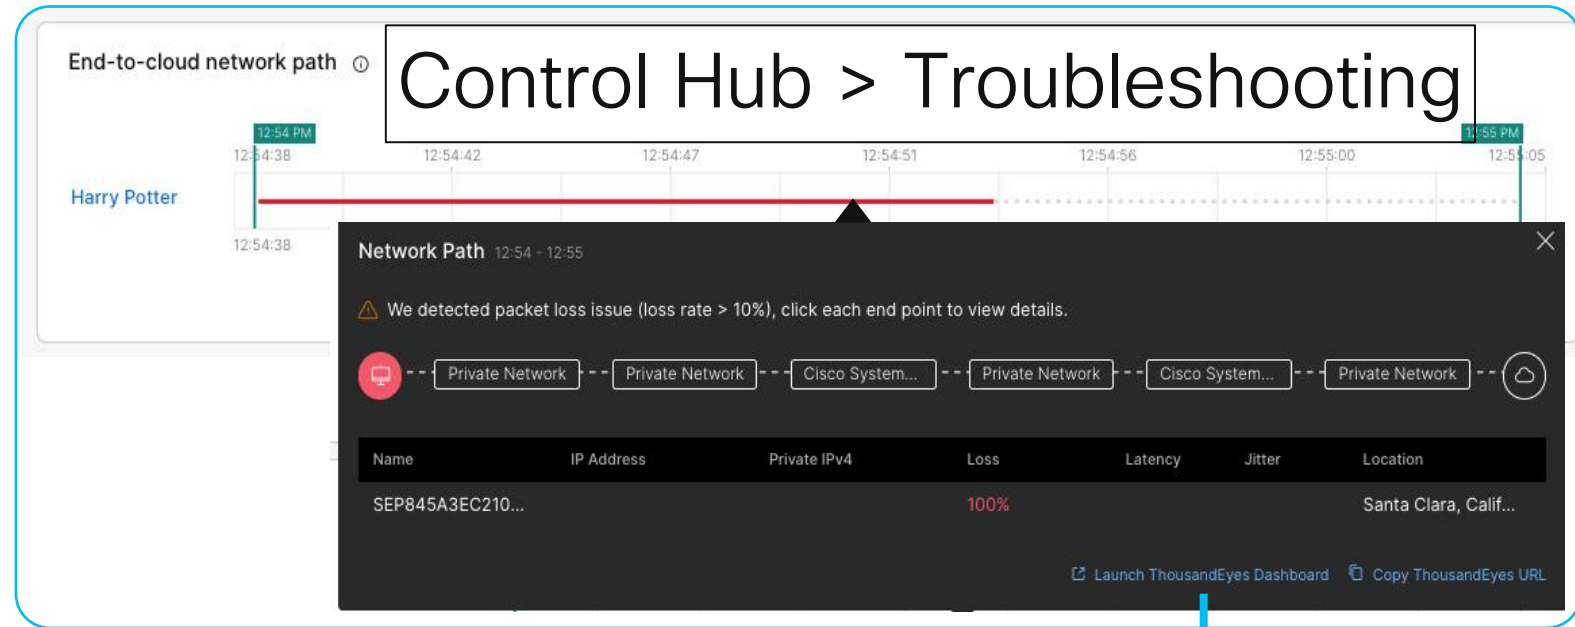

Save energy by turning on Deep Sleep

32.8 MWh

Saved per year by turning on deep sleep for outside office hours on 1,000 pcs of DP-9871

...equating to estimated annual savings of...

\$5,707

US**

€2,121

Germany*

€2,914

Italy*

€1,756

France*

* The EU electricity prices is the average prices by countries in Mar 2024, referring to [Statista Research](#)

** The US electricity price is the average price in Mar 2024, referring to [Bureau of Labor Statistics](#)

Jabber Release 15.0




Devices and OS

- Operation System
 - iOS 18 Support
 - Android 15 Support
 - macOS Sequoia
- New device support:
 - iPhone 16 Series



User Experience

- Admin control to disable call preservation
- Accessibility Improvements

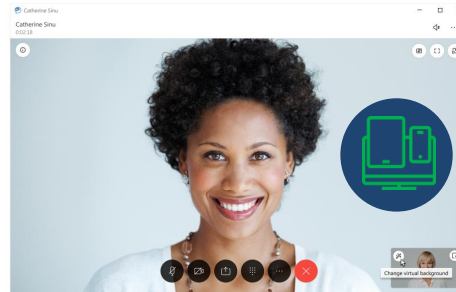

Security & Stability

- LDAP Channel Binding
- Exchange Extended Protection: Integration for the “Save Chats to Outlook”
- TLS 1.3
- FIPS 140-2

Admin control to disable call preservation

Available
Now

Call preservation in Jabber ensures that an active call remains connected even if there are temporary network interruptions.

However, if the end user leaves the office and the network switches from Wi-Fi to cellular, the call cannot continue and gets stuck in a call preservation state.


An admin can disable call preservation if the Wi-Fi quality is good, allowing the call to disconnect automatically when the network switches from Wi-Fi to cellular.

Specific Platform:

- Jabber for iOS and Android

Pre-requisite:

- Cisco Jabber 15.0.4

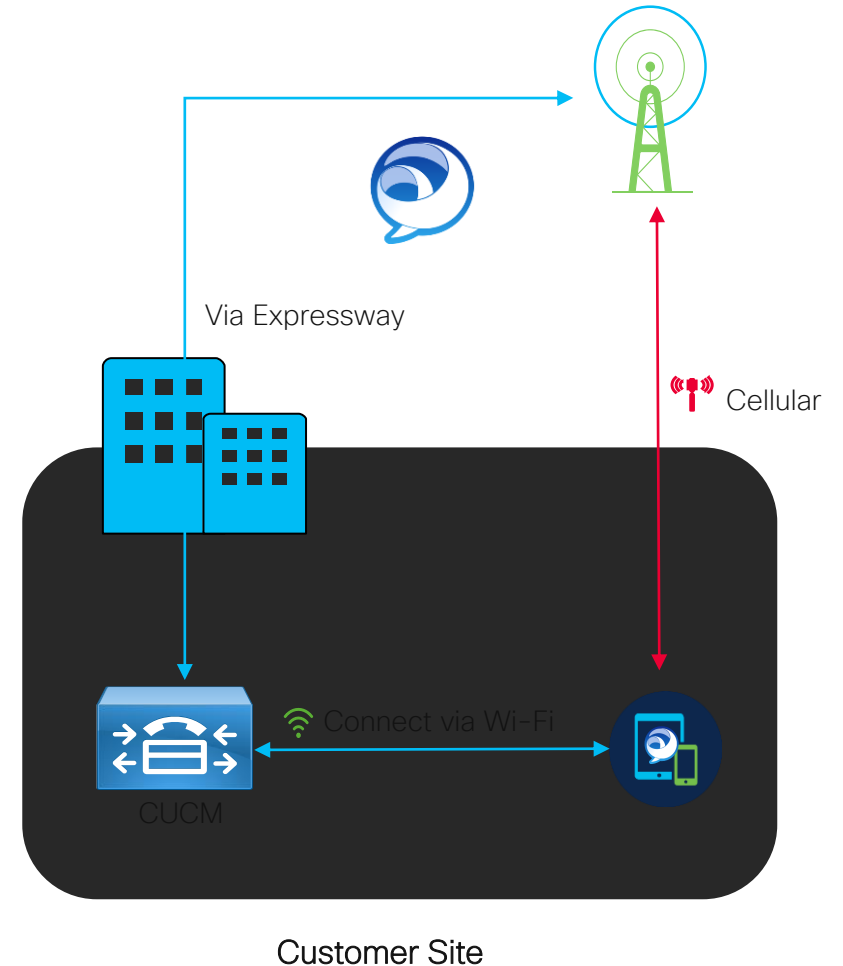

Jabber Release 15.1

April '25




Devices and OS

- Honeywell EDA57
- Samsung Xcover 7 Pro



User Experience

- Windows: Blur video background
- Option to disable DND presence
- Android: Option to disable FTE

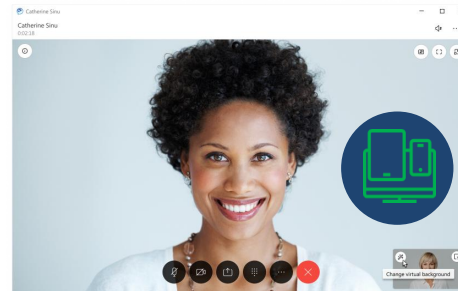

Security & Stability

- FIPS 140-3
- Common Criteria
- HTTP 2 support
- Quality Improvements

Blur video background

Available
Now

This feature enables users to blur their self-video background, ensuring that information in the background remains hidden from their peers.

By selecting the "Blur my video background" option in the Video tab of Settings in Cisco Jabber, users can protect their privacy effectively. Once set, this preference will remain for future calls.


Specific Platform:

- Jabber for Windows



Pre-requisite:

- Cisco Jabber 15.1

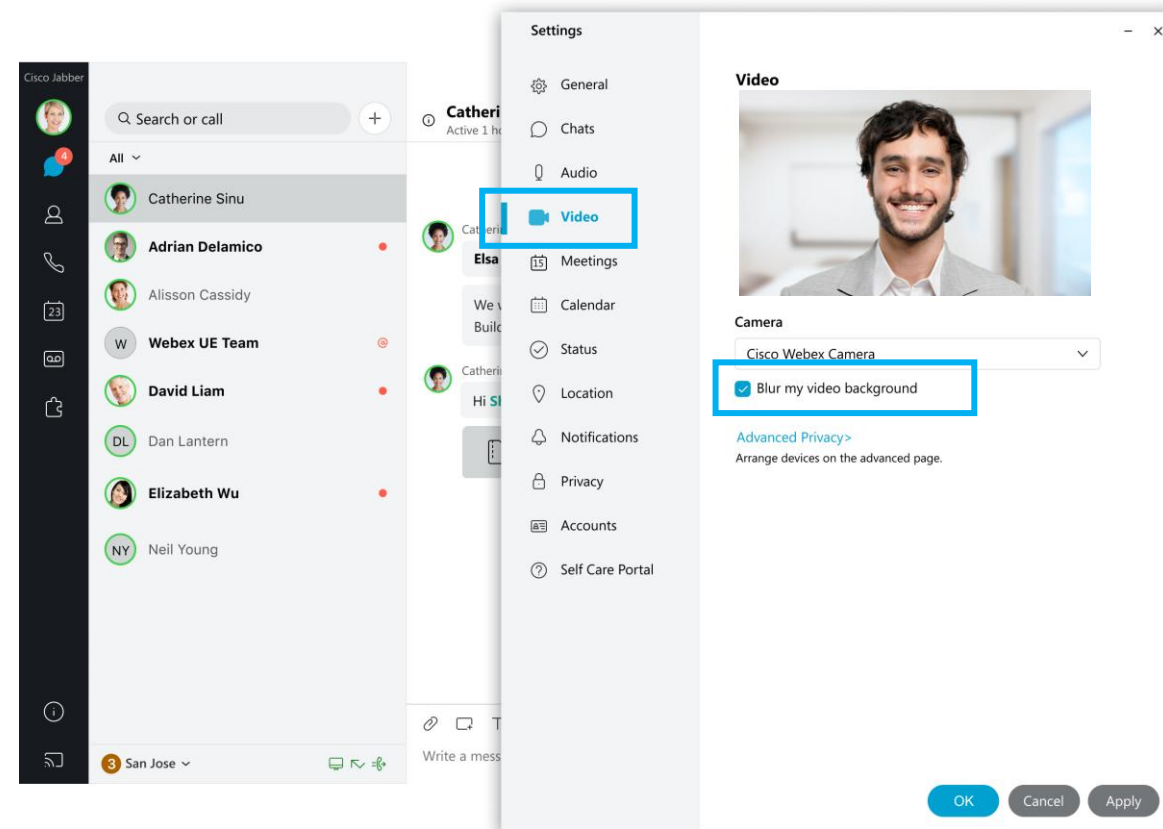

New OS and Devices support



Available
Now

Cisco Jabber can support the last released OS:

- Android 15
- iOS 18
- Mac OS 15.1

You need upgrade to Mac OS 15.1 or later to use Cisco Jabber.

New device support:

- Honeywell EDA57
- Samsung Xcover 7 Pro
- iPhone 16 Series

Pre-requisite:

- Cisco Jabber 15.1



Admin option to disable DND presence



Some end users set the Do Not Disturb (DND) presence in Jabber but forget to change it back, resulting in missed important calls or messages.


An admin has the option to disable the DND presence for users who rely on Jabber for critical business

Specific Platform:

- Jabber for Windows, Mac, iOS and Android

Pre-requisite:

- Cisco Jabber 15.1

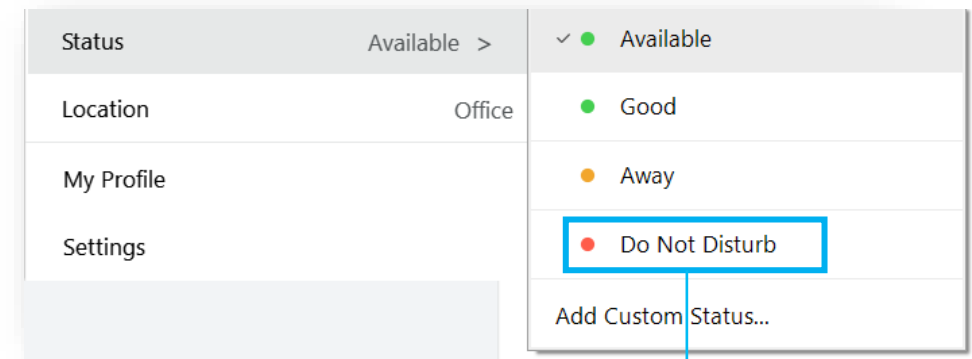

DND presence would not be shown

Accessibility

Continuous Accessibility enhancements including:

- Keyboard navigation
- Elements support for screen reader
- Focus order and visible
- Use of color

Compliance with WCAG 2.1 Level A and AA requirements.

UCM Supported releases (Continued phased work):

- UCM, IM&P, CUC, CER – 15 SU2+
- Expressway – 15.3+

Jabber Support:

- Jabber for Windows, Mac, Android, iOS
- Cisco Jabber 15.0+




iOS Local Push Connectivity for calls (LPNS)

Available
Now

New

Industry first and only solution

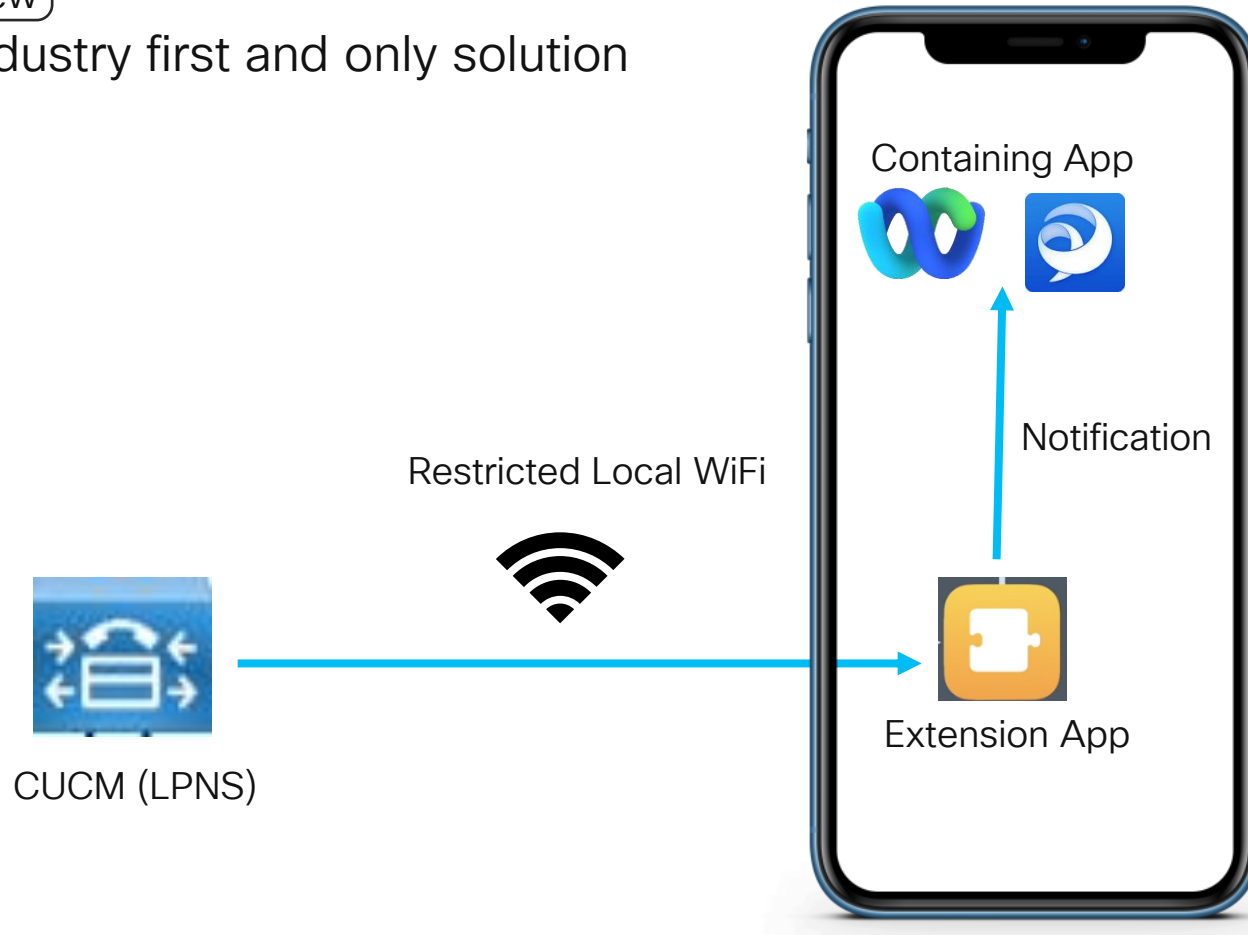

Benefits

- **Reliable & Secure** way to notify Webex App / Jabber users on iOS devices of incoming VoIP call when iOS devices operate in a WiFi constrained network when there is **no internet connection** and doesn't have access to APNs

Key Features


- To the user, LPNS and APNS notifications will be identical
- Mission critical / Time critical Local notifications get delivered when App is suspended and running in background
- Persistent connectivity to LPNS service

Supported Releases:


- Cisco UCM: 15, 14SU3 onwards
- Webex App 43.6
- Jabber: 14.2

Further Jabber Innovation


Roadmap
Subject to
Change

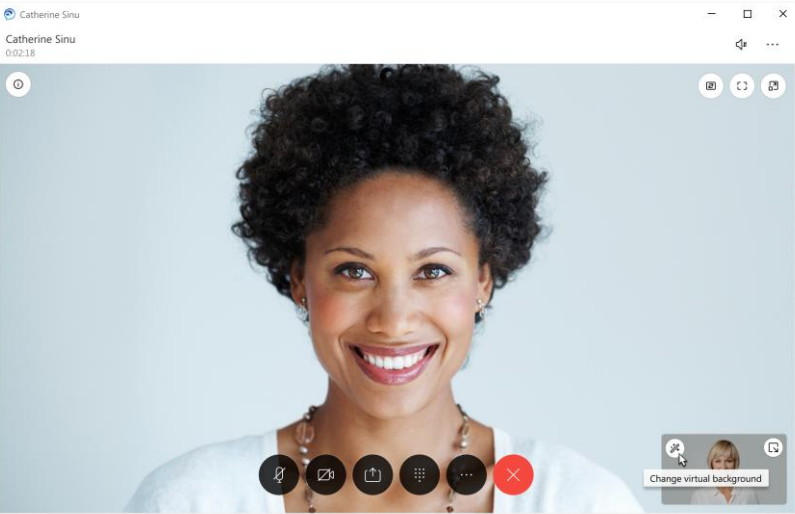

Virtual video background

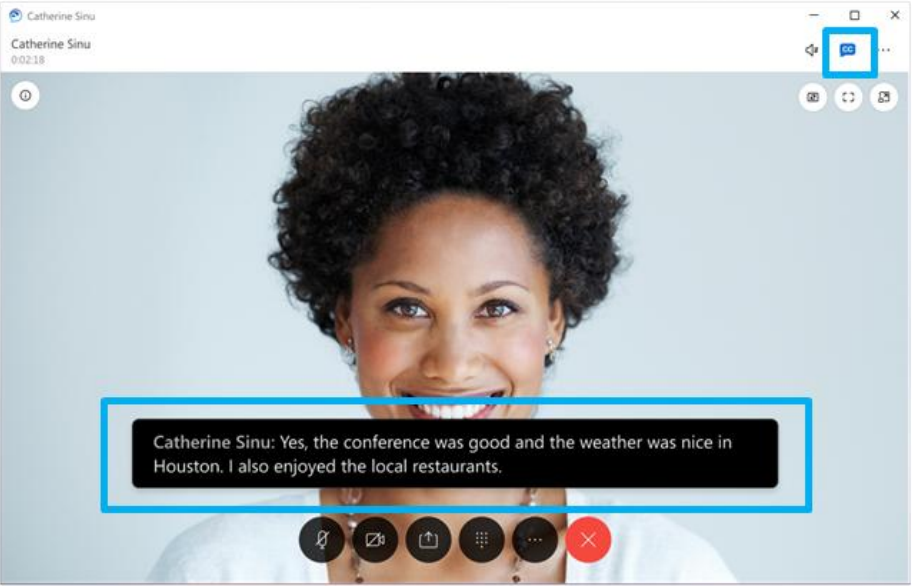



Closed Captions

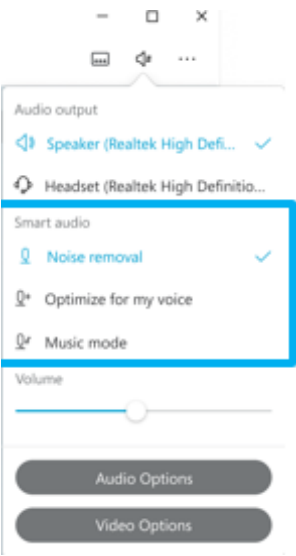

Noise Removal

Cisco Meeting Server (CMS)

A comprehensive meetings portfolio

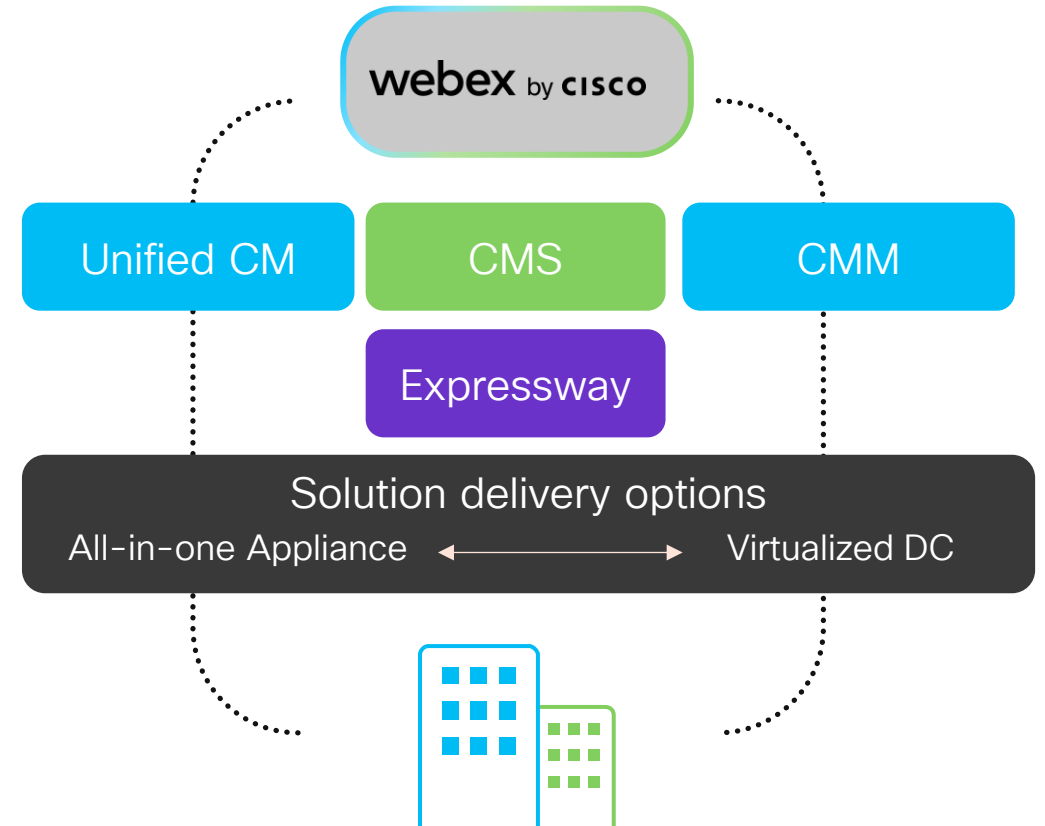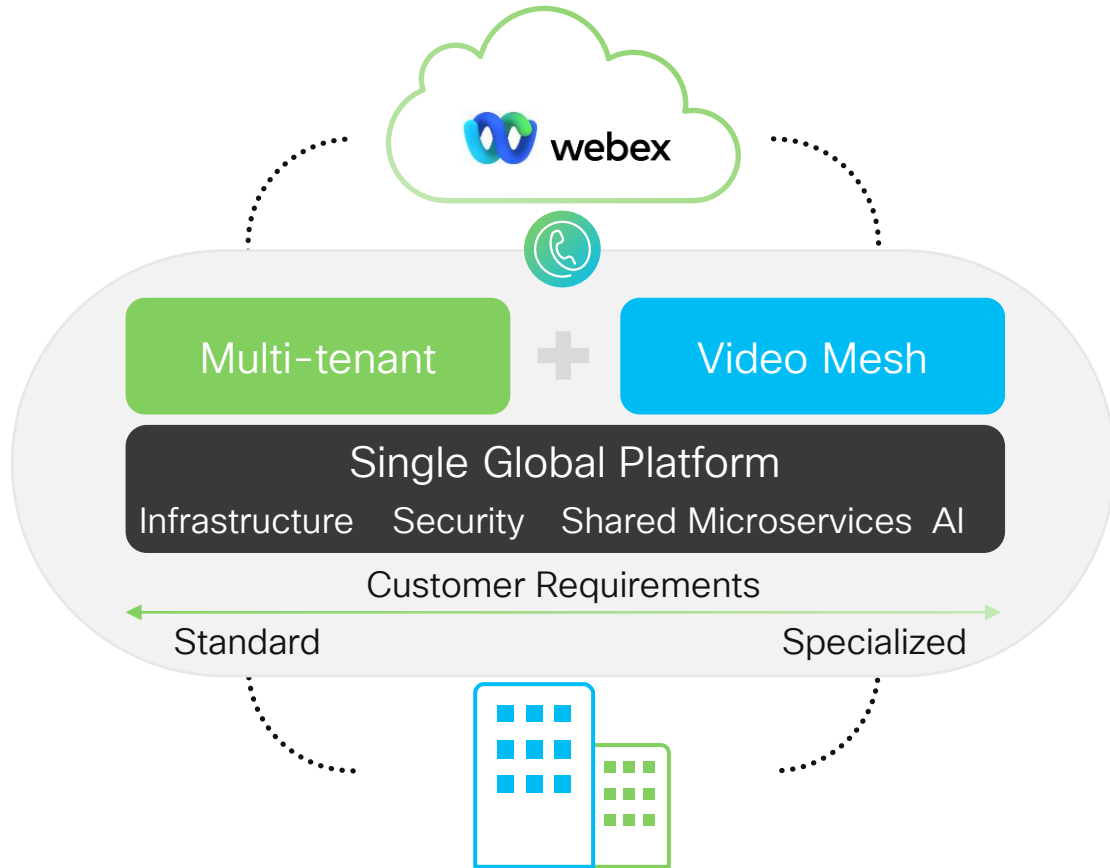

Release 3.12

GA: October 2025

Meeting Experience (CMS web app)



Engaging Experience

- Rename participants (web app)
- Ability to save chats
- User Identification on web app (configuration parameter)
- Link join for NonMemberAccess coSpace
- Web app Redesign (Momentum updates)

Core & Interoperability

- CMS-IMP Connection Resiliency
- creation Time for coSpaces
- Secure storage for CMS 1K/VM

Meeting Management




Management

- Pane placement Usability Enhancements
- Participant gain adjustment


CMS Product Focus

Improve User Experience and Meeting Quality

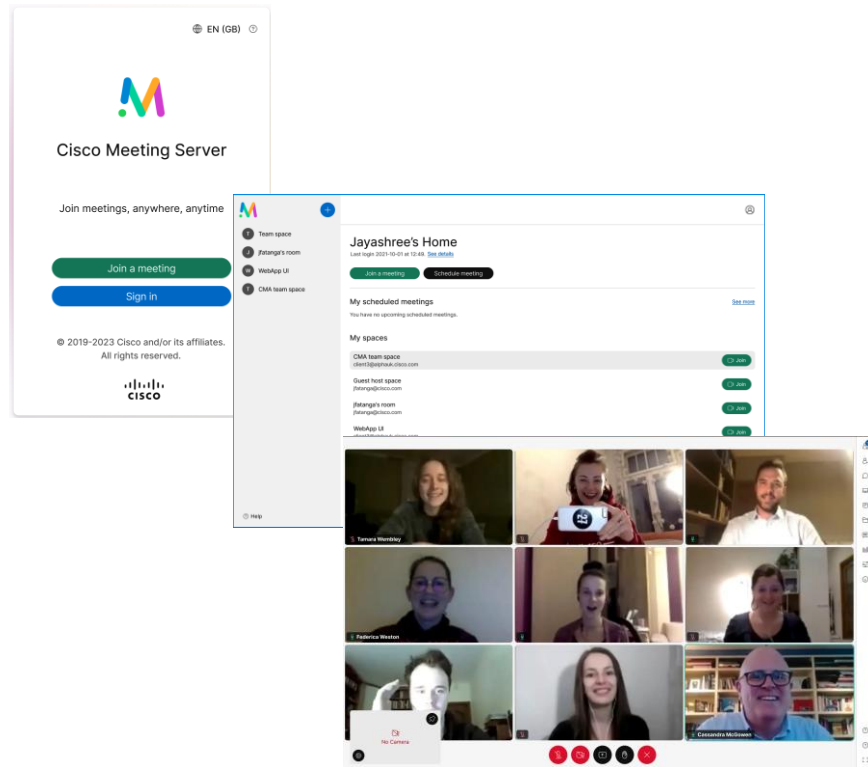


A Fresh perspective

- Refreshed UX
- Support for Audio participants as tiles
- Better Media resiliency w/ Support for TWCC and Enhanced MARI

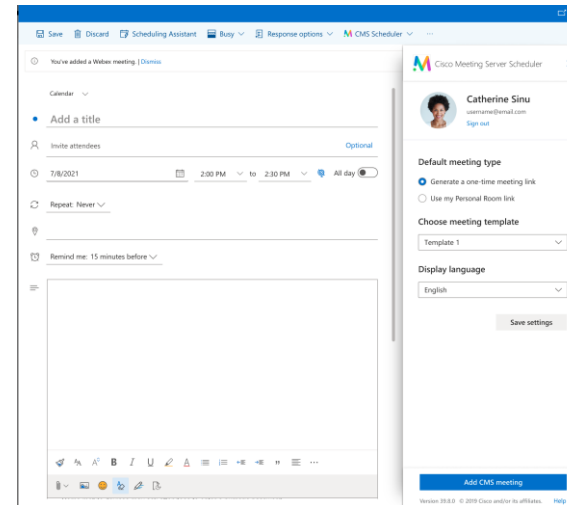

More features for web app

- Outlook Add-In
- Breakout Rooms
- VDI Support

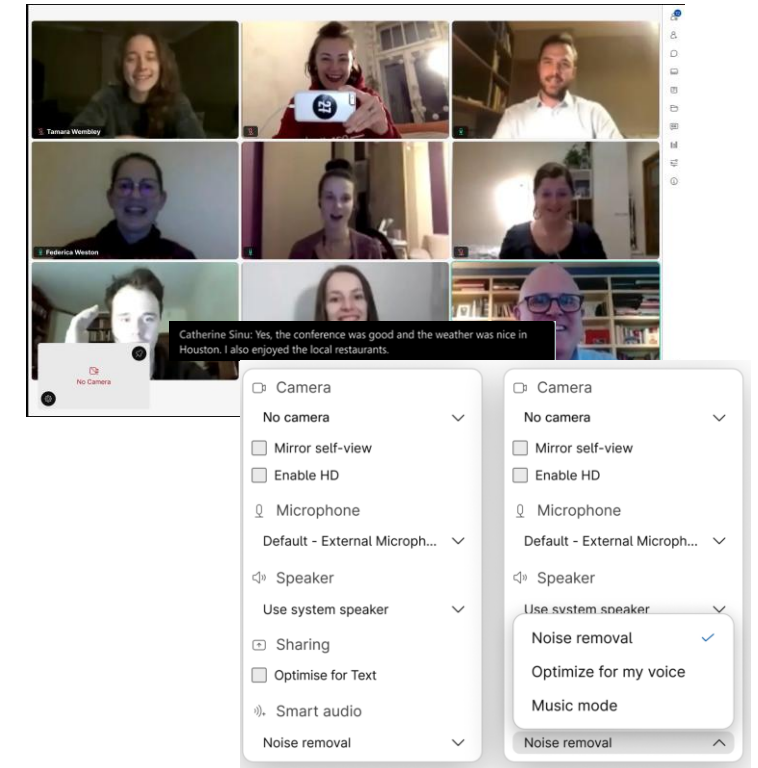


AI Powered

- Automated Closed captions
- Noise Removal (Client and Server side)
- Improved background blur

CMS Hardware

Simplify Architecture and deployments


Roadmap
Subject to Change

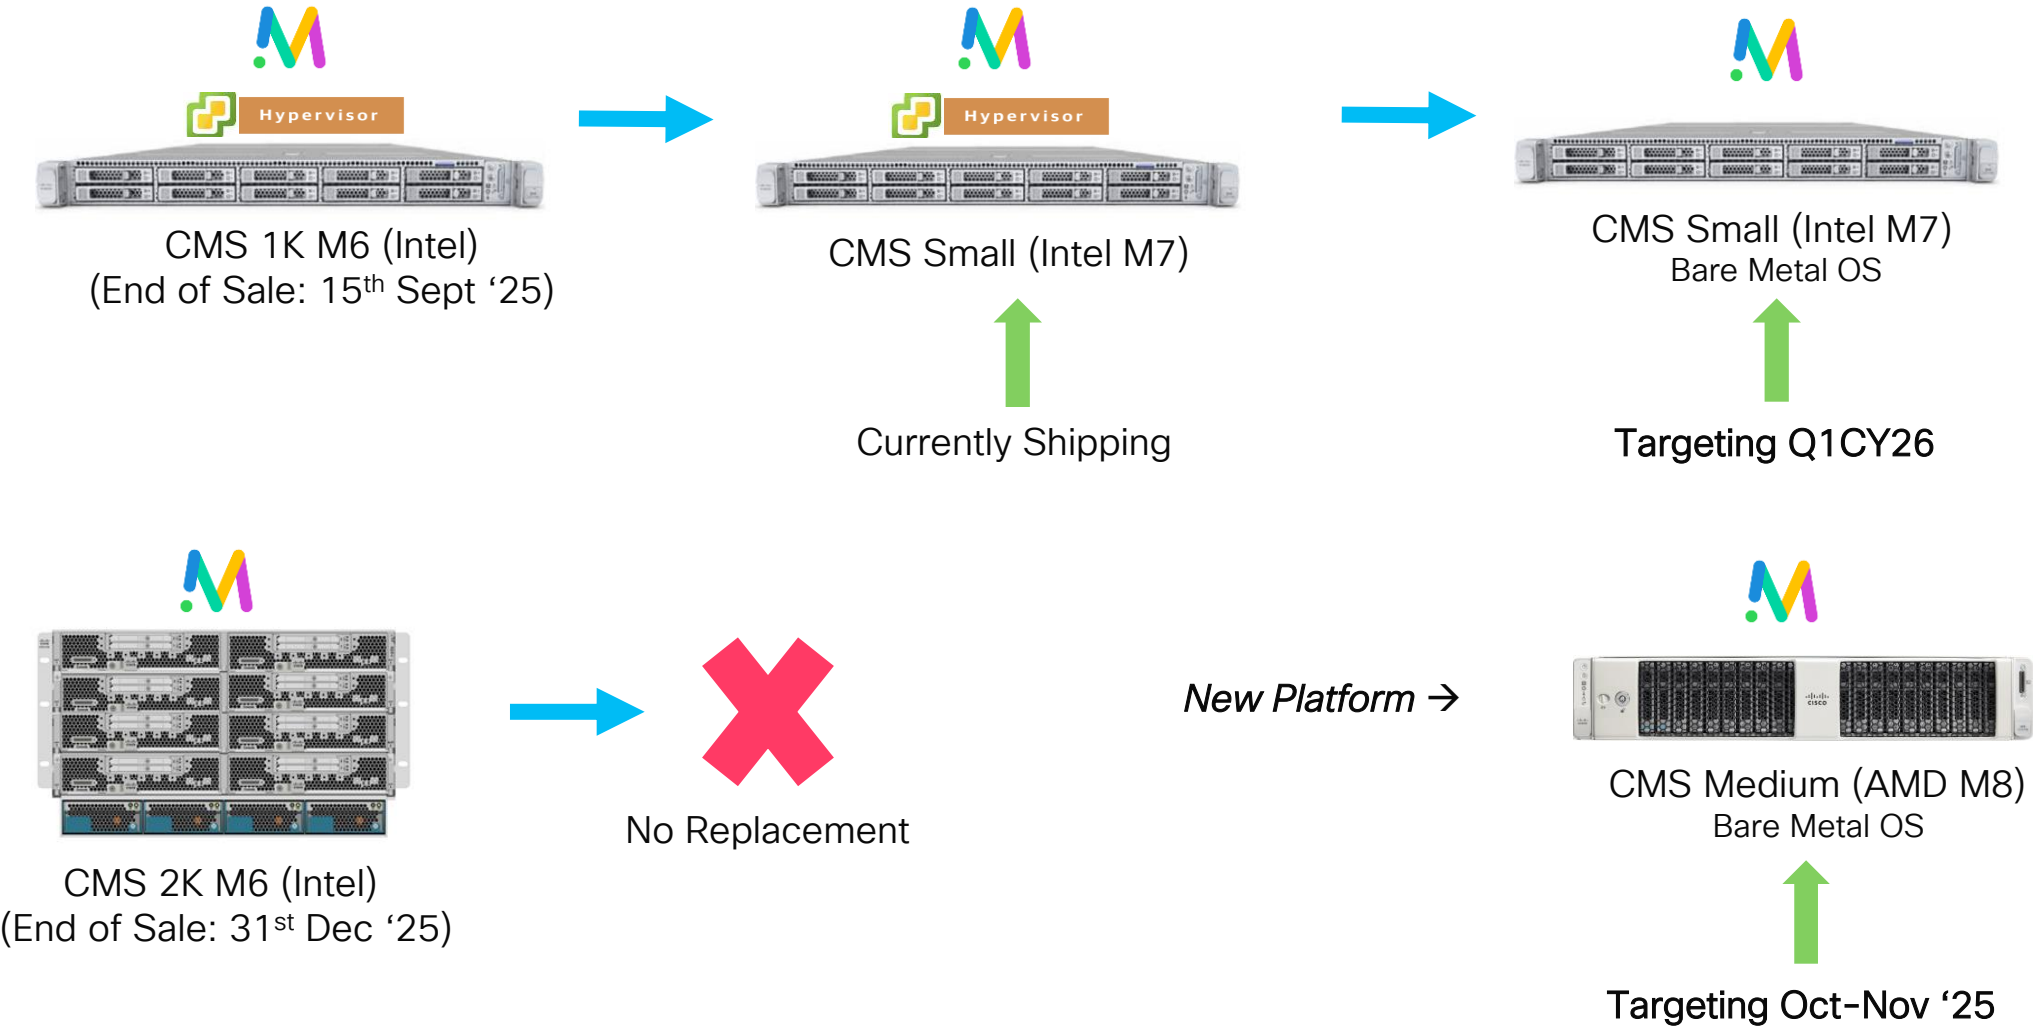

CMS Hypervisor

Support more...

Roadmap
Subject to
Change

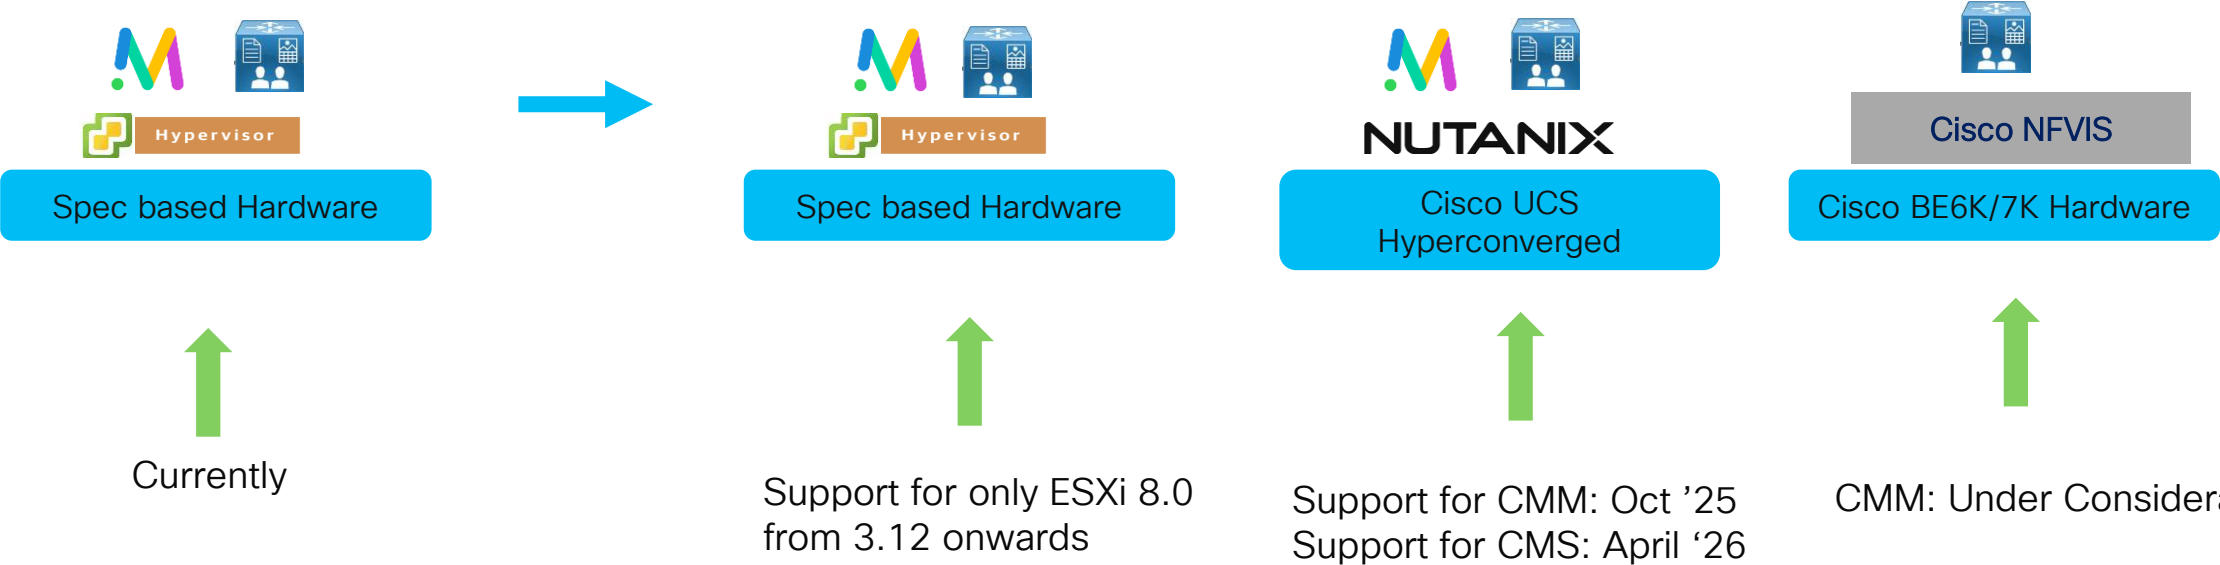


Enabling Hybrid

Drive Higher Value from Cloud for your On-Prem deployment

Webex Cloud-Connected UC & Hybrid Services

CCUC

Hybrid Services

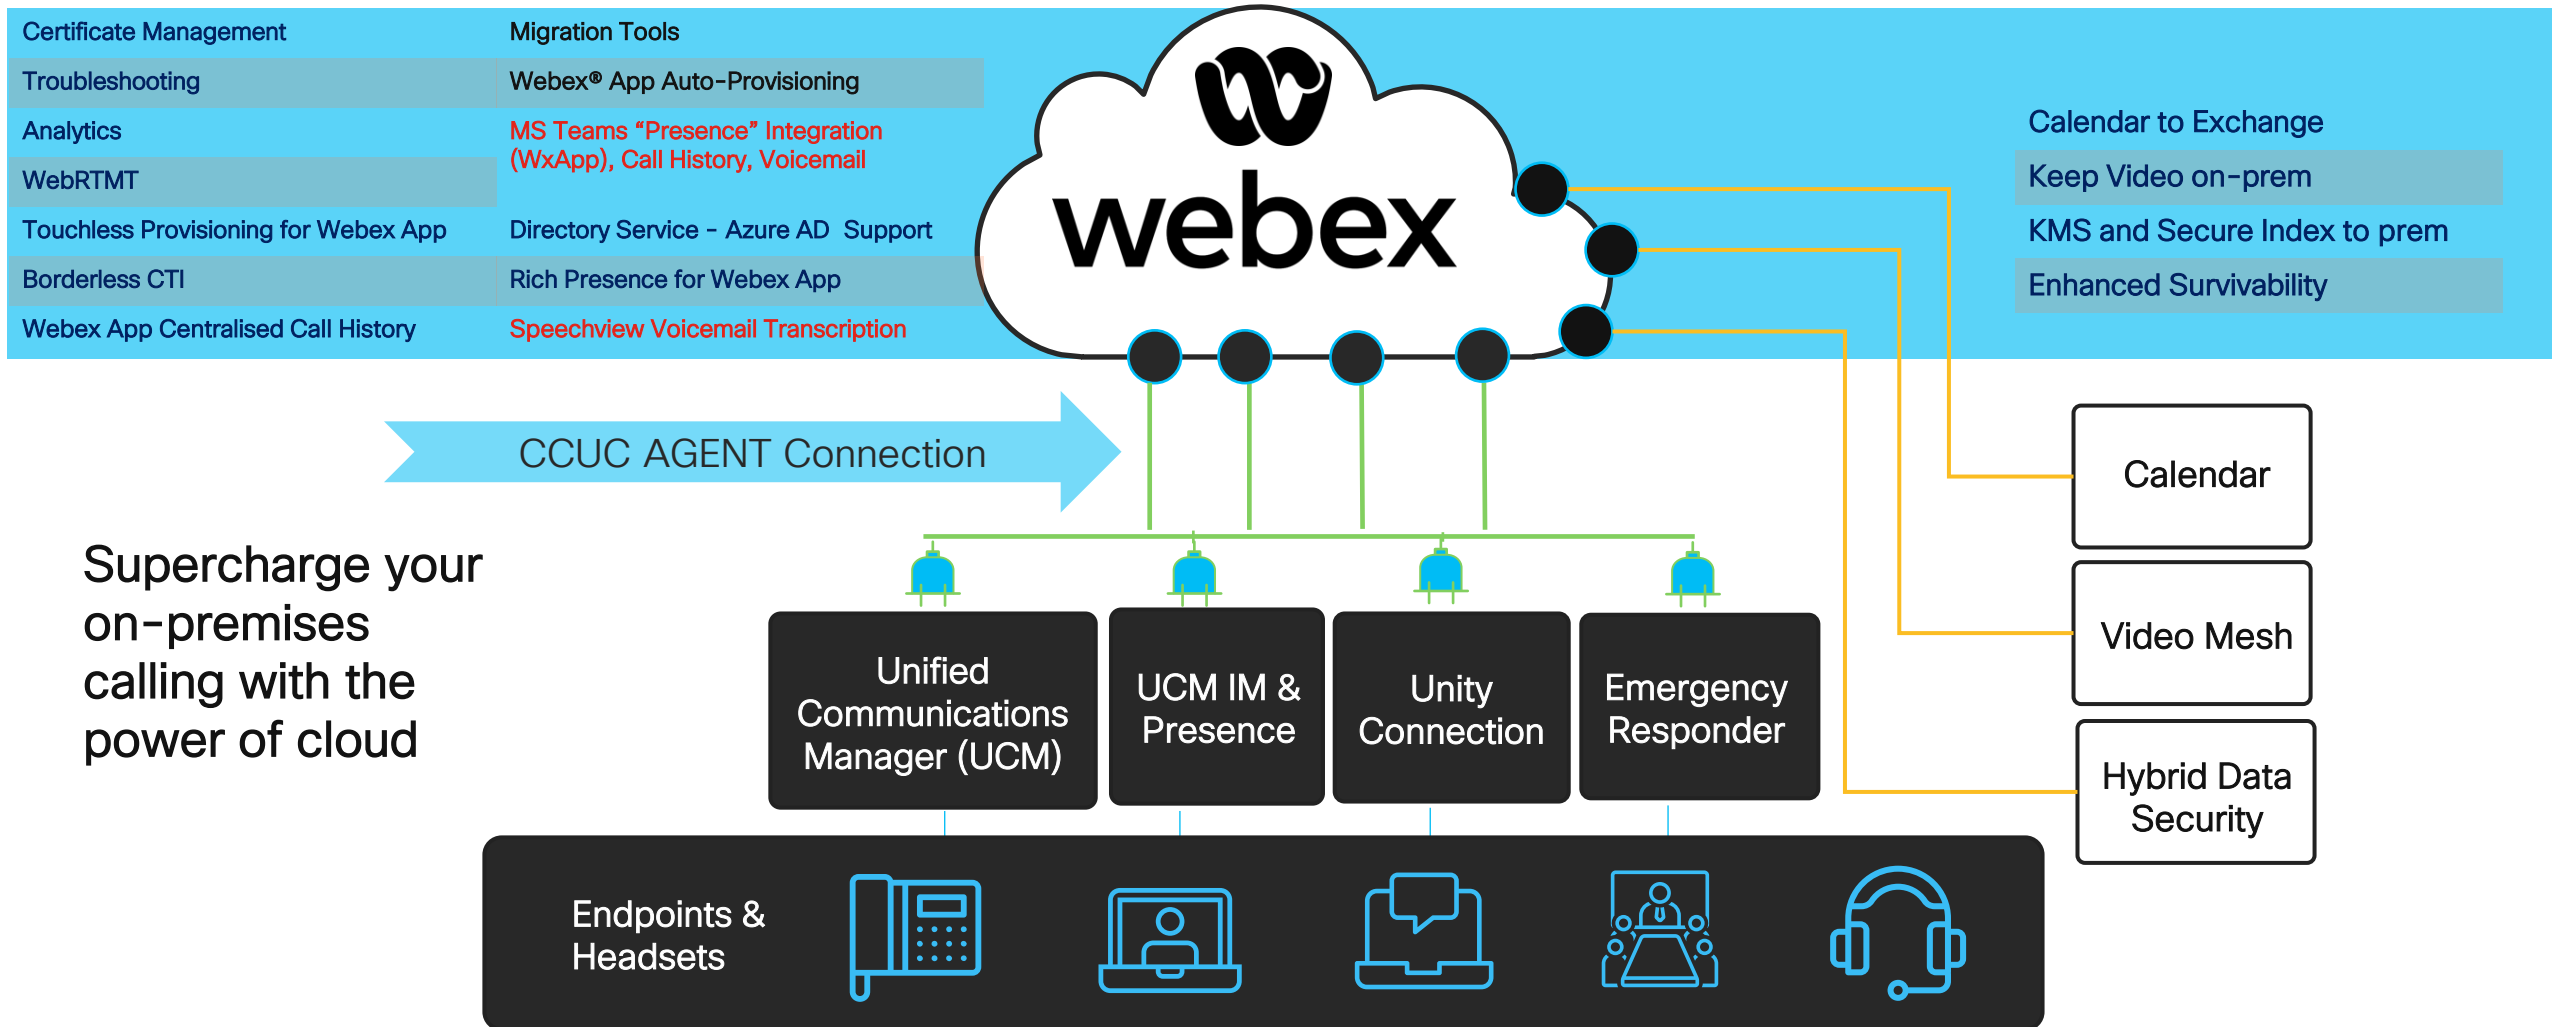


Native Webex Voicemail Transcription (Speech View Update)

Available
Now

SpeechView enables voicemail and its transcript to be sent in email.

The 3rd party service used for transcription has stopped working from 6-Jan-2025.

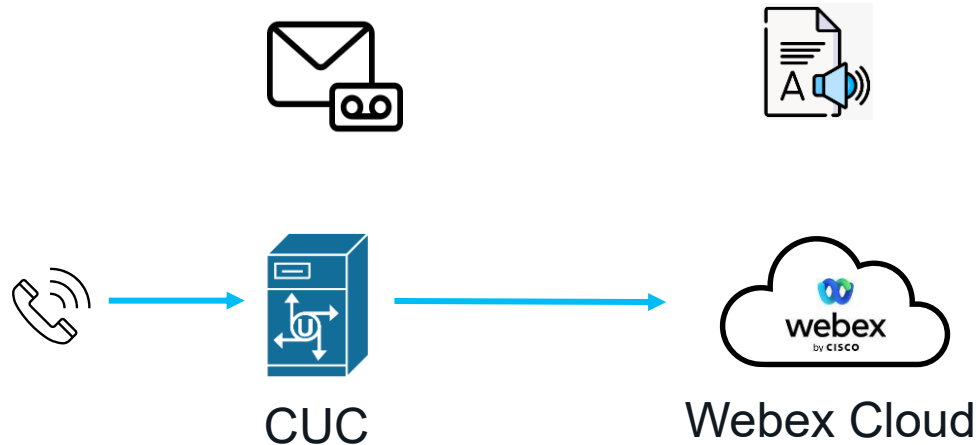

- Migration of SpeechView transcription service to Webex in-house transcription.
- Reduce the complexity of configuring SMTP and leverage the capabilities of Webex.


Supported Release: CUC 14 SU4 & CUC 15 SU2

Pre-requisite:

CUC onboarded to Webex Cloud-Connected UC (CCUC)

Caveats: Transcription available for English and specific foreign languages.

Calling features you need, available anywhere

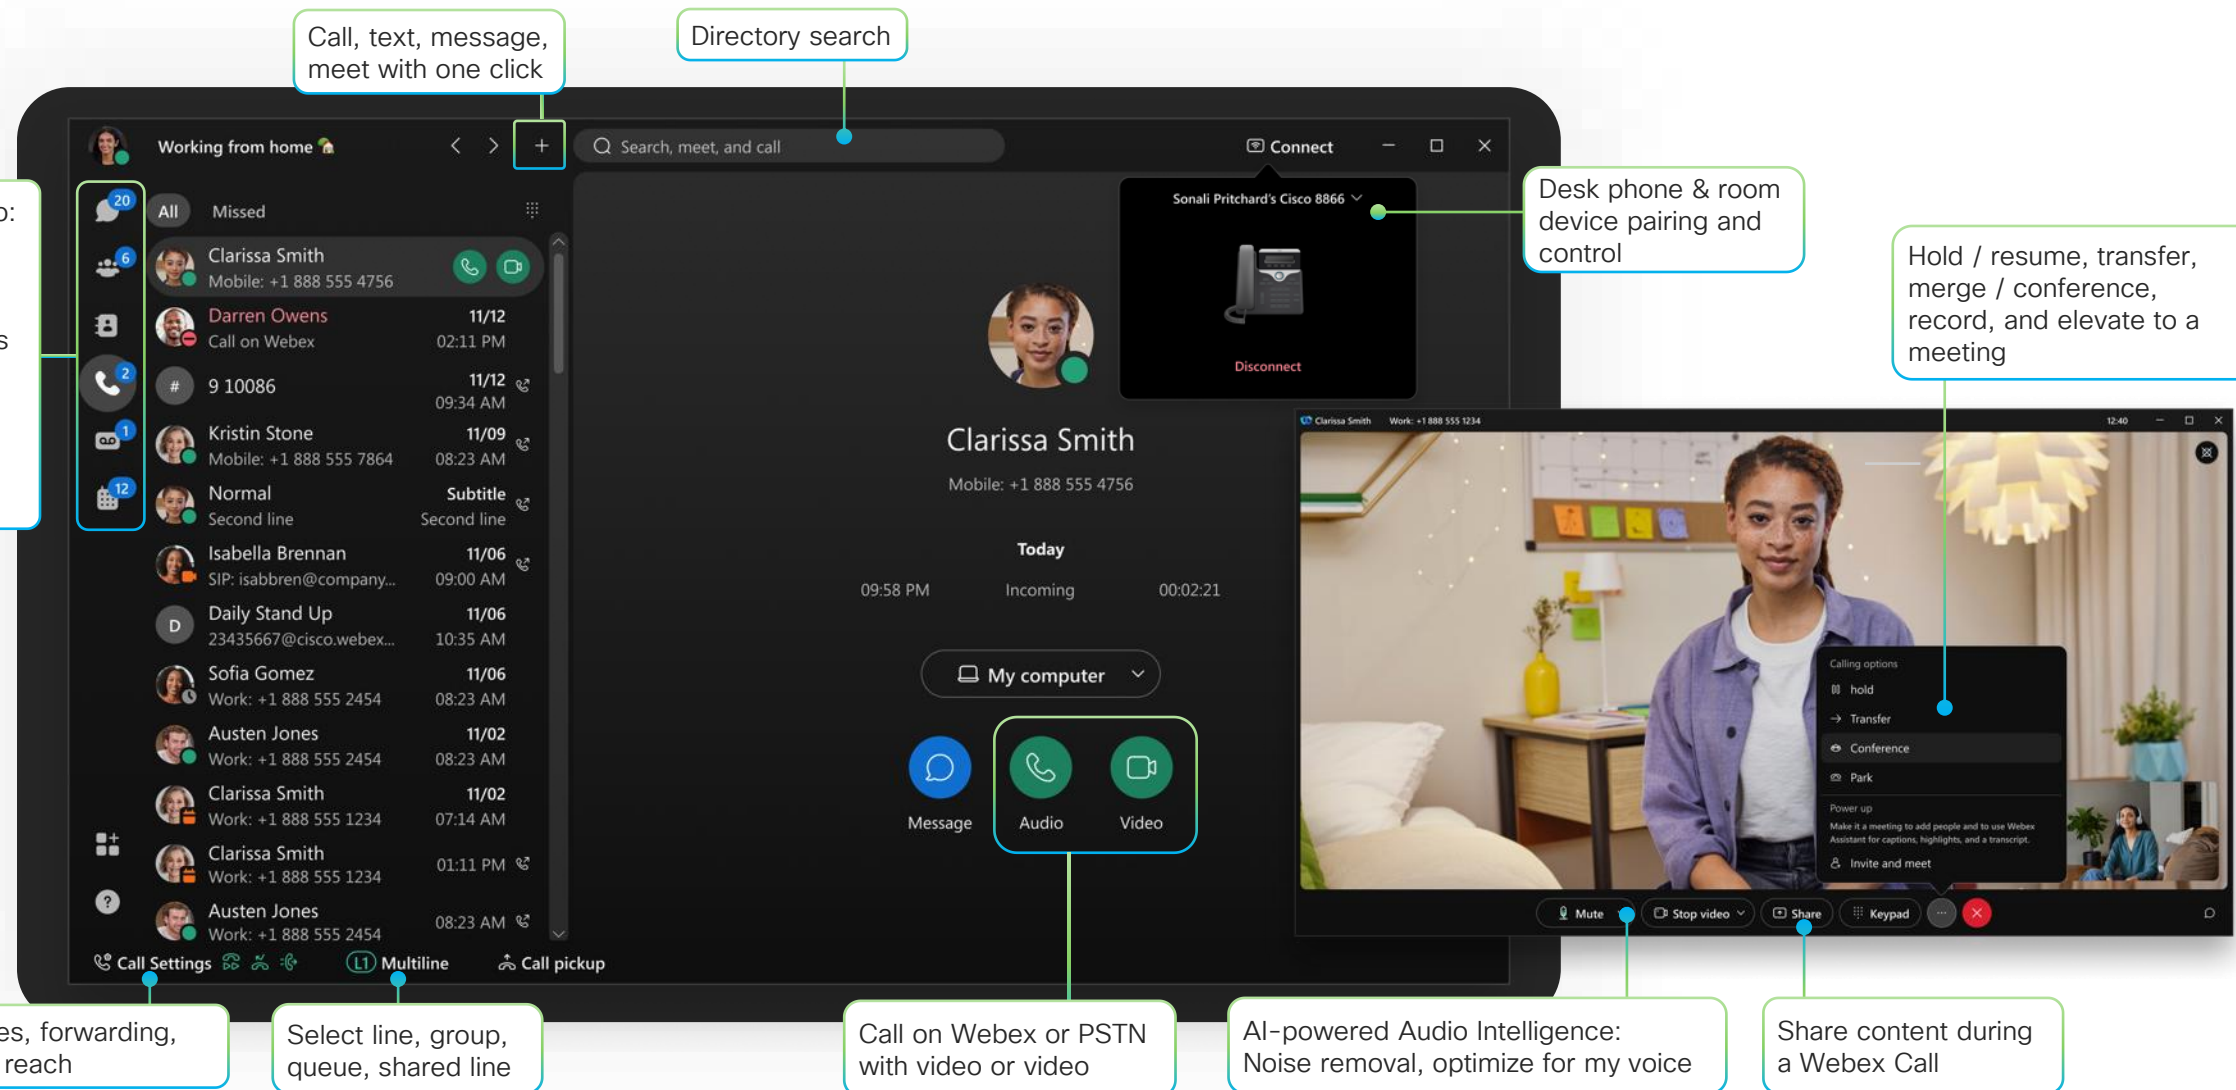

webex



Calling Feature parity

Webex App reached
feature parity with
Cisco Jabber for
knowledge workers

		Webex App (Unified CM)	Cisco Jabber
Messaging	IM-only Share	✓	✓
	Remote Desktop Control (Mouse & Keyboard)	✓	✓
Device	Desk-phone Control	✓	✓
	HD Video & Audio Softphone	✓	✓
	Contacts (Corporate, Personal, Local Search)	✓	✓
	In-a-call Presence, DND	✓	✓
	Hold/Resume, Consultative Transfer, Conference	✓	✓
	Call History	✓	✓
	Voicemail (Visual & MWI & Call VM)	✓	✓
	Hunt Group	✓	✓
	Call Pickup	✓	✓
	Call Park	✓	✓
Calling	Extend & Connect & Dial-via Office	✓	✓
	In-Call Sharing	✓	✓
	Call Recording	✓	✓
	Multi-Line	✓	✓
	FECC (Far End Camera Control)	✓	✓
	ICE Media Optimization	✓	✓
	3rd Party Headset Control	✓	✓
	CTI-Control by Other Application	✓	✓
	Enterprise Contact Center (UCCE/X) Support	✓	✓
	Virtual Desktop Integration (VDI)	✓	✓

Summary of features in Webex App

Not available in Jabber

Calling

- Blur, virtual & custom background
- Noise removal and music mode
- Remote side (PSTN) noise removal
- HD-Voice – bandwidth Extension
- Calling Dock
- Seamless call handover between networks (Wi-Fi, LTE/4G)
- B2B2C app-to-app calling with annotation and whiteboard
- Seamless Move call to meeting
- E911 RedSky native support
- App share with desk phone control
- Desk phone control over MRA
- Common call history cross devices
- Multi-line experience on mobile
- Webex AI codec(MT)
- Closed Caption and transcription(MT)
- AI Assistant features – recorded summary, live & transfer summary, and many more to come(MT)
- Personal call recording(MT)
- Voicemail transcription(MT)
- Business texting(MT)

Admin/Deployment

- Analytics and monitoring with Webex control hub
- Centralized Cisco desk phone and headset management
- App auto update
- Webex for Linux
- Webex APIs and SDKs
- Webex Go Mobility(MT)

Device Integration


- Proximity pair with Joining Meeting and 1:1 calling
- Seamless move between device and Webex App
- Wireless share & whiteboard with cloud devices
- Hot Desking(MT)

Many more to come... !



Common Call History for UCM Calling

Available
Now

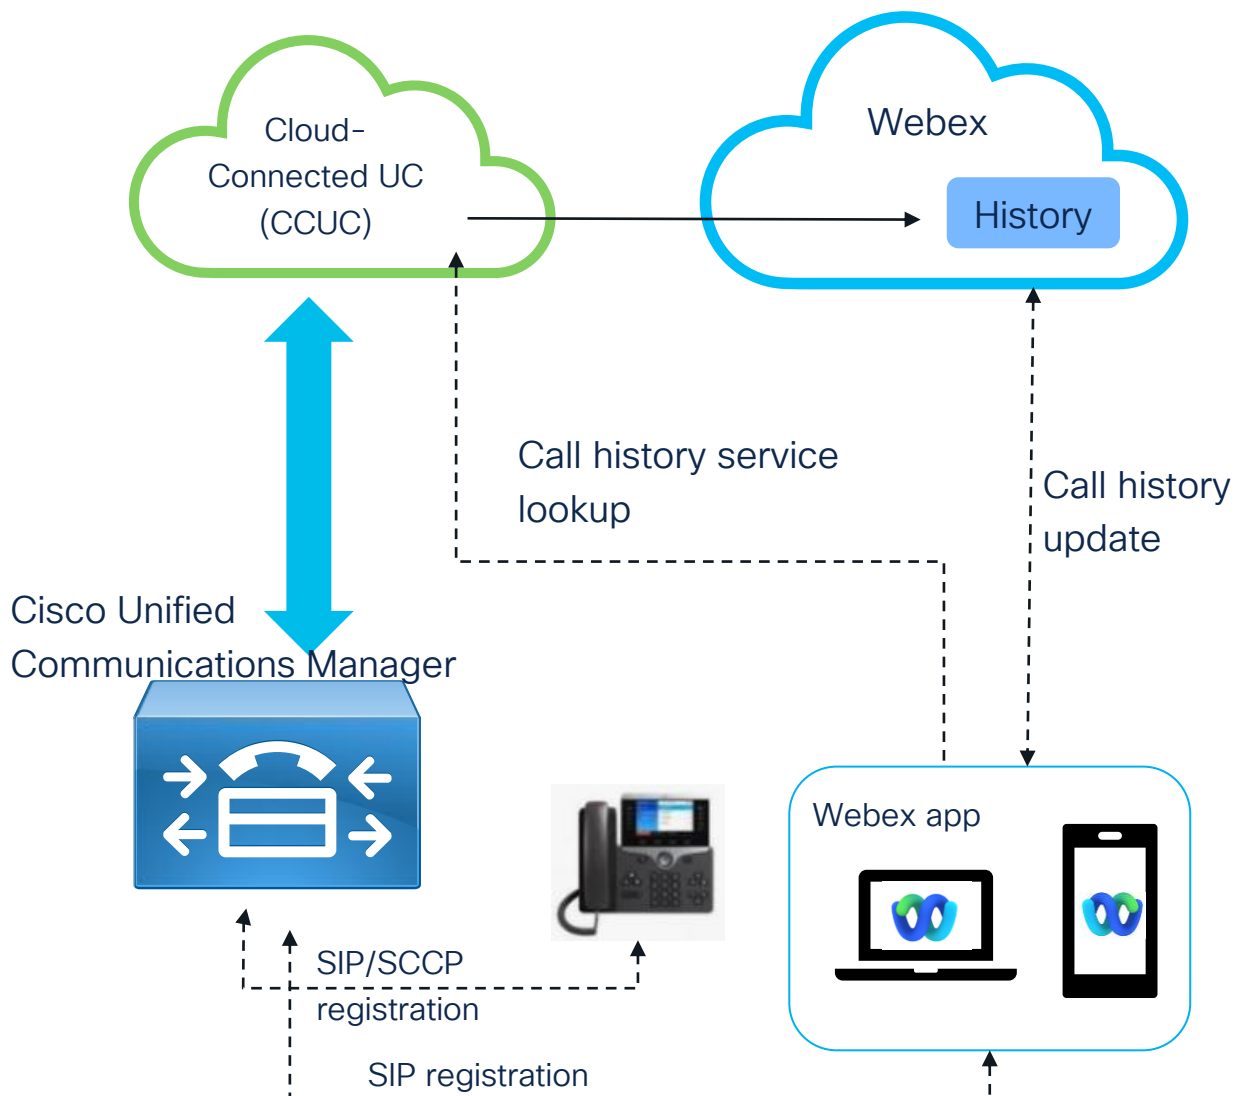

When users are not signed in Webex app calls placed/received on other devices are not seen. The result is inconsistency across the devices.

With this feature, users will get synchronized call history on Webex app registered to UCM.

IT admin can turn on required options through CCUC on Control Hub.

Specific Platform releases/dates:

Webex App on Desktop and mobile

Pre-requisite:

- Webex Cloud-Connected UC (CCUC)
- UCM 14 SU4 / 15 SU2
- Webex App 44.6



UCM Calling Multiline on Webex App mobile

Available
Now

Enables enterprise power users to handle multiple calls simultaneously, increasing efficiency and productivity

Key Features


- Enhanced User Experience
- Up to 8 lines supported
- Android , iOS devices (mobiles and tablet)

Caveats/Limitations on feature:

- Max 2 calls on the devices
- Basic mid-call functions for Executive / Admin shared line case
- Other mid-call functions & tablet will be delivered later, No CUCM update is needed

Pre-requisite:

- Webex App on mobile 44.12
- UCM :15 SU2

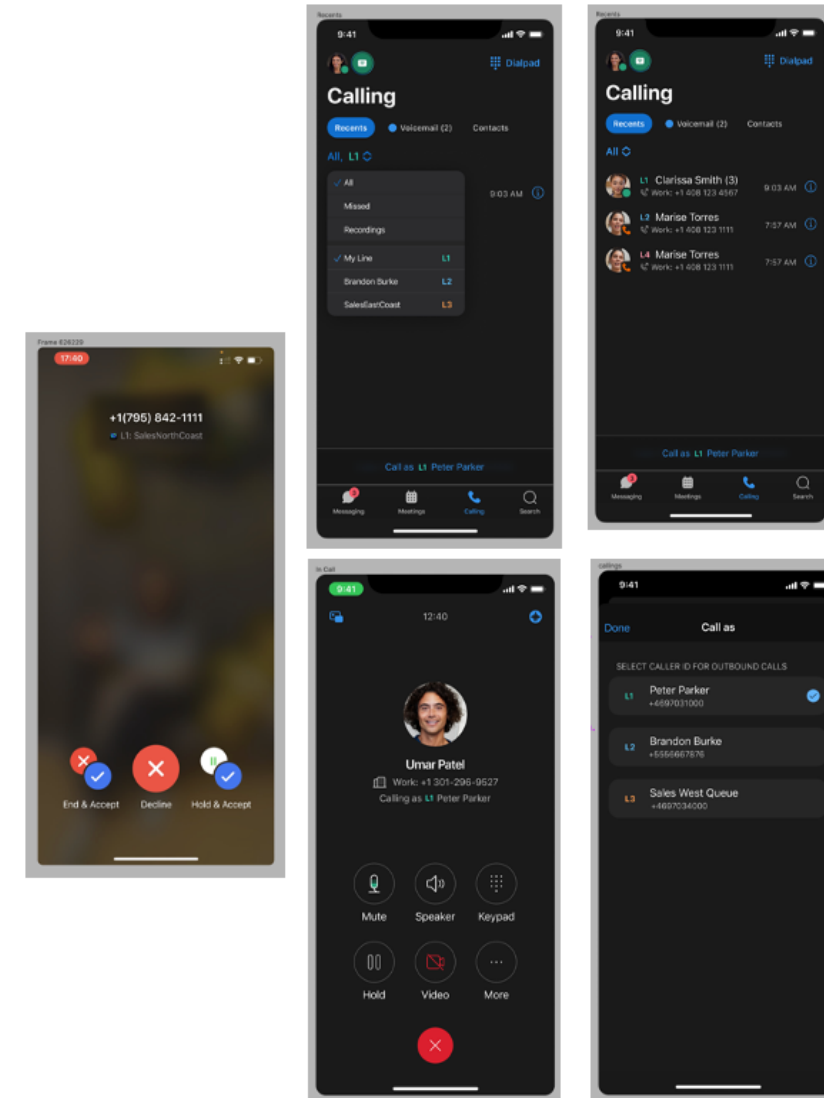



Customize incoming call ringtones

Roadmap

Subject to
Change

Allows users to customize the ringtone for incoming call notifications on their mobile devices.


"Settings -> Notifications -> Calling: Incoming calls on this device is ON", users can select a ringtone for incoming call notifications.

Applicable to single-line and multi-line users.

Multi-line users can select a ringtone for each line.

Pre-requisite:

- Android: GA mid-CY25
- iOS: single line: GA mid-CY25; multiple lines: Q1CY26

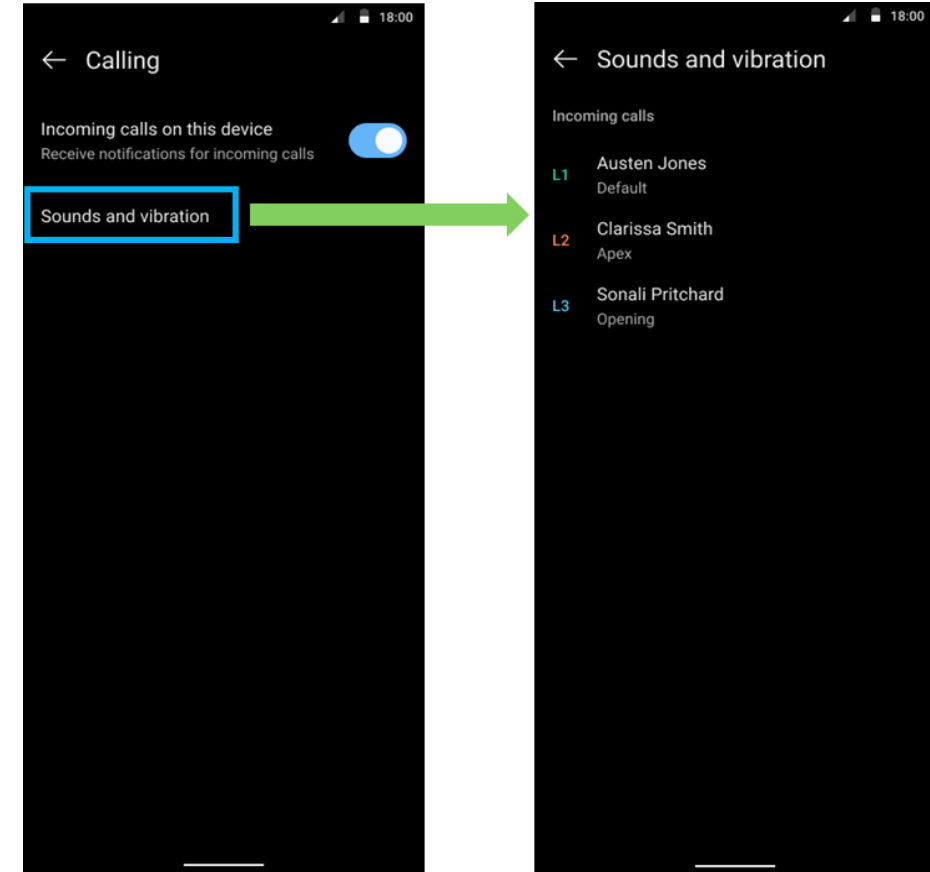

Cisco Call for Microsoft Teams

UCM, Webex Calling Dedicated Instance & Multi Tenant

Presence Sync
User presence kept consistent between MS teams and Webex



Call Tab
Access dial pad, contact search and speed dials

Dialpad
Access to dialpad to key in numbers


Add Speed dial
Click to add up to 25 speed dial cards

Contact Search
Search for personal and corporate contacts

Azure AD
Contacts

Outlook 365
Contacts

Contact Resolution
Resolves the incoming call identifier to Azure AD

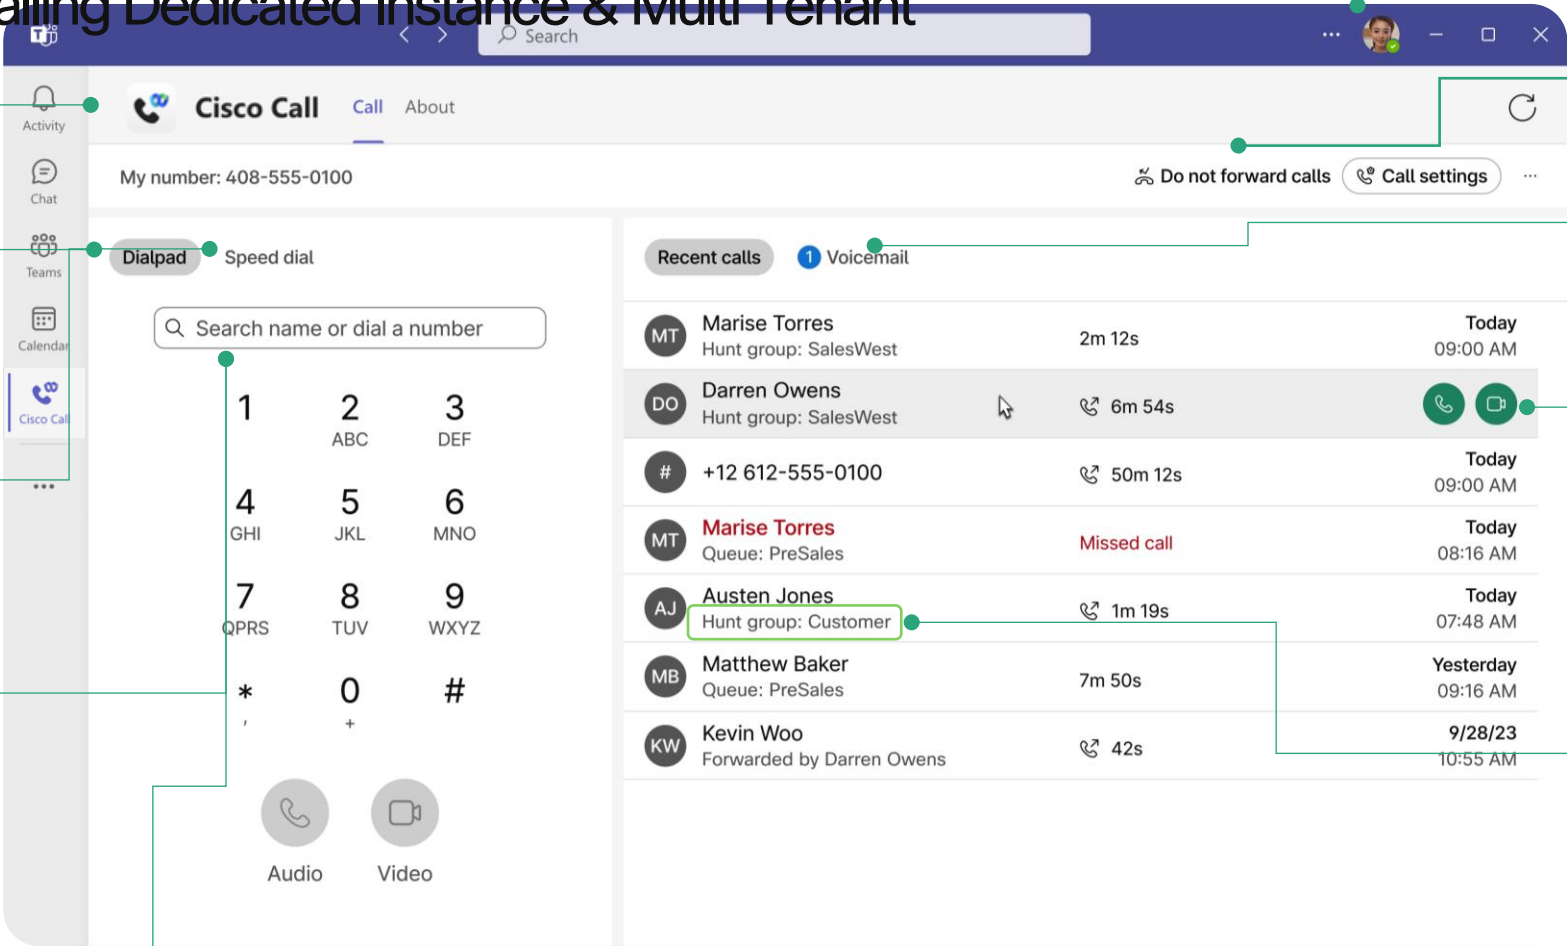

Call Forwarding
See your call forwarding status at a single glance

Voicemail
Access and play back the voicemail

Call
Select number and call contact

Call History
See history of incoming/outgoing/missed calls
Also shows if the call comes from a **Hunt Group or Call Queue (MT)**

Pre-requisite:

UCM 12.5 SU7 or 14 SU3 or 15 SU1
CUC - 12.5 / 14 SU3 / 15
On-premises: Webex Cloud-Connected UC (CCUC)

Cisco Call for Microsoft Teams

Seamless single app experience with recent additions like:

Single app appearance (remove branding, no Webex icon in Tray)


Phone disconnection prompt

Calling dock toggle

E911 indicator

Mute calls when on teams meeting

Bot for missed calls & voicemail notifications (New)

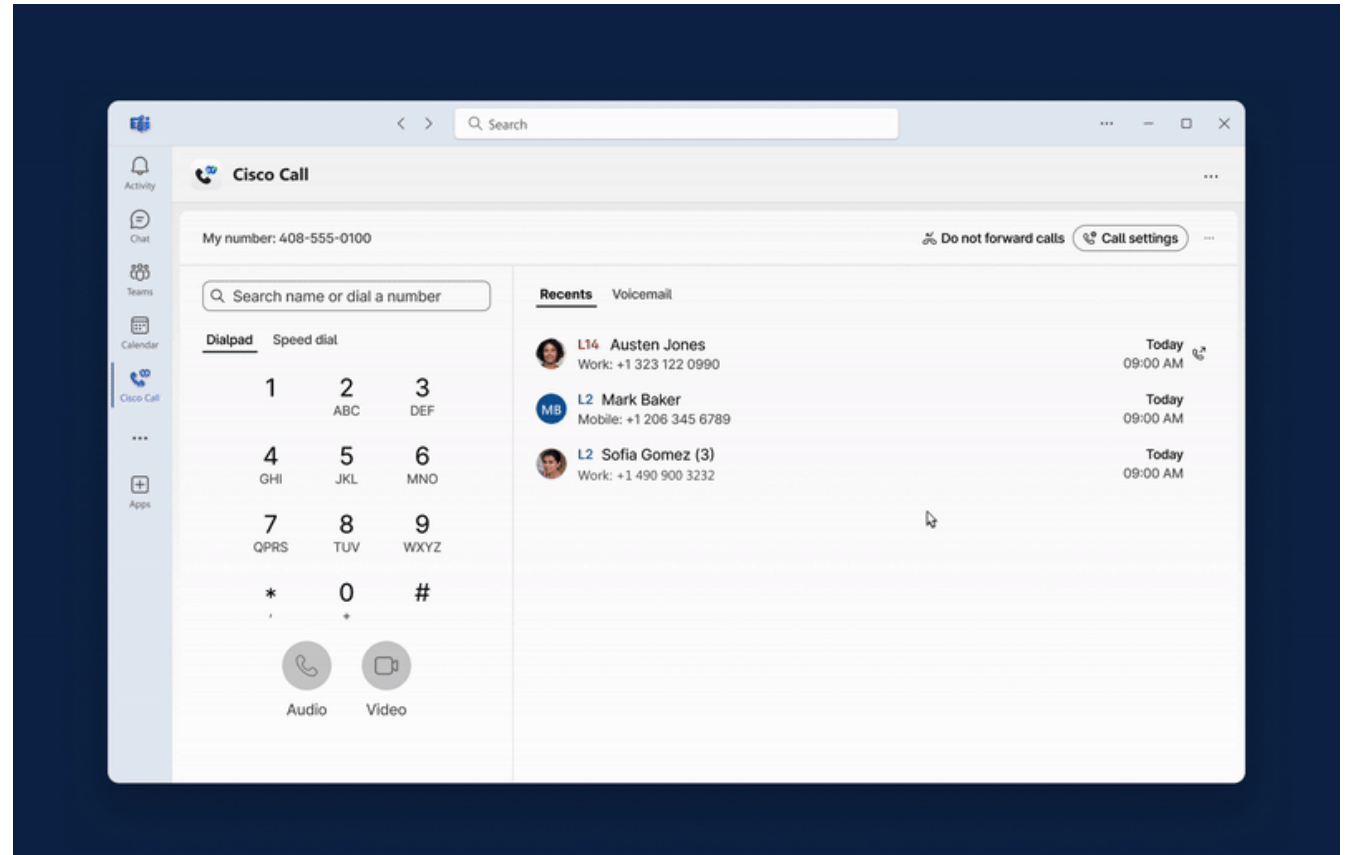

Cisco Call for Microsoft Teams

Seamless single app experience with recent additions like:

Single app appearance (remove branding, no Webex icon in Tray)


Phone disconnection prompt


Calling dock toggle

E911 indicator

Mute calls when on teams meeting

Bot for missed calls & voicemail notifications (New)

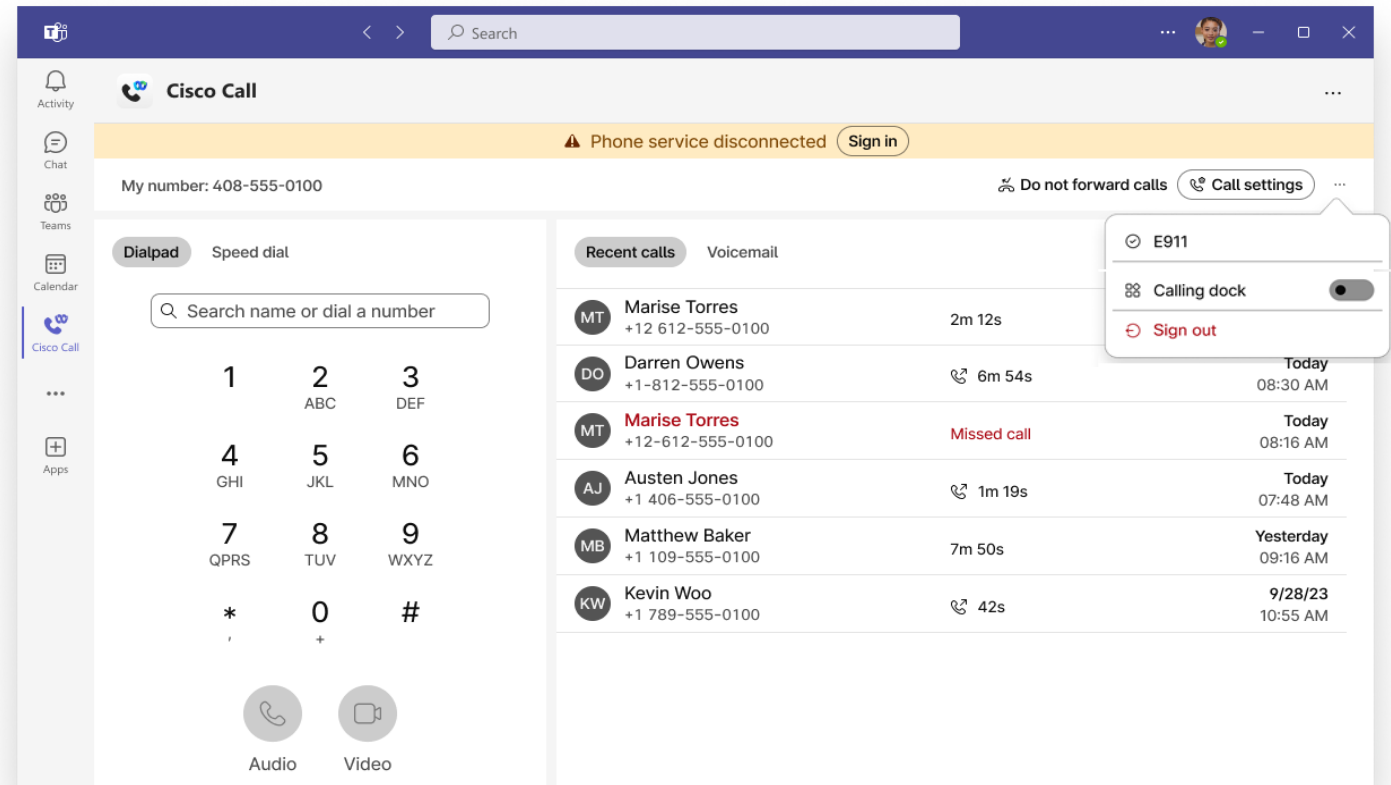


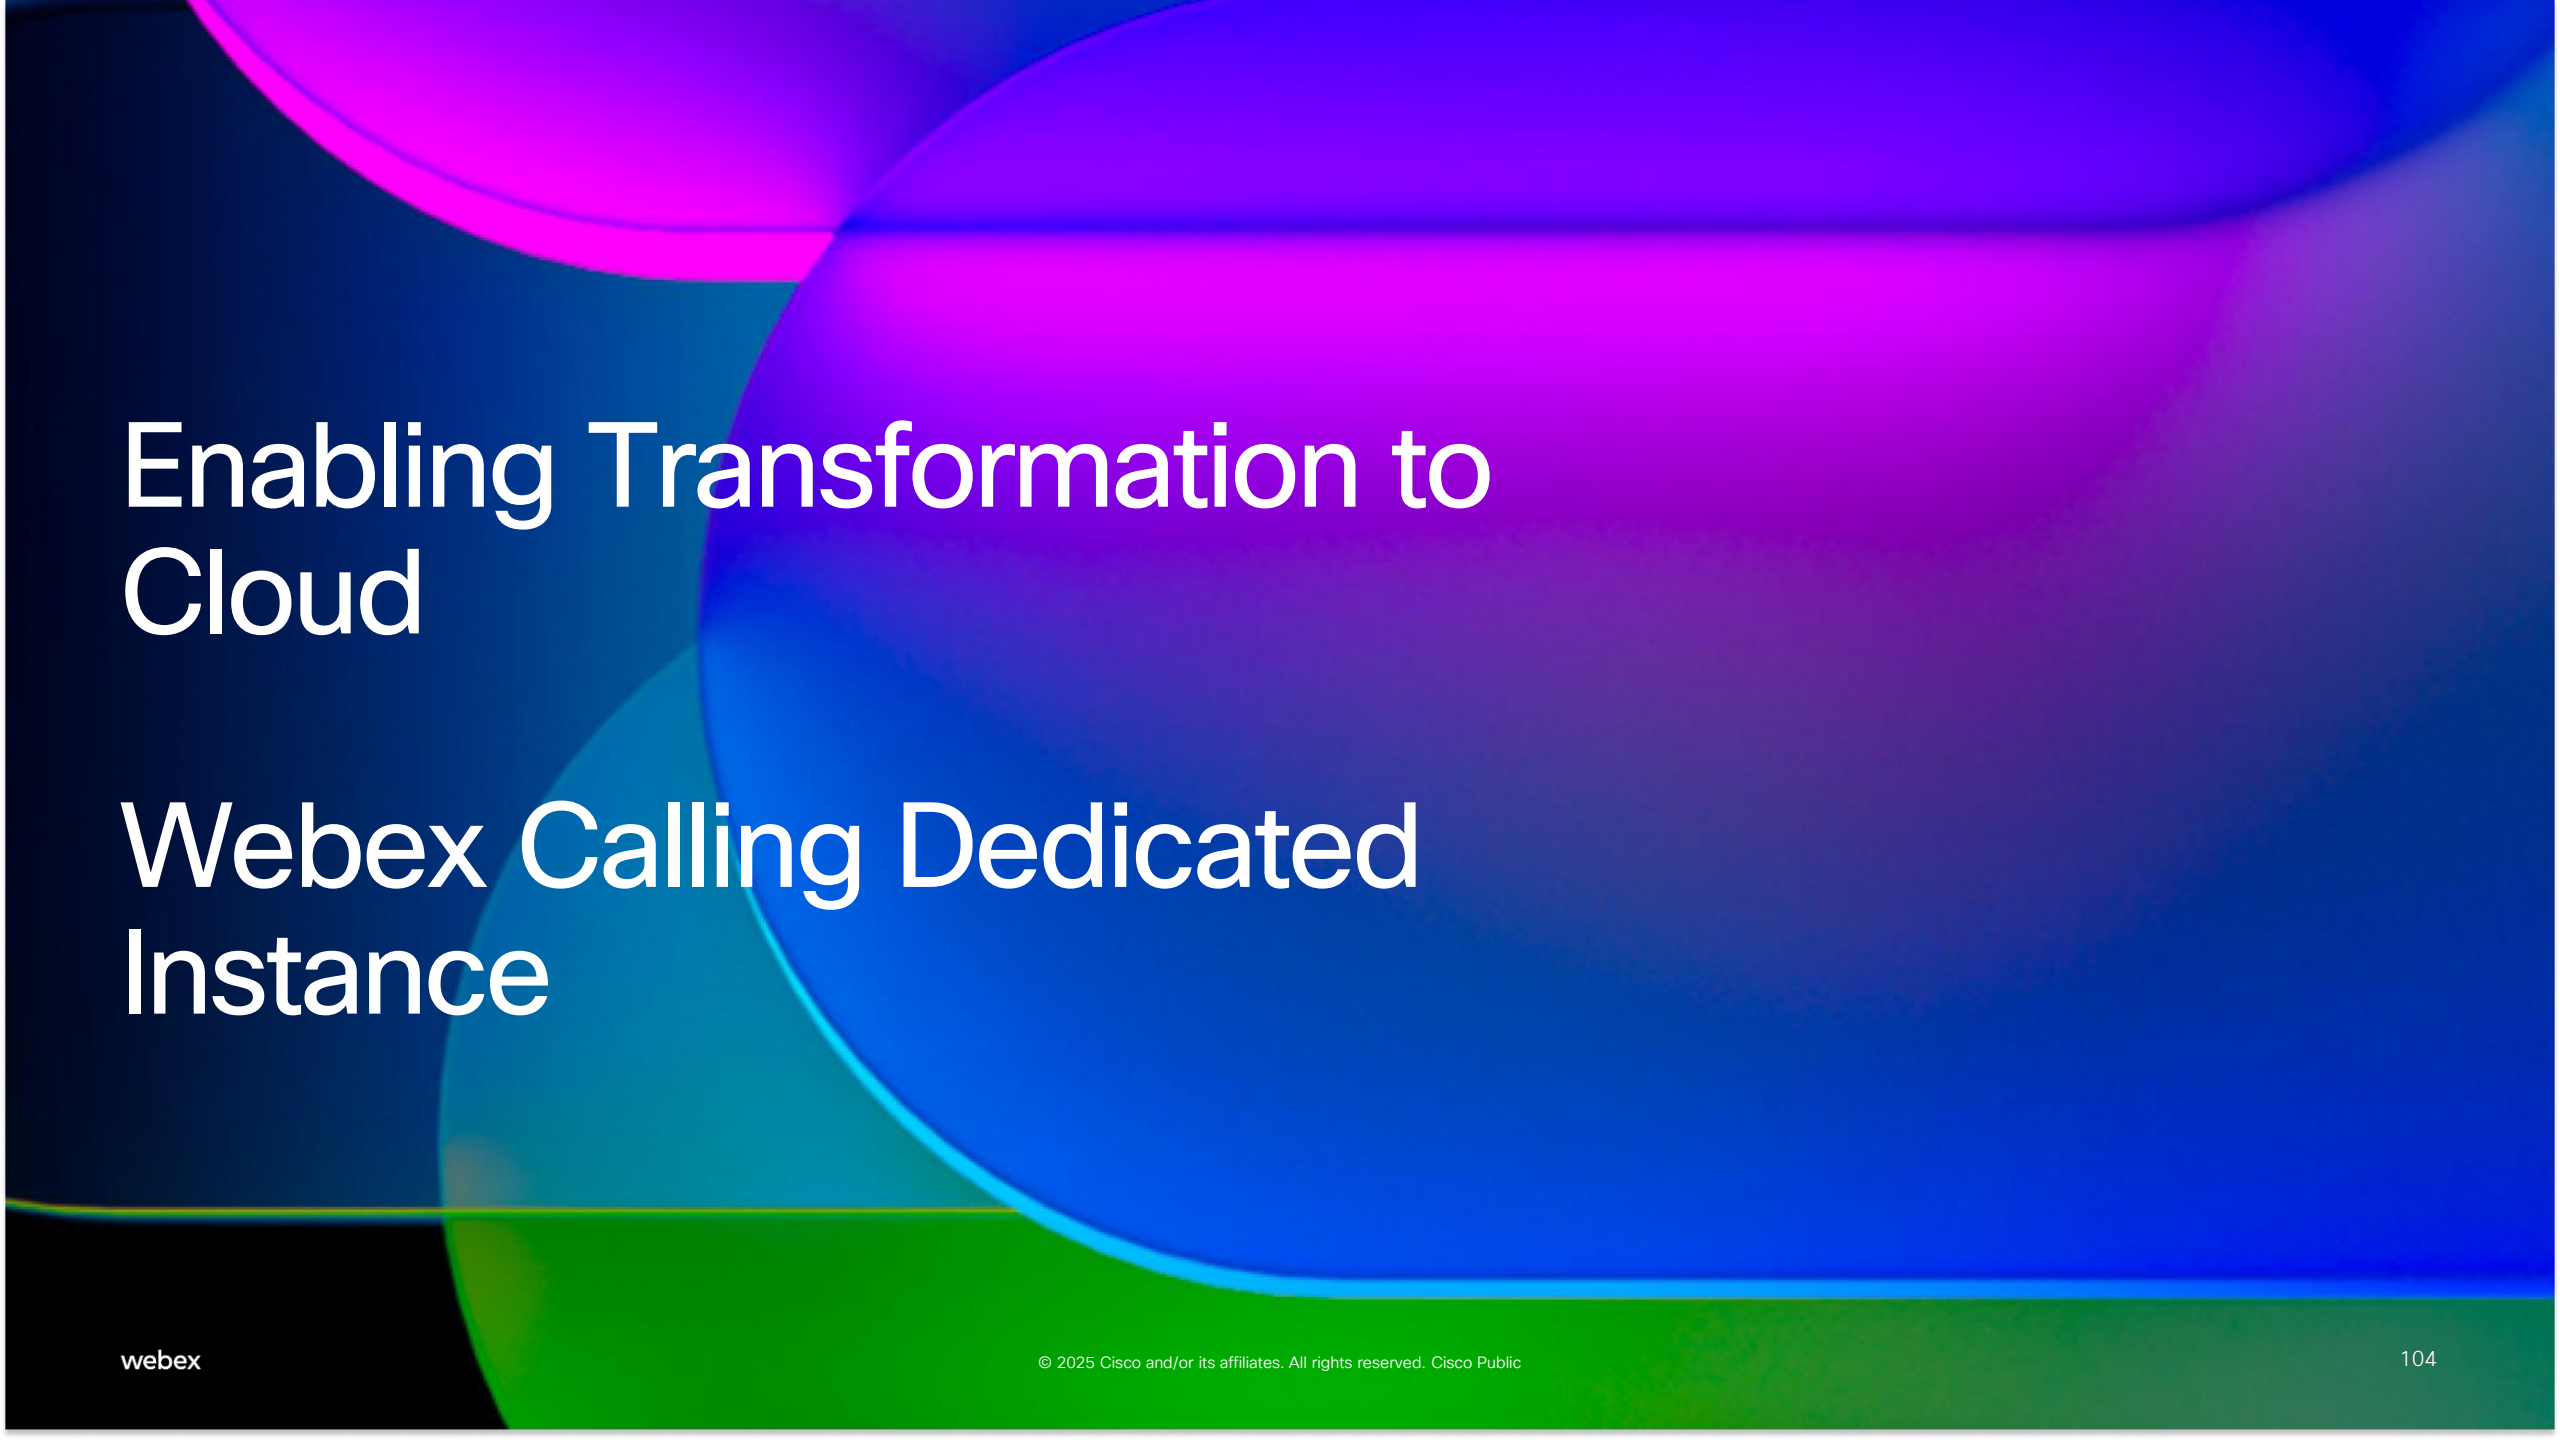

Enabling Transformation to Cloud

Webex Calling Dedicated Instance

“Get Current” means all this. If you’d rather not deal with it...

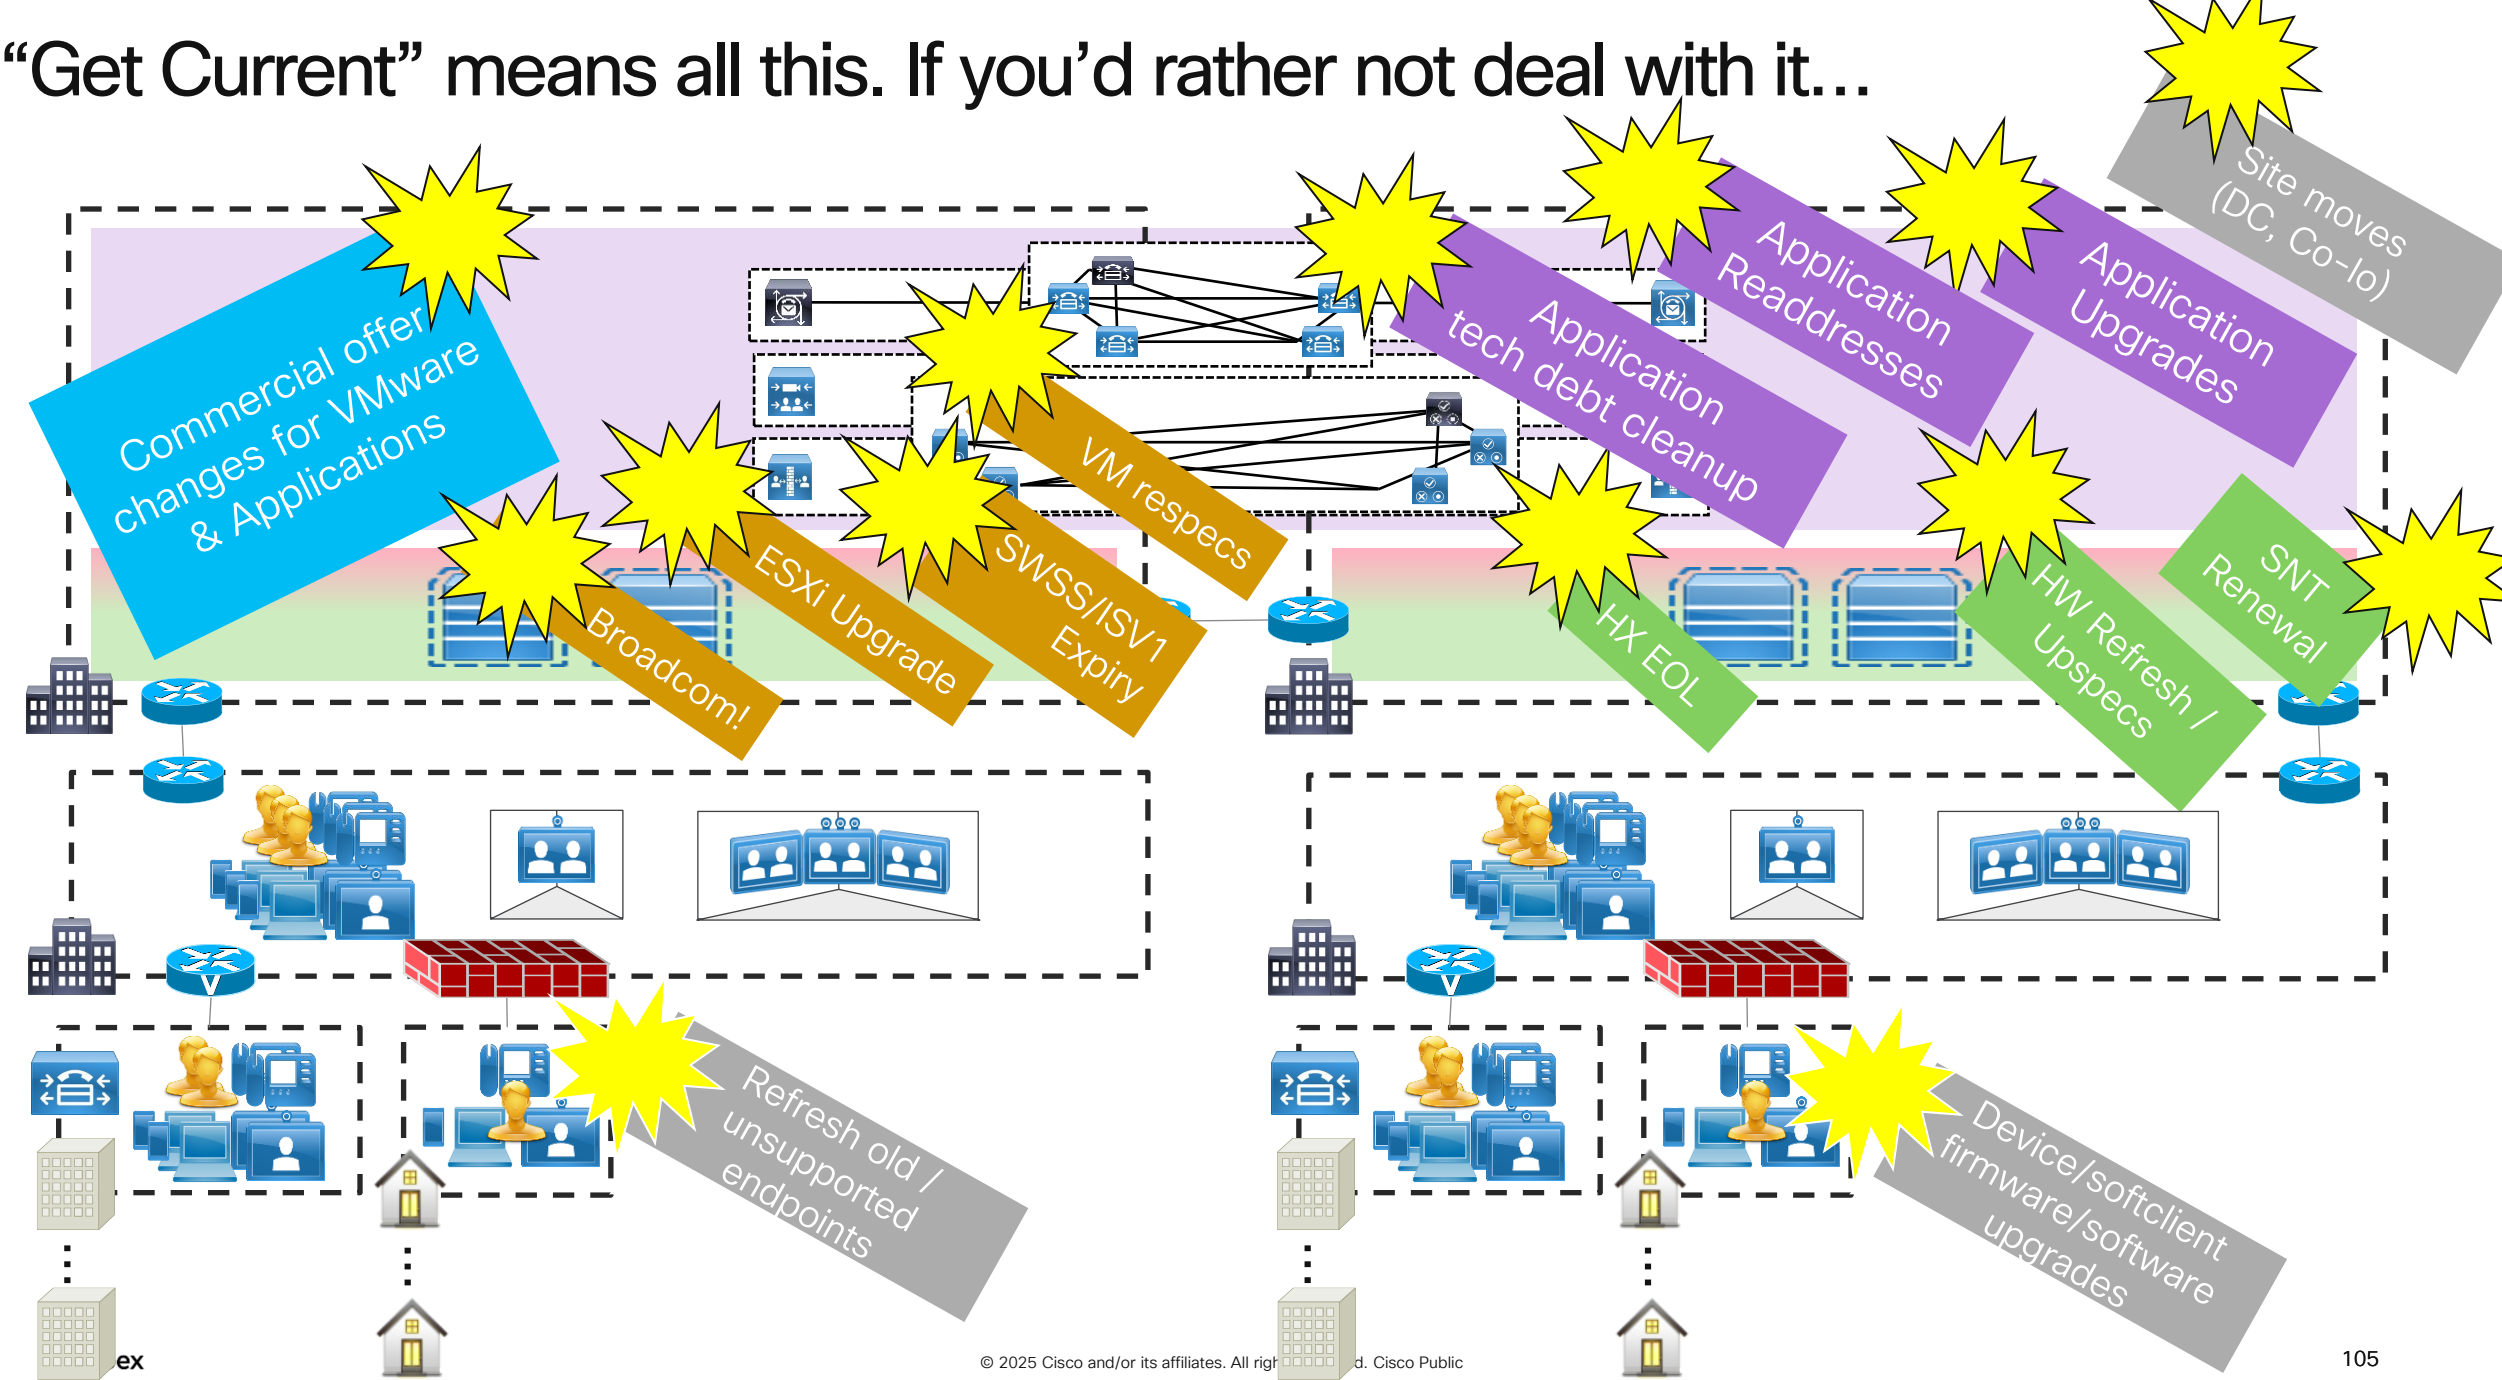


Cloud Calling – The way you want it



Webex Calling

Multi-tenant

Dedicated Instance



95%+

Feature parity
with UCM




Flexible PSTN in
190+ countries



Continuous
Innovation –
Webex App +
modern devices



Customer experience
solutions

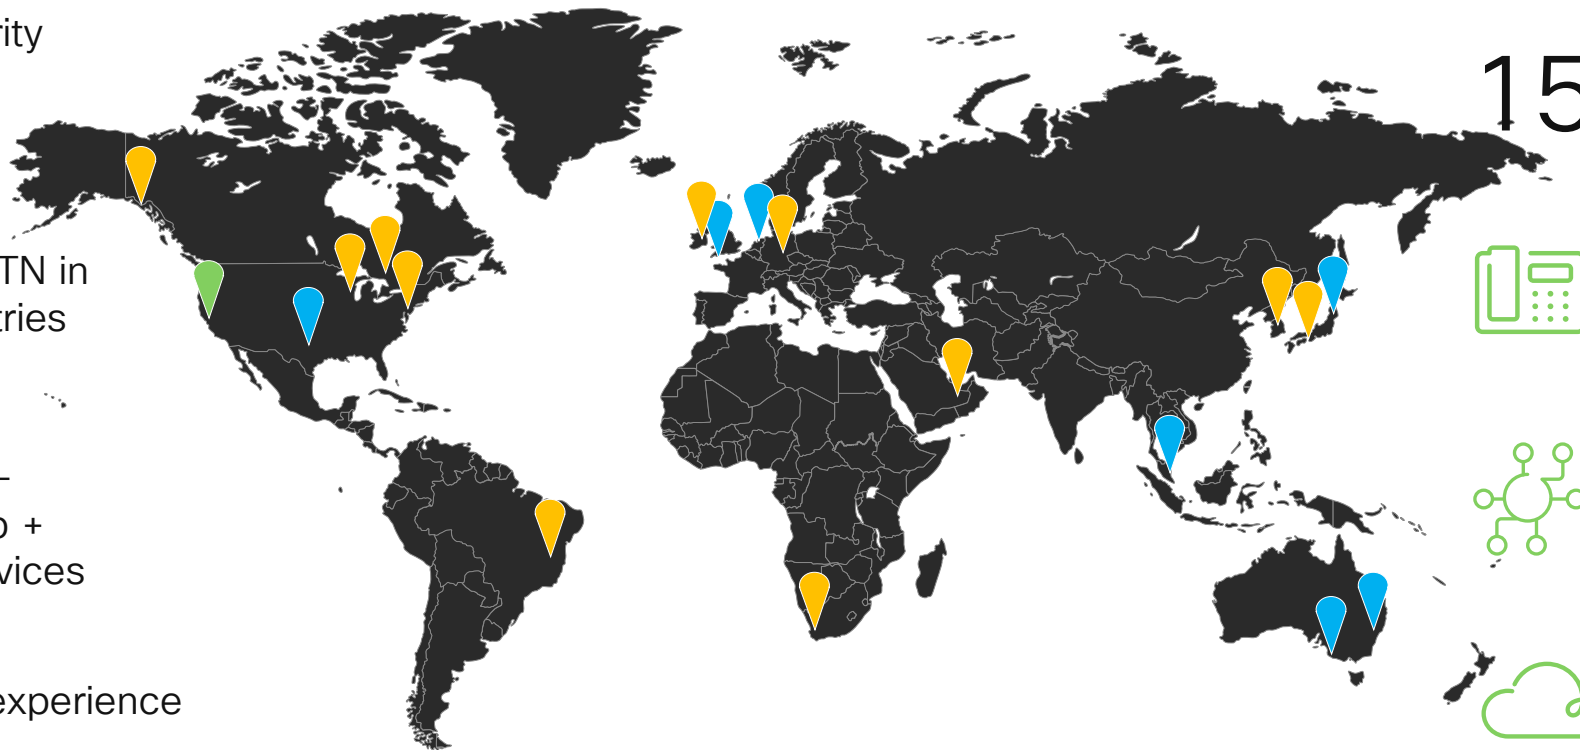

15

Latest version
of UCM



Support for
legacy endpoints



Preserve UCM
workflows and
integrations



Enhanced
Survivability

Dedicated Instance

What UCM customers can expect when moving to the cloud

-  Cisco Managed and Partner enabled
-  Flexible Connectivity / Peering
-  No disruptions supports the same rich set of UCM features Augmented with Control hub features
-  Transition to Cloud No impact on Phones or Integrations
-  Familiar user experience that facilitates swift employee migration.
-  Modernize in phases with Power of MT Platform
-  Cisco contact center interoperability for enhanced customer experience
-  Built in Security & Sustainability supporting all employee workflows



Responsibilities Matrix (RACI)




It is important for partners and customers to refer to the detailed responsibility matrix available in Webex Help: [Responsibility Matrix](#)

Multi-tenant and Dedicated Instance


Pre-configured to work together

- Flexibility to use based on the user persona
- No external hardware or SBC configurations required by partners or customers
- No additional license requirement to integrate call flows across Webex Calling Multi-Tenant & Dedicated Instance
- Easy dial plan integration that helps customers use their existing enterprise dial plans

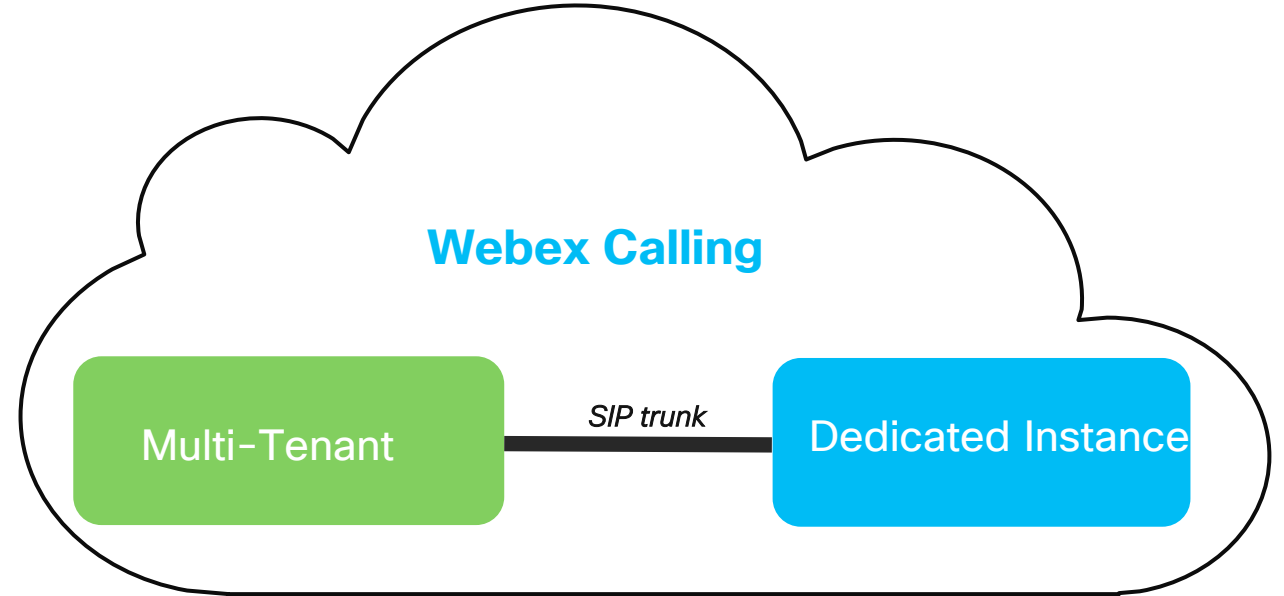

Admin Experience


Control Hub – Administrator's experience

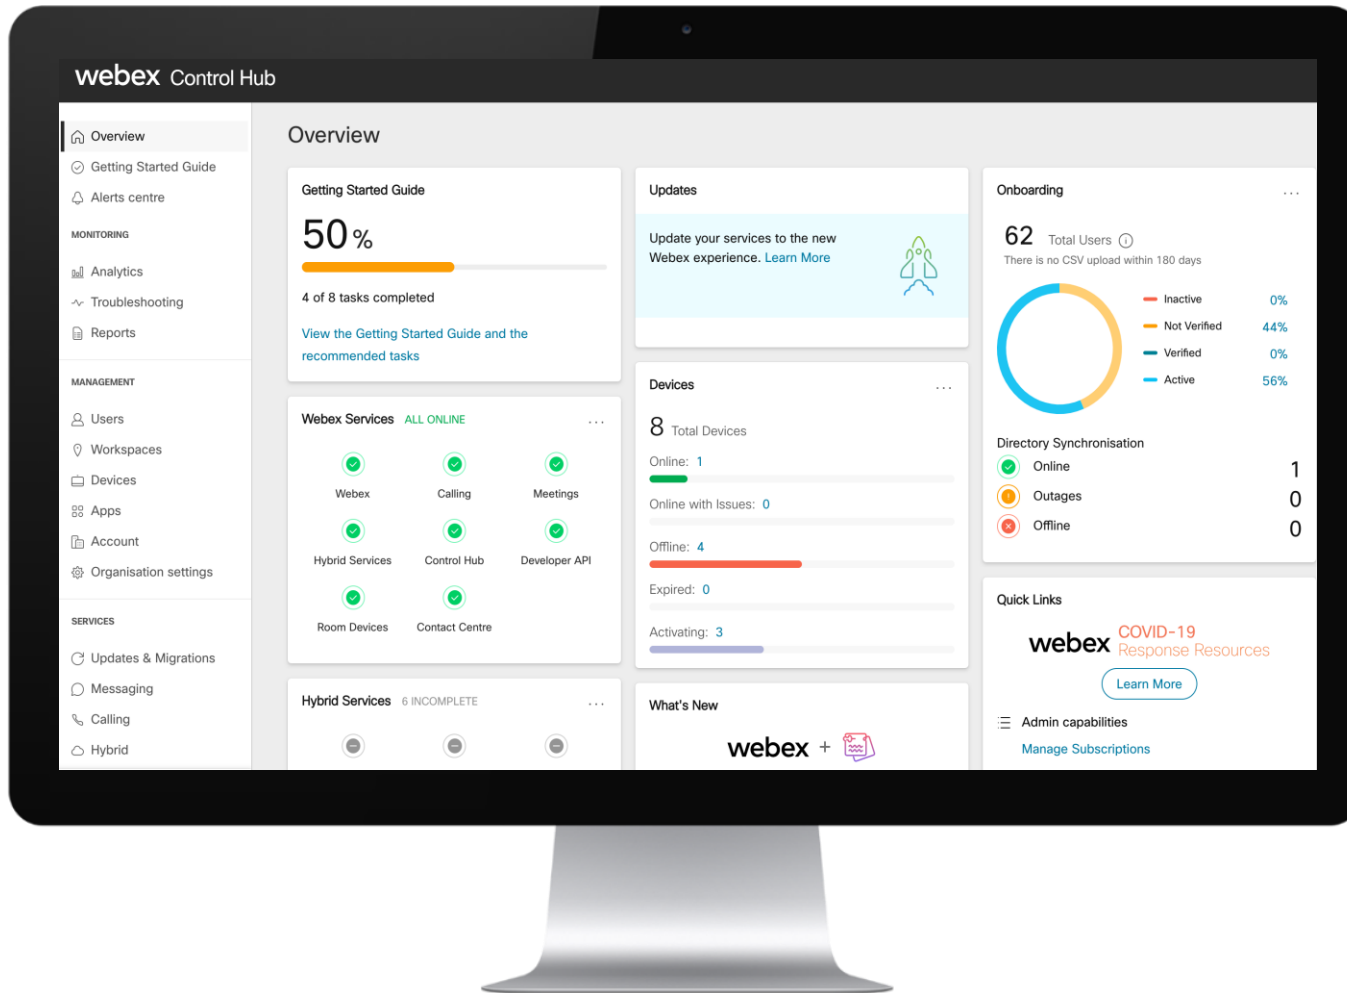

- Dedicated Instance is administered from Control Hub
- Single-pane-of glass administration, capable of supporting all phases of the service lifecycle, from configuration through optimization
- Role-based access control (RBAC) is available so different levels of administrator access can be set for customers and partners

Dedicated Instance

UC app management experience

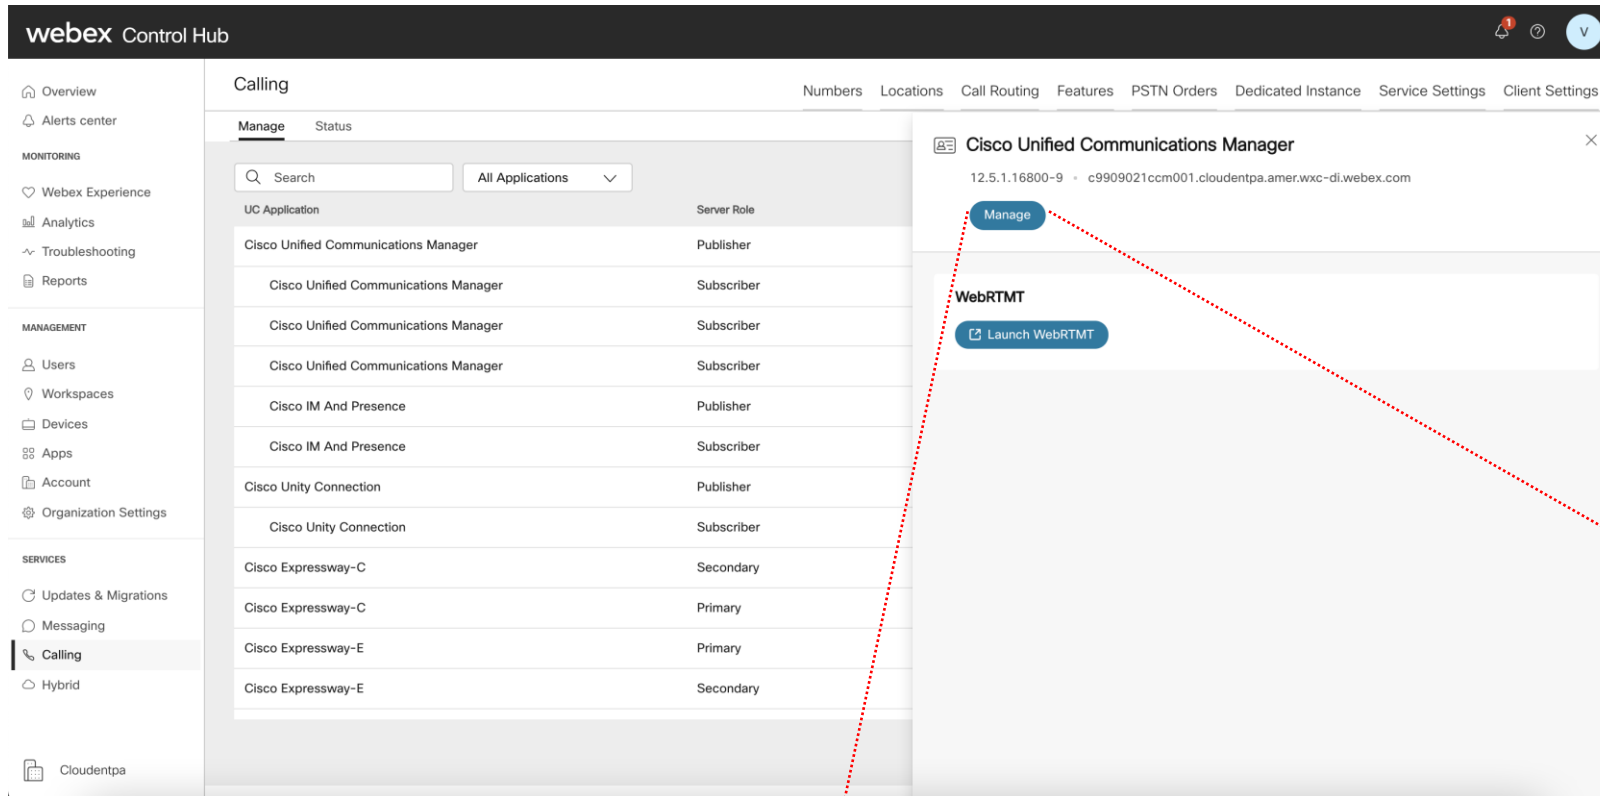

- Administrators have OTT access to all the native, standard Unified CM platform pages.
- Administrators can OTT cross-launch the Unified CM apps from Control Hub >Calling > Dedicated Instance



Dedicated Instance – Analytics features

Quality Metrics

- Call success, failures, quality and metrics
- Filter packet loss, jitter & latency

Feature Adoption

- Heat map for call/mid-call features and UC features

Asset Usage and Inventory



- Number of calls, talk time and messages
- Endpoint & headset usage

Engagement Analytics

- View calling across the organization, Call numbers & call minutes
- Daily, Weekly, Monthly views
- View endpoint, soft-client, and headset usage
- Region/Cluster-based filtering available for analytics


Capacity Analysis

- Trunk and route utilization

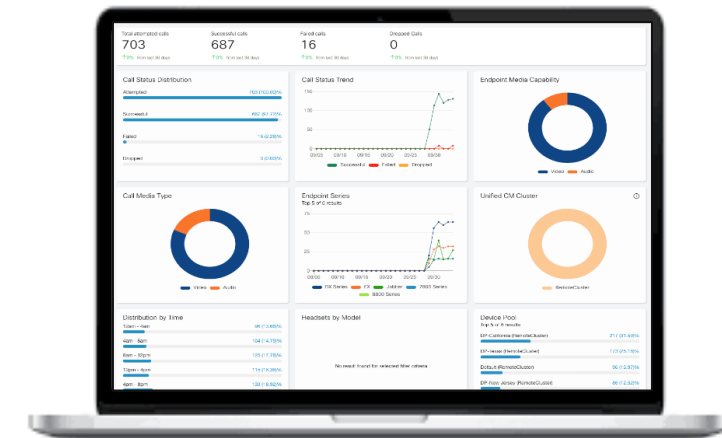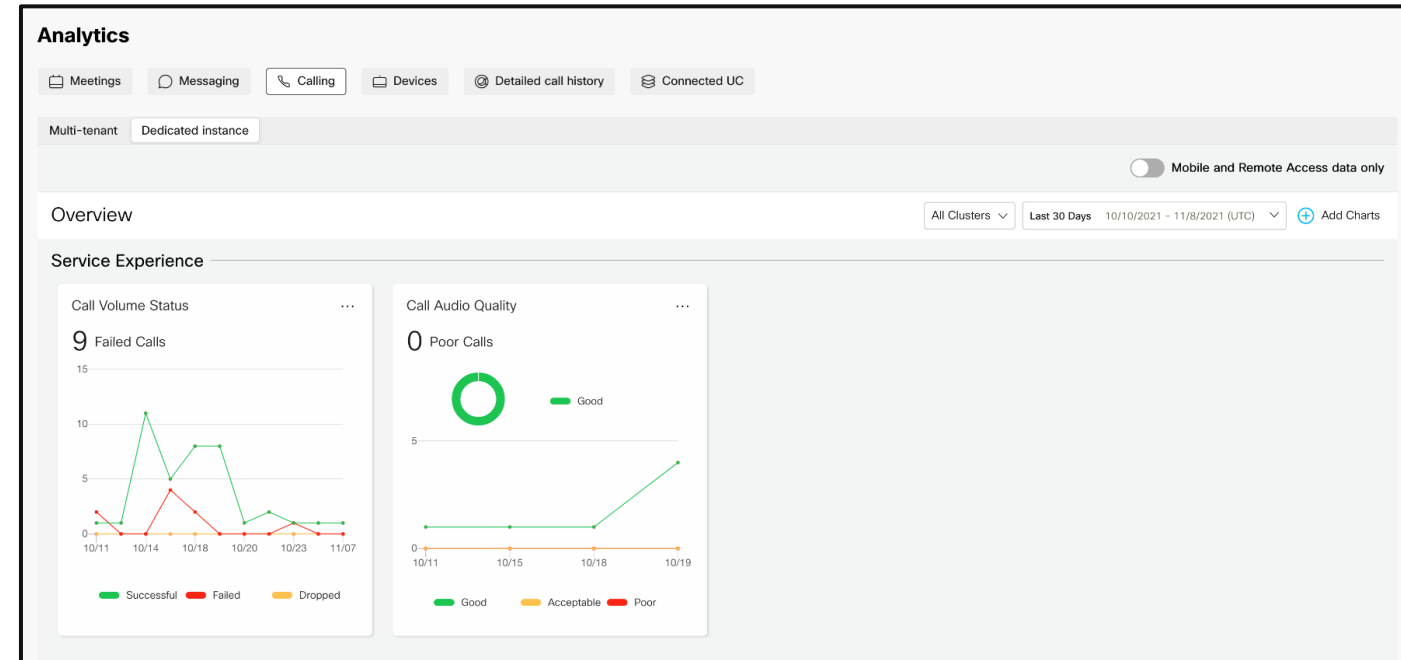

DC Locations + Connectivity + PSTN

Dedicated Instance Regions – Data Center Loc.

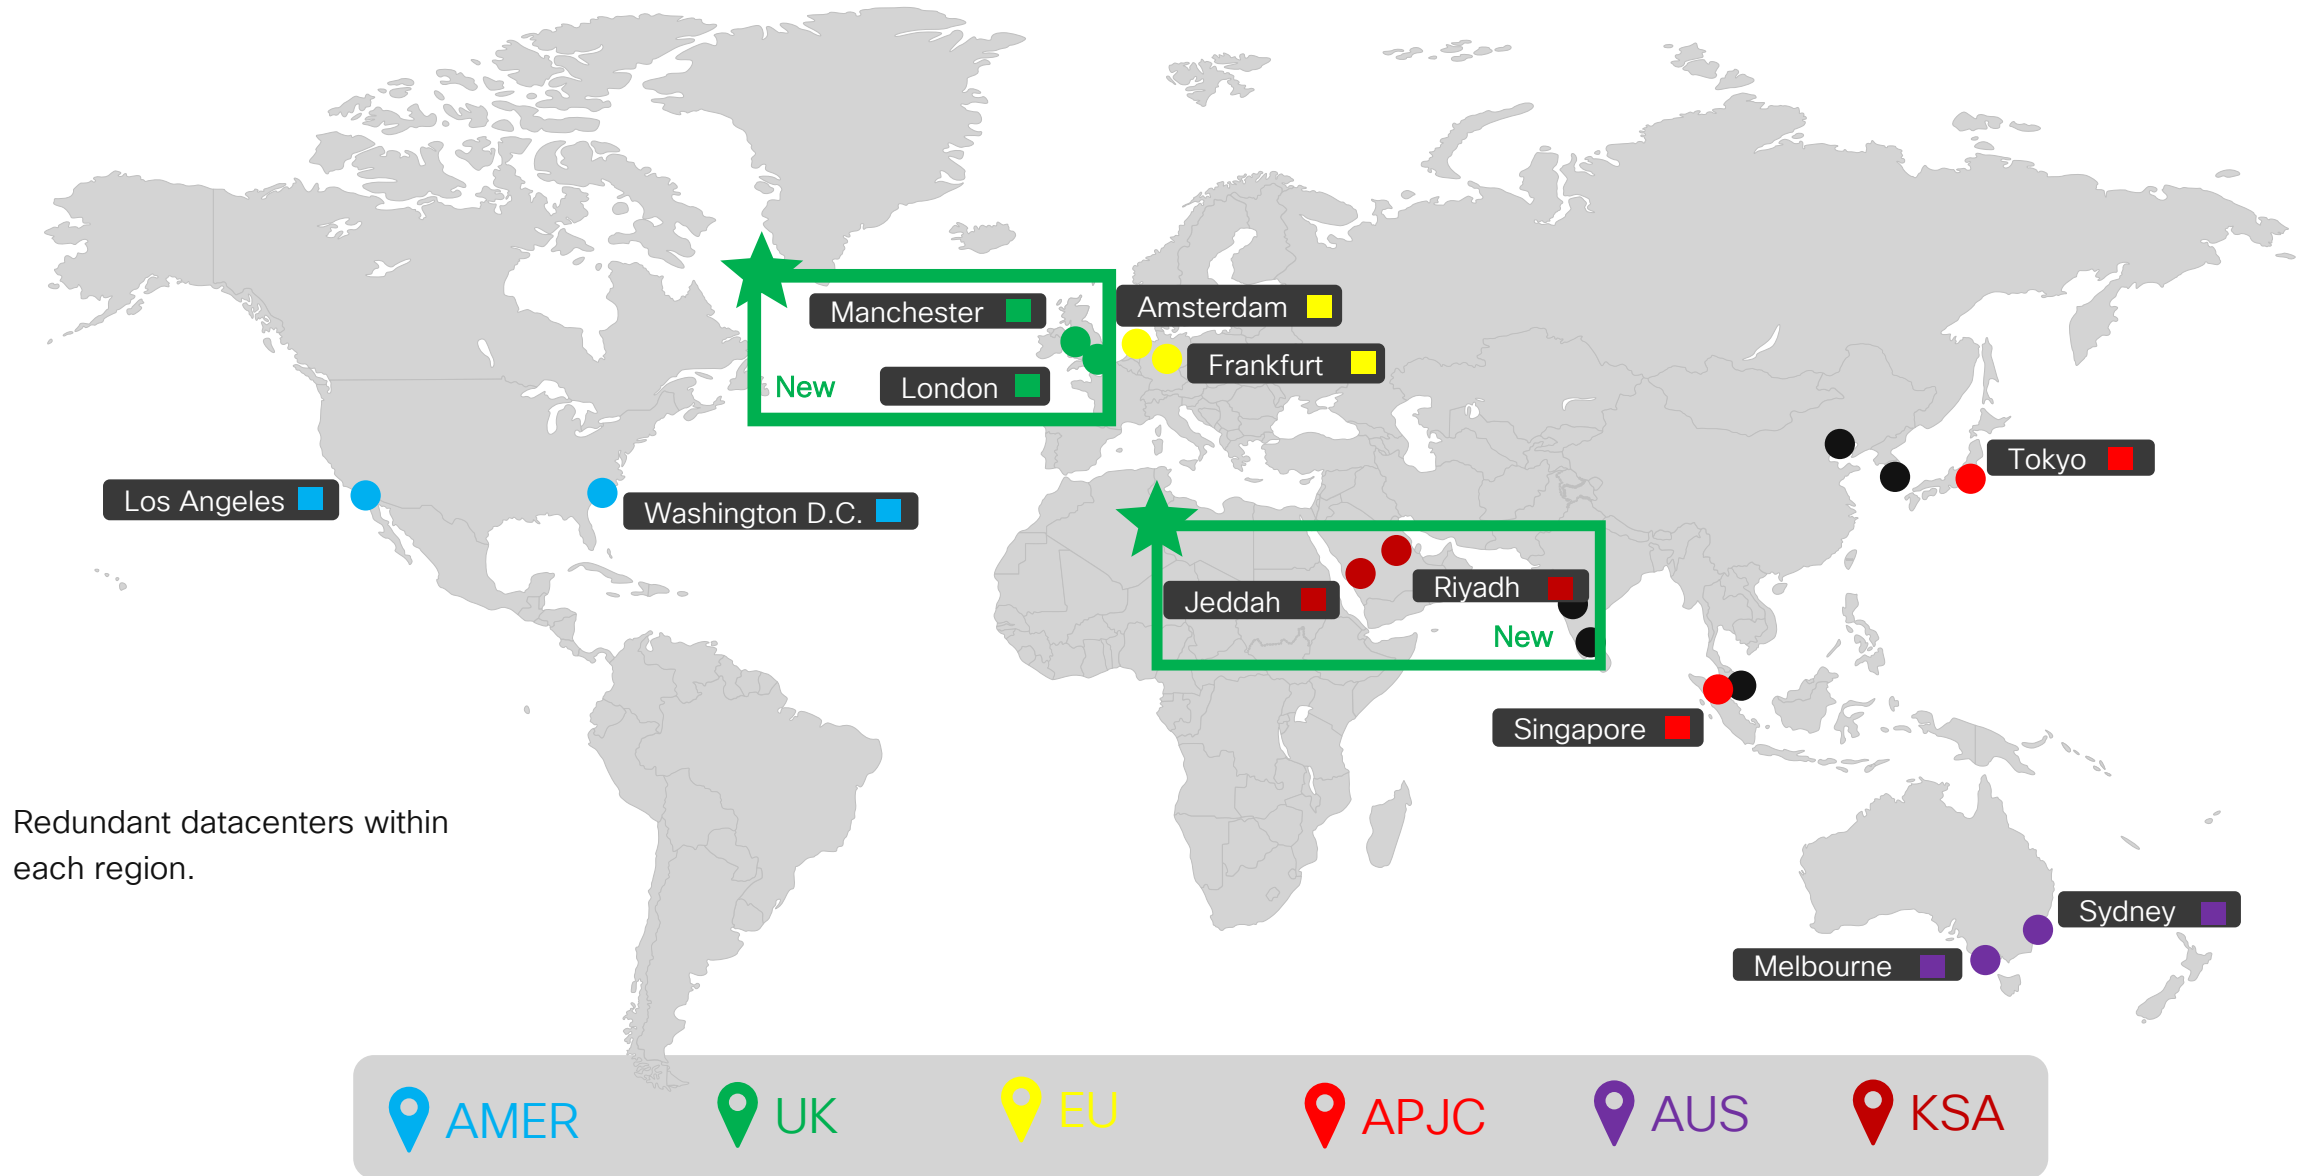

-
- The diagram illustrates the Webex Calling architecture across three data centers: AMER, EU, and APJC. A central 'Multi-tenant' cloud connects three 'Dedicated Instance' boxes. Each instance is connected to a 'SIP Trunk' and serves users in its respective region. The AMER data center serves North America, the EU data center serves Europe, and the APJC data center serves Asia-Pacific.

- HQ: Dedicated Instance
- Sales: Multi-tenant
- Support: Dedicated Instance

Cloud Connectivity Options

Dedicated Instance service is primarily delivered over a private connection to the customer premises

Webex® Edge Connect

Equinix handles network flow from customer's peering point to the Webex data center.

Partner Connect

Partner creates a physical connection to Equinix and connects to Webex® PE's either via cross connect or ECX.

Virtual Connect

Virtual Connect enables Customers to securely extend their Private Network over the internet using point-to-point IP VPN Tunnels.

What's New

Unified peering for Webex Meetings, Webex Calling multi-tenant and dedicated instance.


Megaport peering support enables customers to leverage their existing Megaport DC presence.

Partner Connect can now be activated now from Control Hub for customers.

Virtual Connect can be activated from Control Hub for customer peering.

Note: OTT access is included to service mobile and remote workers (**MRA**)

Edge Connect in ^EEquinix and ^MMegaport

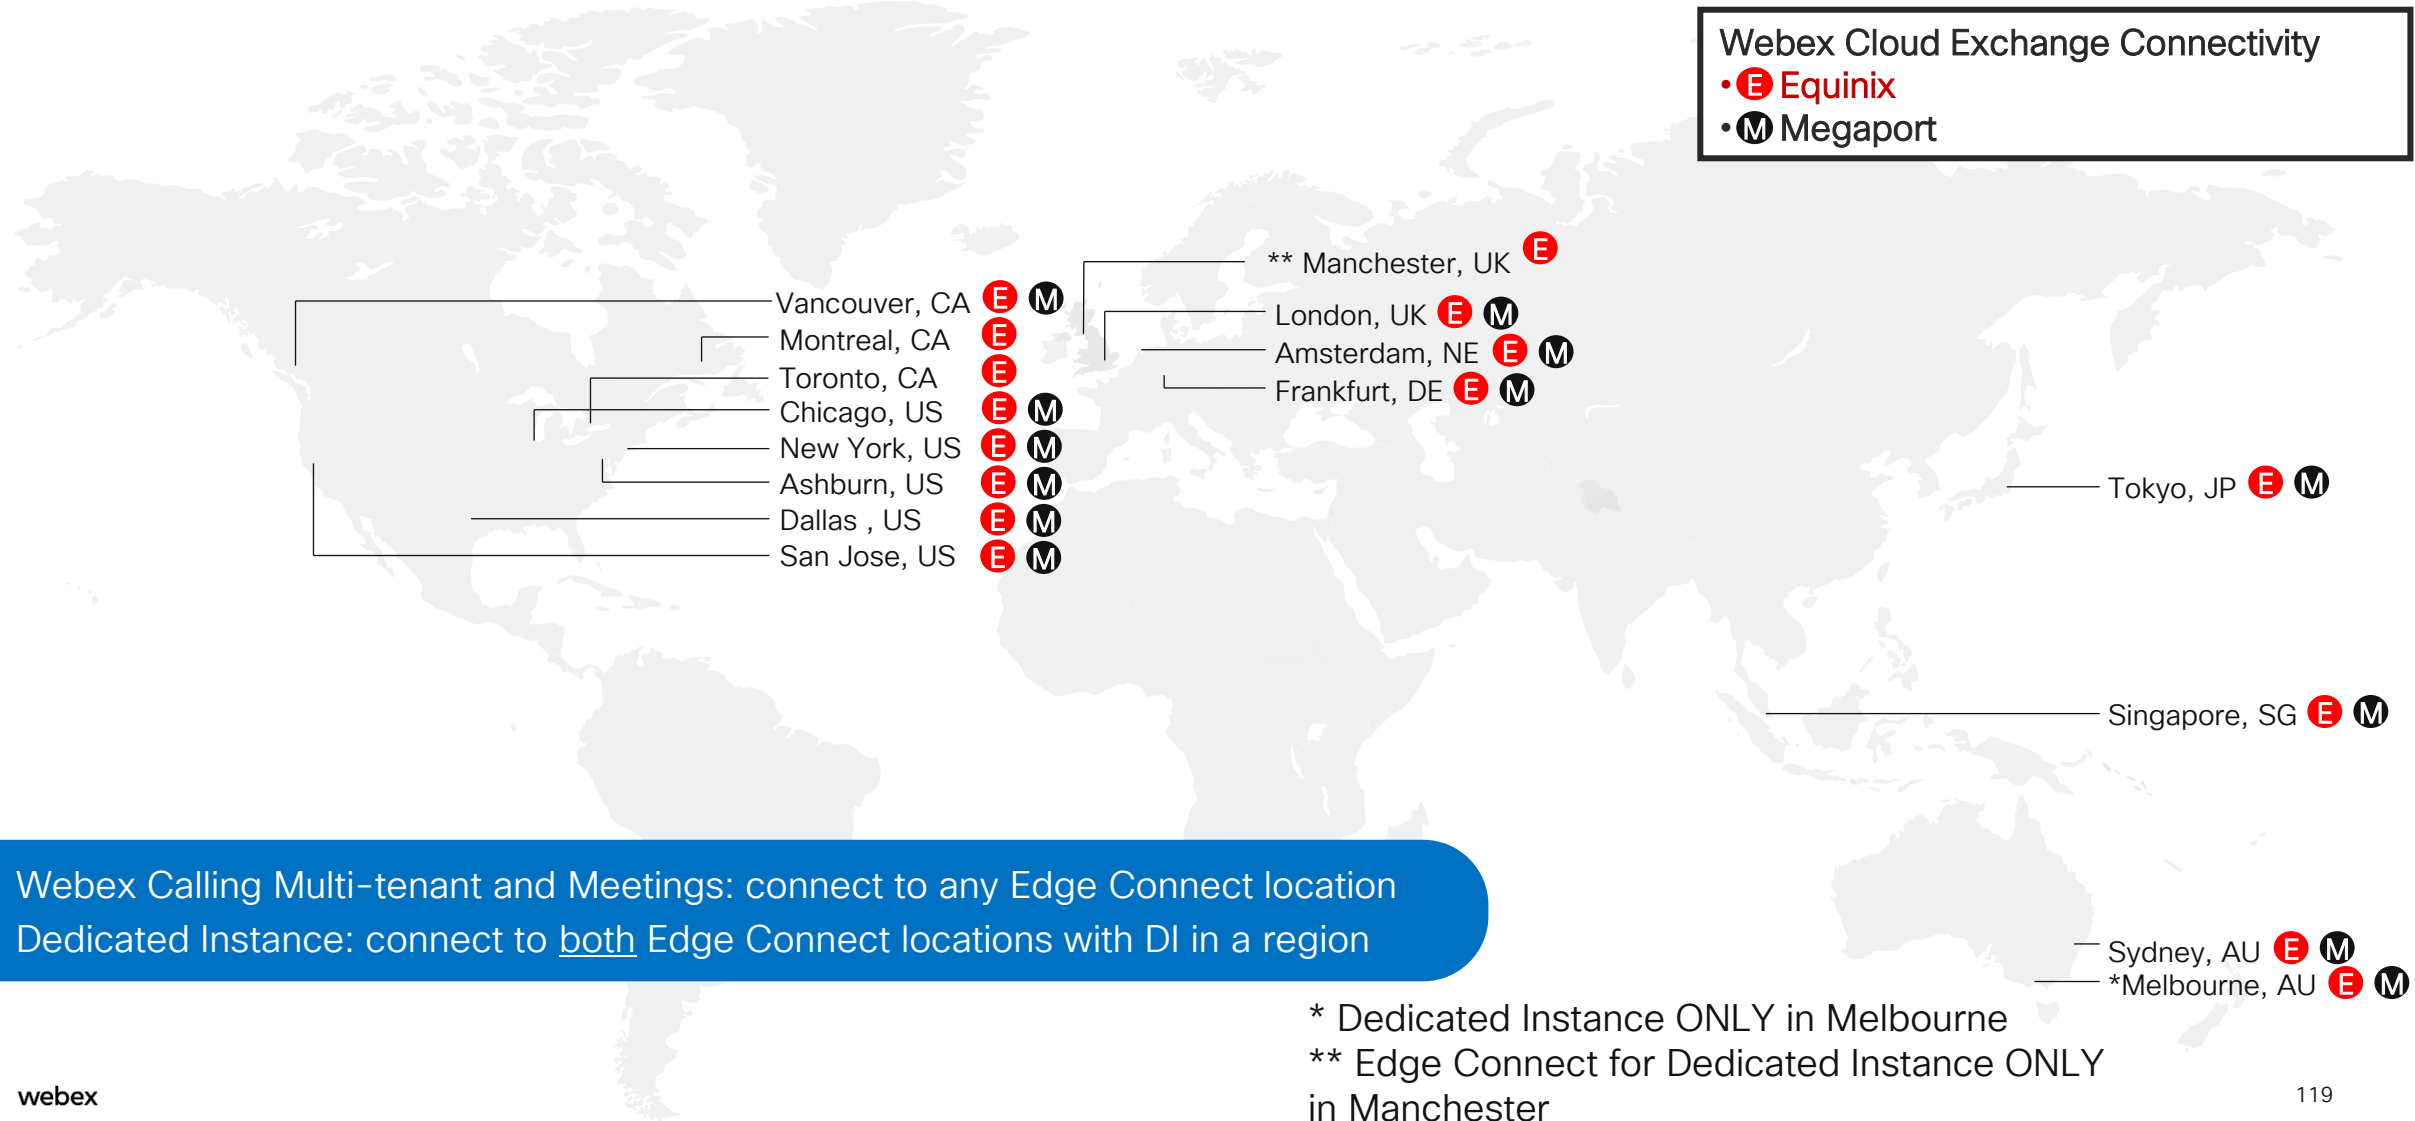

Dedicated Instance - PSTN options

Partner Hosted

- SP provides PSTN service via the ECX (partner cage)
- SP provider partner responsibility to manage dual connections

Bring Your Own PSTN (Local GW)


- Local Gateway via customer premises
- Customer/Partner responsibility to manage the connection
- Not limited to CUBE. Includes all voice gateways supported by Unified CM including ISR and ASR.
- Third Party gateways are allowed but validation is a Partner/Customer responsibility

Cloud Connect for Webex Calling (CCP)


- Cloud Connect for Webex® Calling enables global cloud PSTN calling options for Webex Calling Dedicated Instance (DI)
- Dedicated Instance leverages existing CCP partner peering with Webex Calling Multi-tenant for this feature



Cloud Connect for Webex Calling



Using Multiple CCP's to Simplify PSTN

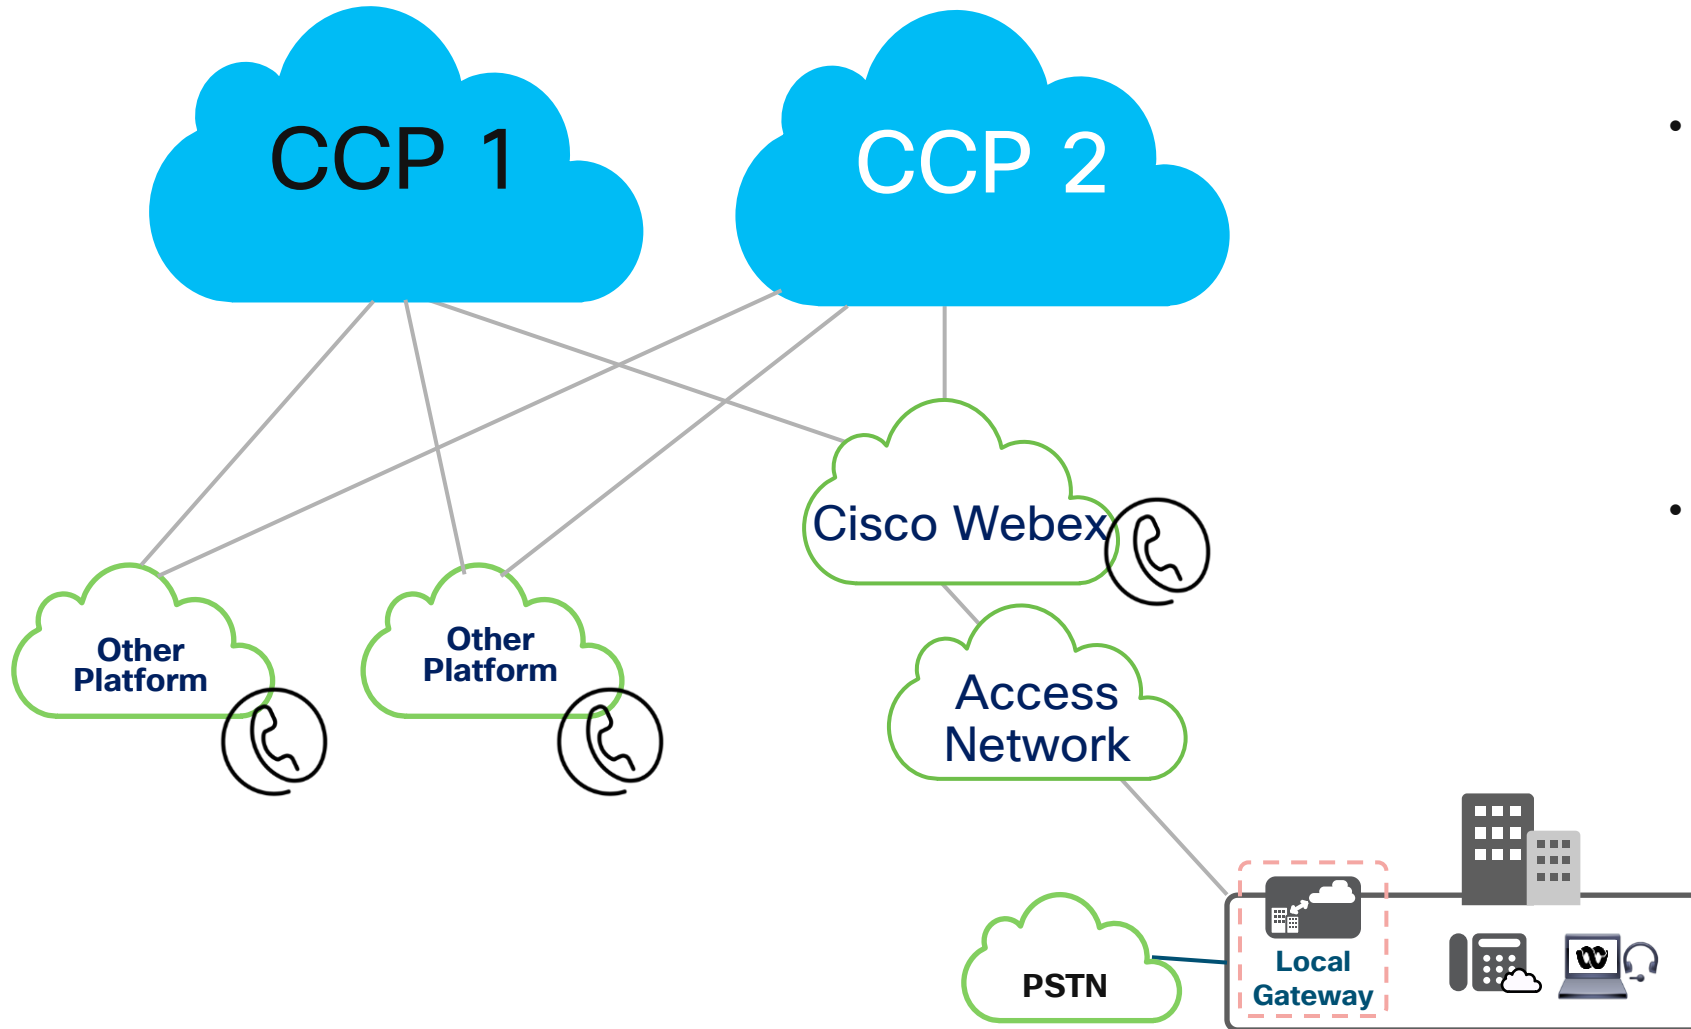


- Simplify the configuration and deployment of PSTN using Cloud Connected Partners PSTN where they can connect to other systems as well as Cisco
- Eliminate the multiple routing requirements and CUBE/SBC's in the environment.

High Availability

Dedicated Instance

Data center redundancy within each region

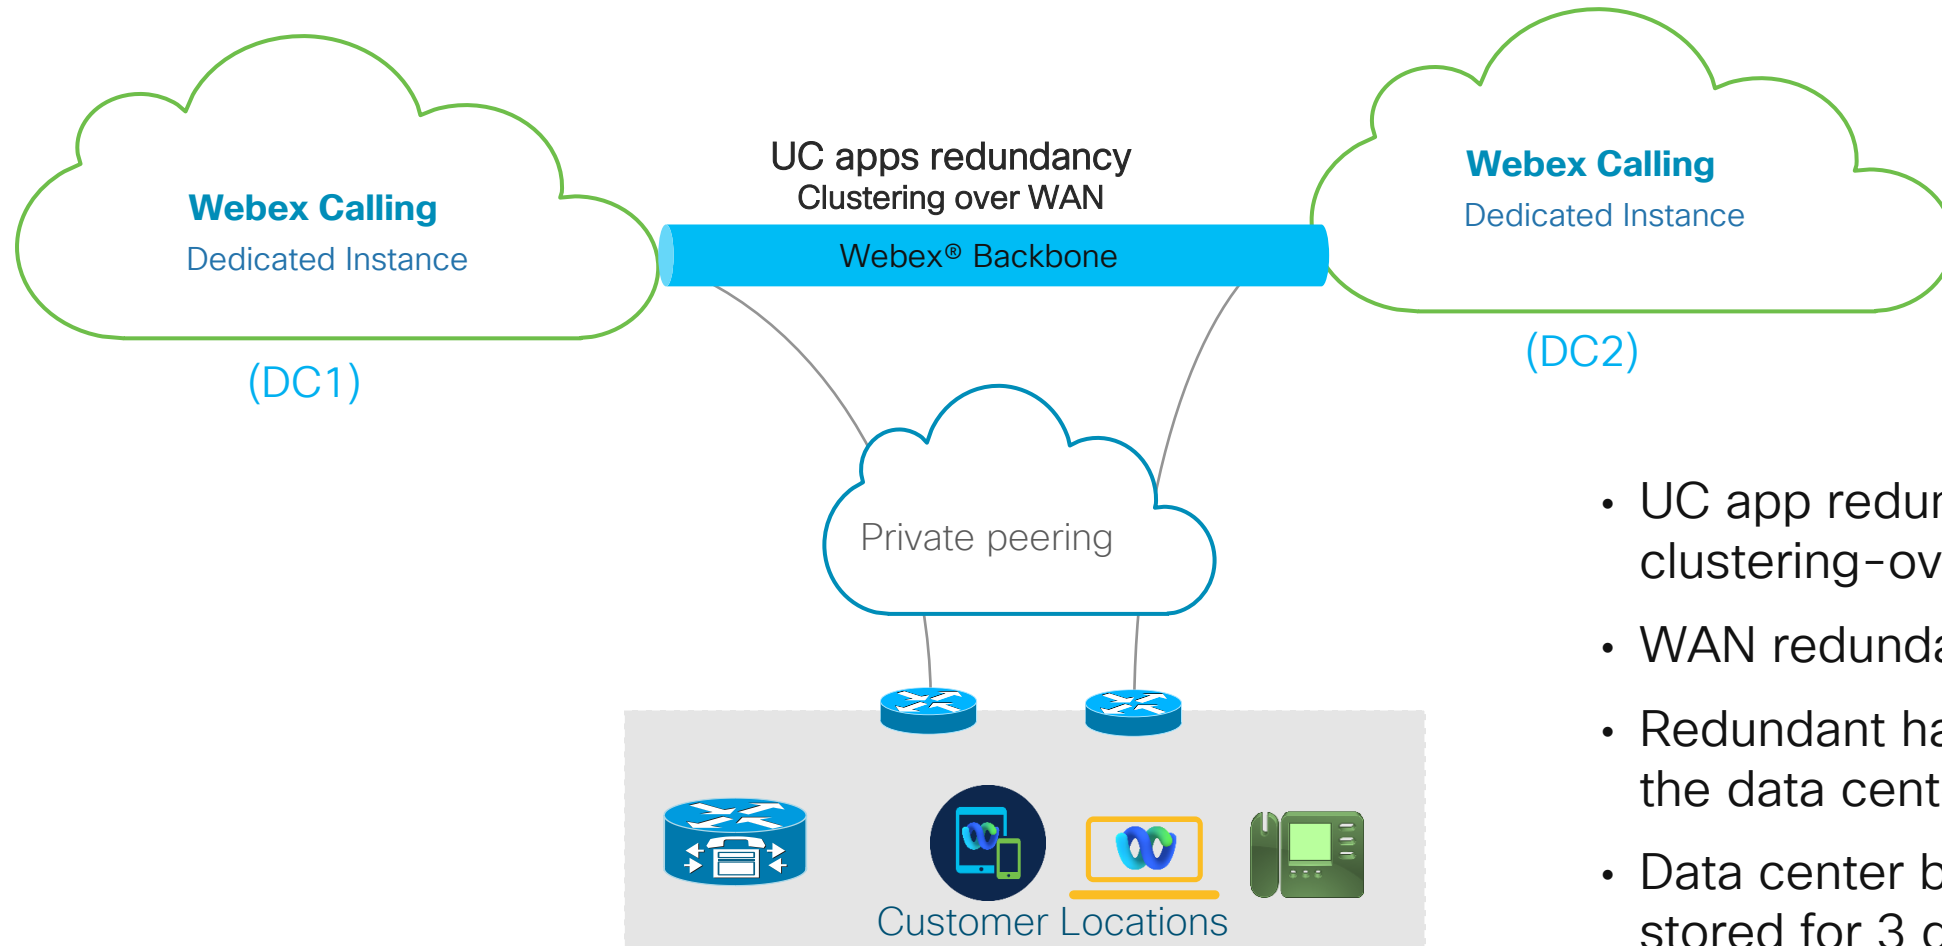

- UC app redundancy – clustering-over-WAN
- WAN redundancy
- Redundant hardware across the data centers
- Data center backups daily, stored for 3 days

Survivability for Webex Calling and Dedicated Instance


Survivable Appliance

Works just like SRST does now

Supports both the Webex App and Devices

Supported on Physical and Virtual ISR's

No configuration to manage but Dial Plans

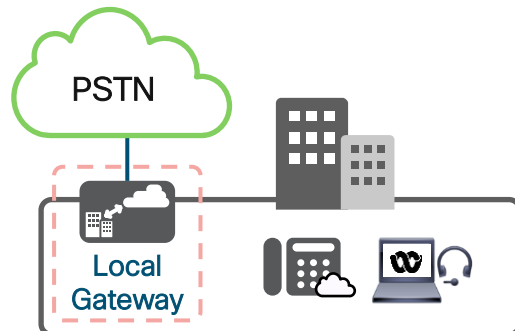


Enhanced Survivability Node

With Dedicated instance, fully operational Subscriber when Active

Supports all typical CUCM

Fully Managed by the Cloud, 8 Nodes supported per cluster

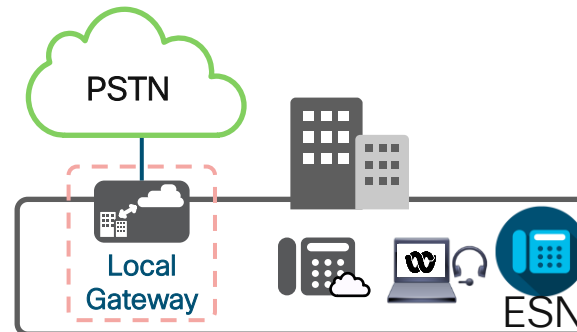

Network Path First

Calling works over secondary Internet connections

Calls will heal and re-connect when primary outage happens

Webex Calling supports Highly Latent Environments




Enhanced Survivability (ESN) Solution Overview


- Deployed on-premises and connects to Dedicated Instance in the cloud
- Devices register to the enhanced survivability node when cloud services are unavailable
- All call control functions, and 3rd party integrations (SIP/CTI/JTAPI/TAPI/TSP) are preserved in failover mode (3rd party client needs to support tertiary UCM node configuration).
- High density survivability - supports up to 7500 hard endpoints per node.
- Maximum 8 enhanced survivability nodes per cluster
- Cloud managed from Control Hub
- It is supported only over Partner Connect or Webex Edge Connect

Roadmap Focus :

- Pro-active monitoring and Analytics for Enhanced Survivability in Control Hub.

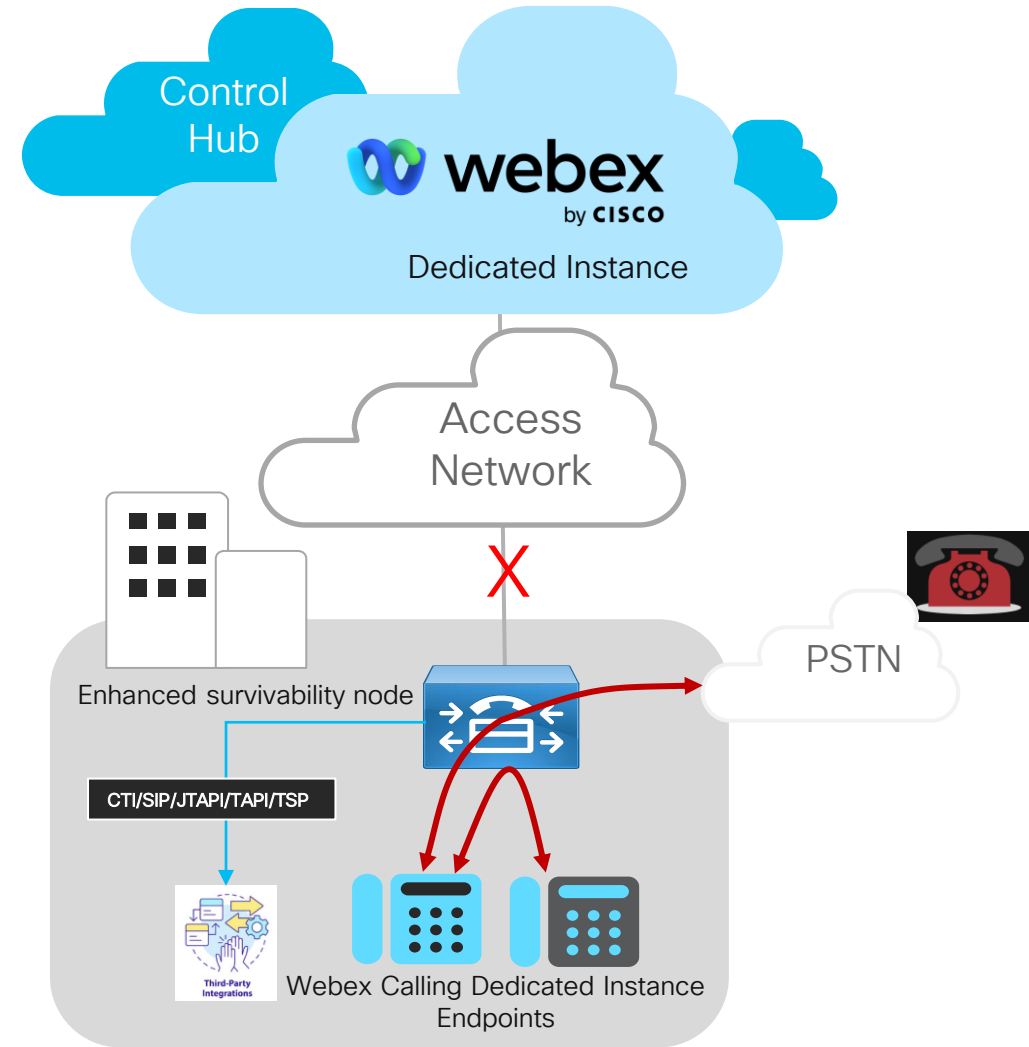

How it works, CUCM and ESNs....

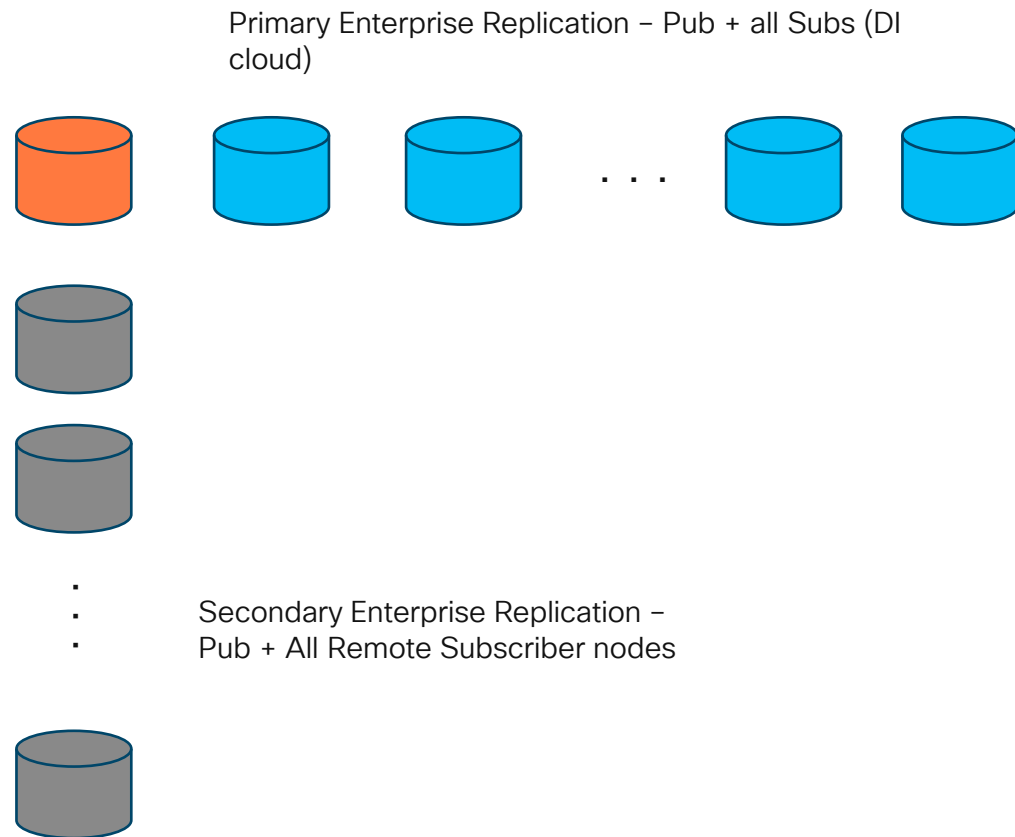

New Replication group created for ESN nodes

Only applicable for Dedicated Instance

RTT time for remote nodes < 200ms (proposed)

One way sync from publisher to remote node (no User facing feature sync)

Support up to 8 ESNs per DI cluster

ESN is always the tertiary node in the CM group

Healthcare with UCaaS

Hospital - Critical Care


Personas: Doctors, Nurses, Admins

- Deployed in Dedicated Instance
- Connected over a Partner or Edge Connect to Cisco
- Enhanced Survivability for full failover capability
- Support for legacy end points and 3rd party integrations

Clinic - Medical Office Building

Personas: Doctors, Admins, Clinical Staff

- Clinicians are highly mobile now, go between Clinic and Hospital locations regularly
- Webex Go for doctors
- OTT Connectivity with local survivability

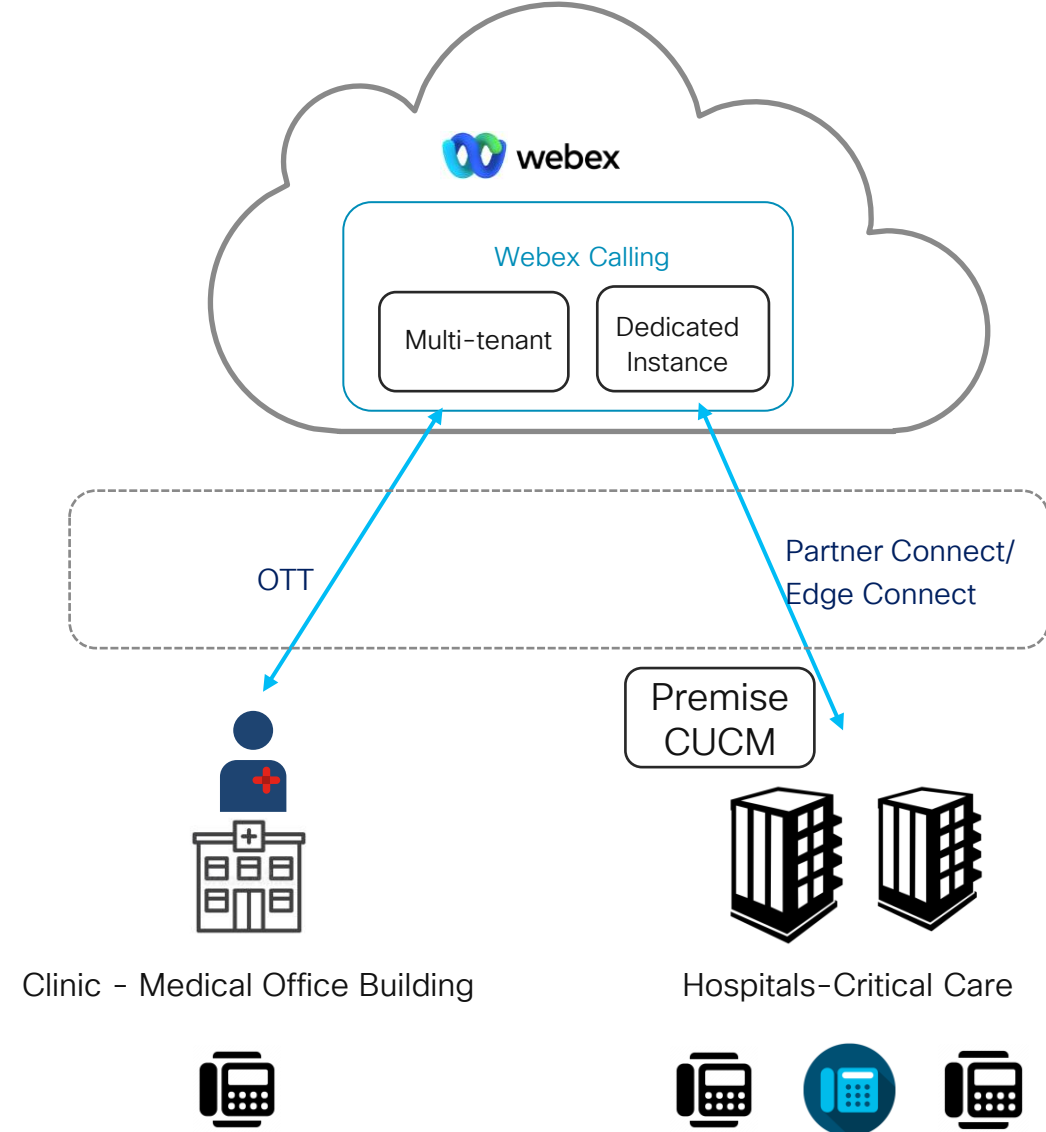

Epic

Cerner

vocera

Hill-Rom

Raoulard

VALCOM

BOGEN COMMUNICATIONS, INC.

Dedicated Instance Service Experience - Focus Areas

Service Assurance

- Strengthen monitoring / assurance framework
- Proactive monitoring w/ anomaly detection & configuration best practice
- Thousand eyes for failure correlation

Visibility

- Consolidated UC App Services Dashboard with critical service status
- Real time Quality metrics (Ex: Call Volume/Failures, Media stats, Peering status)
- Alert notification templates for partner automation

Onboarding & Management

- Control Hub Service Requests (Ex: Peering, VPN, Network/IaaS changes, Upgrade/reschedule)
- Customer driven lifecycle management
- Certificate Renewal automation

Resiliency

- Enhanced Survivability Node (ESN) enhancements
 1. Onboarding, app upgrade automation
 2. 11 node support
 3. Proactive monitoring of survivability events and CH alerts

Conclusion UC Journey

- Stay on Premises - UCM 15 and long-term Platform Updates

- Derive higher value from Cloud with Cloud Connected UC, Webex App

- Migrate to Cloud with Enhanced Survivability - Dedicated Instance

- Enterprise Grade Cloud Calling Innovation with Webex Calling multi-tenant

Expand your Knowledge this week

Ask the Expert Justin – Tuesday
245-330 Sunny Tuesday-
115pm-2pm James – Tuesday
11am-12pm

CUCM and Hybrid Presentation
Wednesday 12-1230pm Quicktake

Visit the Booth


Engage with us in the Webex Space

webexone²⁵

Share your experience!

Scan the QR code for the post-session survey



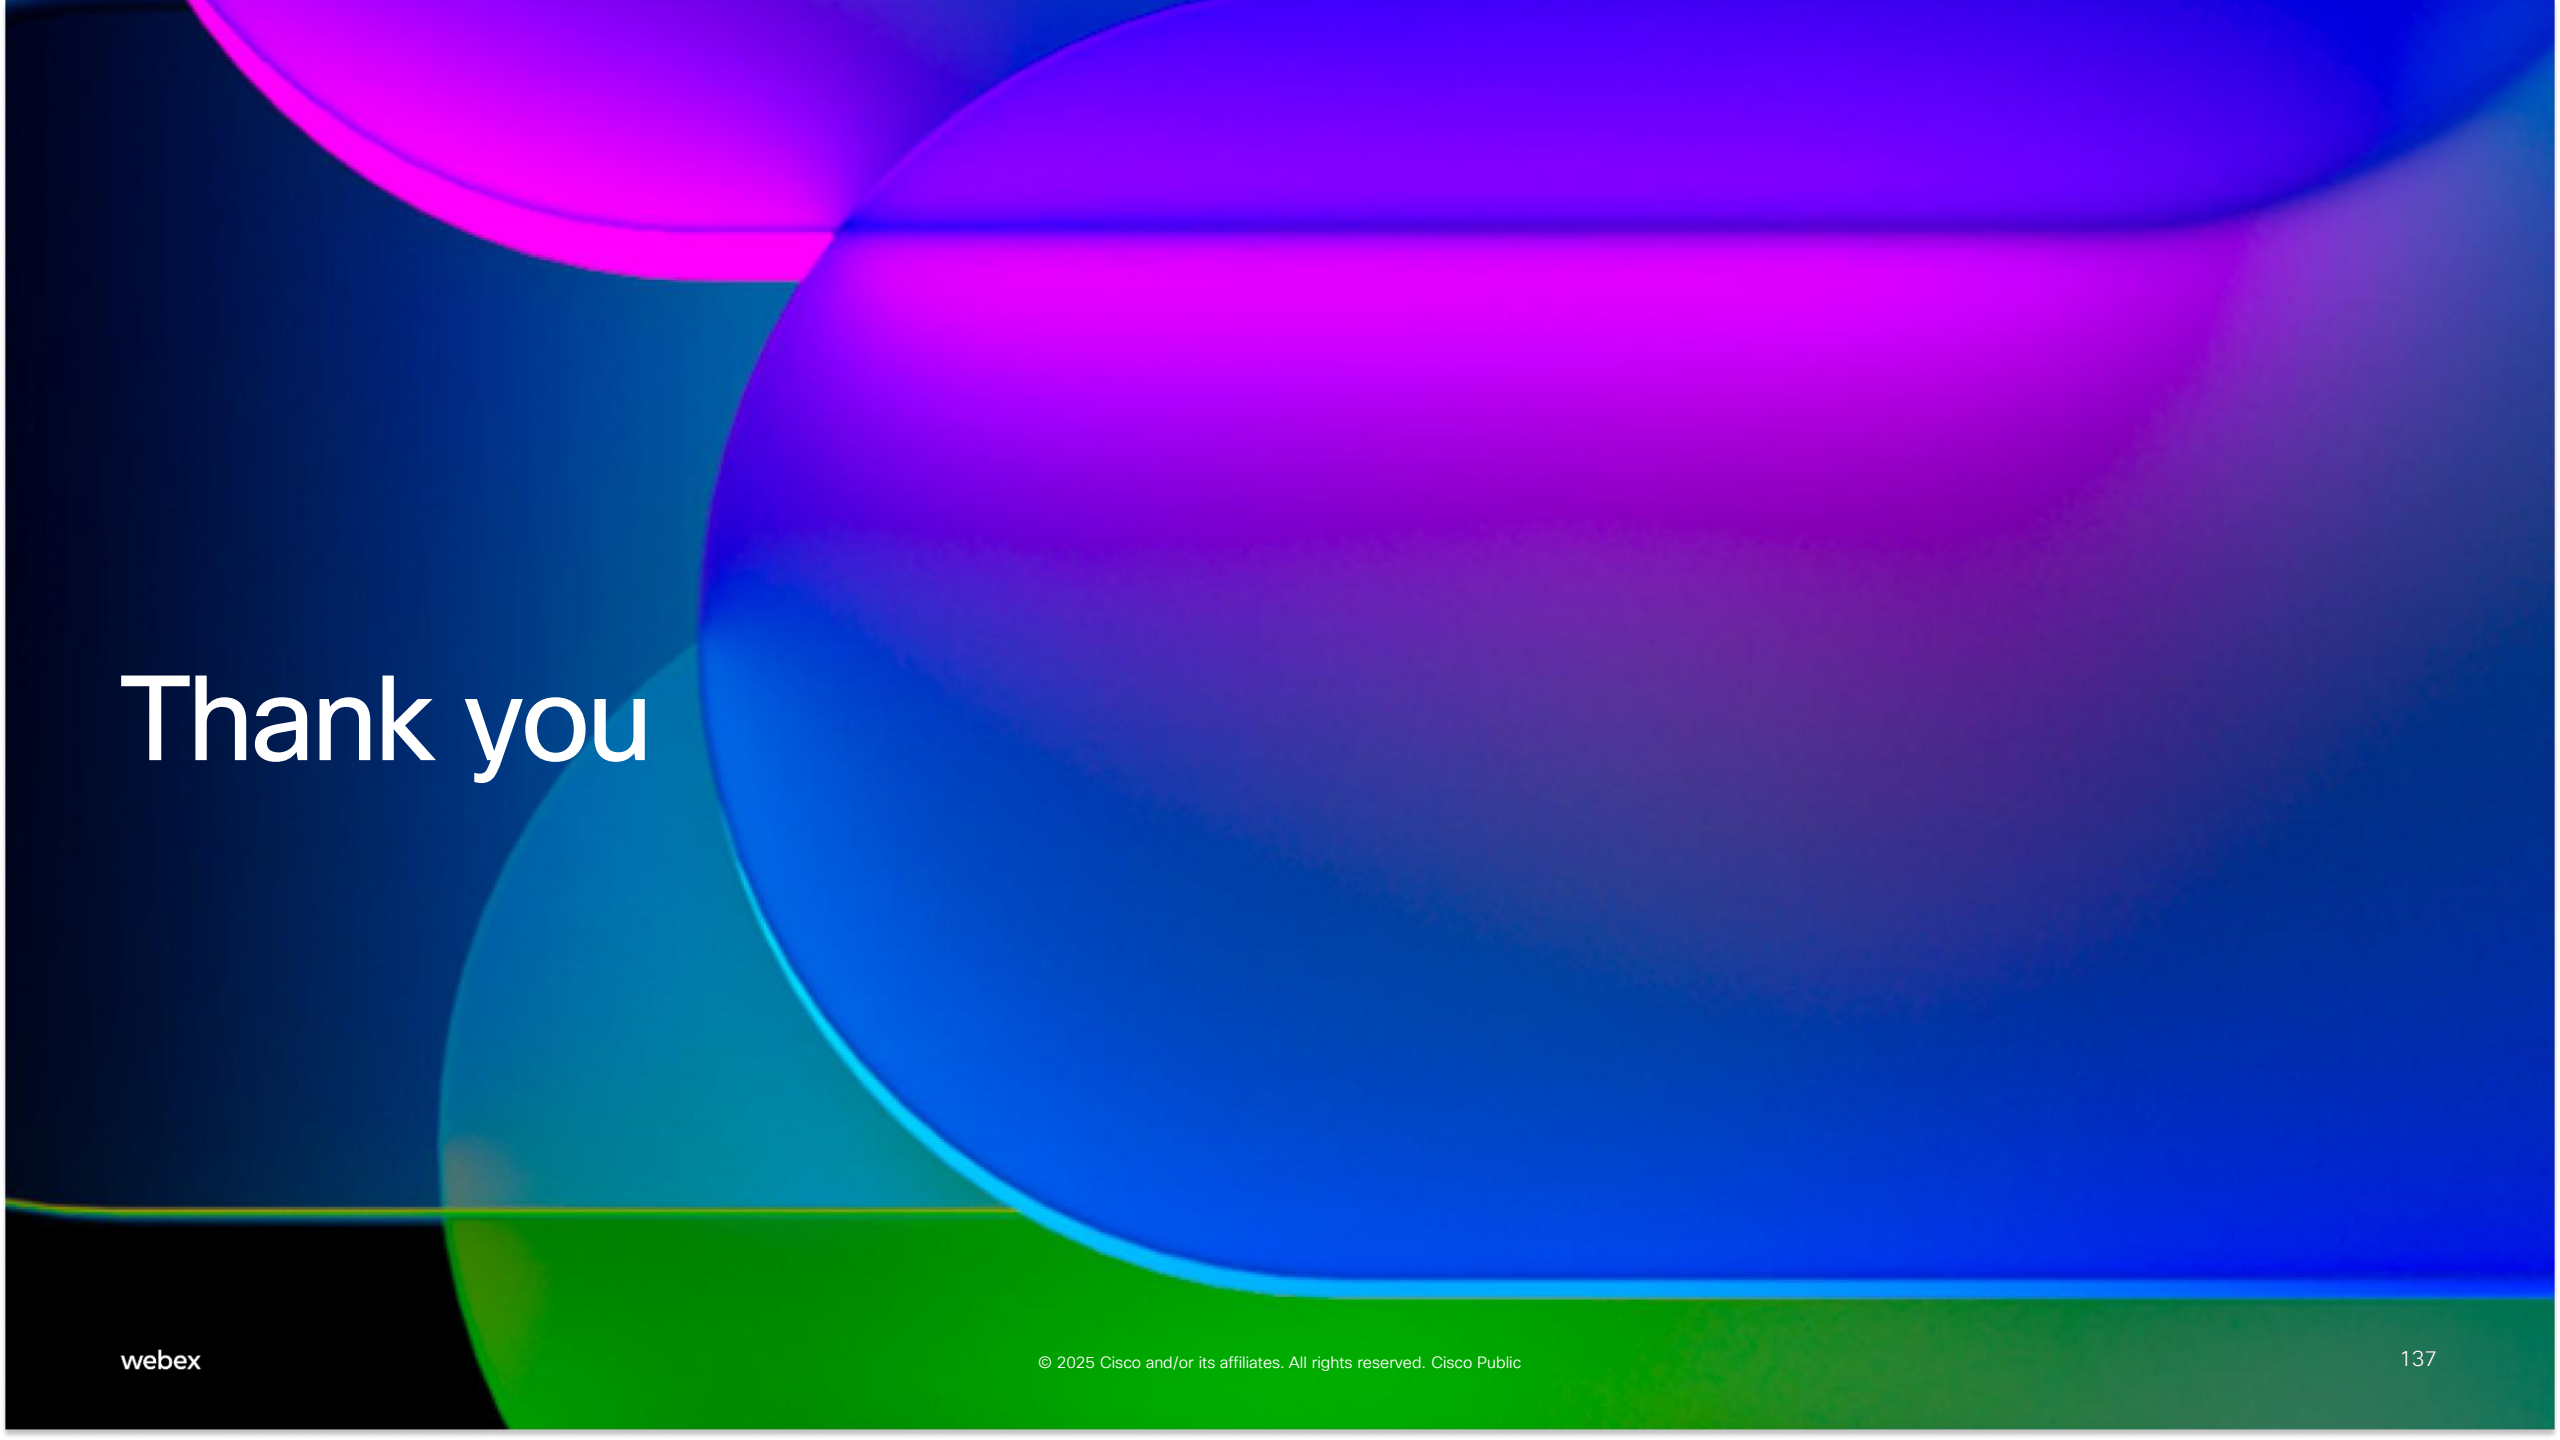

Thank you



webexone²⁵