C290b

14401

A11
Radio (18806)

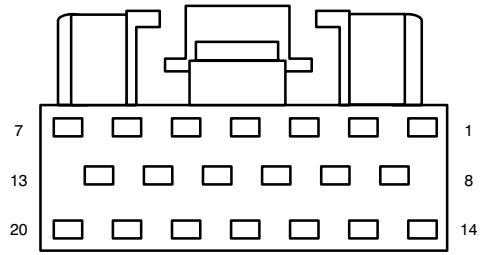

F20023

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	595 (LB/RD)	Steering wheel radio switch, Radio (18806)
15	–	not used
16	–	not used
17	690 (GY)	Radio (18806), to CD changer, Right +
18	799 (OG/BK)	Radio (18806), to CD changer, Right –
19	856 (VT)	Radio (18806), to CD changer, Left, +
20	798 (LG/RD)	Radio (18806), to CD changer, Left –

C290c

14401

A11
Radio (18806)

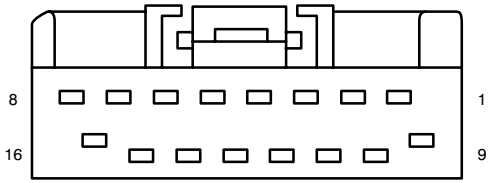

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Instrument illumination, feed
2	57 (BK)	Ground
3	33 (WH/PK)	switched power, to starter solenoid
4	651 (BK/YE)	Ground
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	828 (VT/LB)	Voltage supplied at all times (overload protected)
10	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground

C294a

14401

P76
Function selector
switch assembly



F03165

Pin	Circuit	Circuit function
1	436 (RD/LG)	Air temperature door variable resistor +
2	437 (YE/LG)	Air temperature door variable resistor, wiper
3	600 (DB)	Temperature blend door actuator (19E616), feed