-106

C1005

14K733

K37
High beam relay

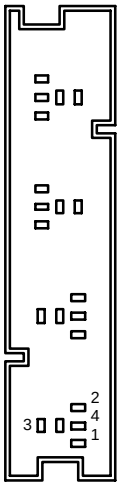

F20012

Pin	Circuit	Circuit Function
1	15S-LE12 (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected), switched
2	91-LE12 (BK/YE)	Ground
3	30-LE13 (RD)	Voltage supplied at all times (not overload protected)
4	–	not used
5	15S-DC26 (GN/BU) +	Voltage, ignition switch in Start or Run (not overload protected), switched
	15S-DC27 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched

C1006

14K733

K36
Low beam relay

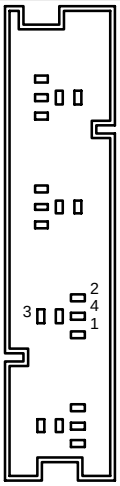

F20012

Pin	Circuit	Circuit Function
1	15S-LE19 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched
	15S-LD8 (GN/RD) +	Voltage, ignition switch in Start or Run (not overload protected), switched
	15S-LE19 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched
2	91-LE19 (BK/BU)	Ground
3	30-LE20 (RD)	Voltage supplied at all times (not overload protected)
	15S-DC16 (GN/BU) +	Battery voltage, hot in Start and Run only (not overload protected), switched
	15S-DC17 (GN/BU)	Battery voltage, hot in Start and Run only (not overload protected), switched
4	–	not used
5	15S-LE20 (GN/RD)	Voltage, ignition switch in Start or Run (not overload protected), switched
	15S-DC16 (GN/BU) +	Voltage, ignition switch in Start or Run (not overload protected), switched
	15S-DC17 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched
	30-LE20 (RD)	Battery voltage, hot at all times (not over-load protected)