C1010 (BN)

14401

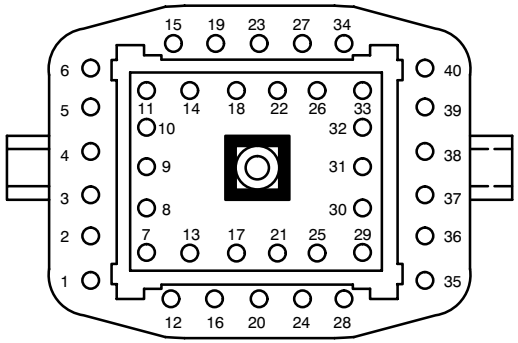

F40003

12A581

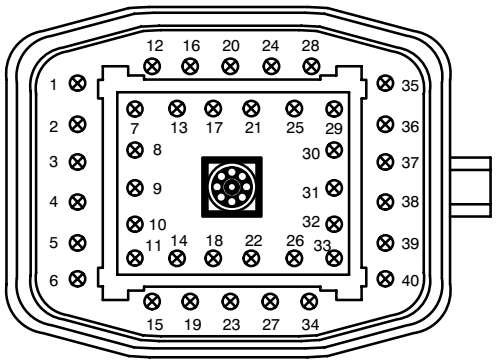

F40002

(1)	37 (YE)	(11)	295 (LB/PK)	(21)	637 (DB/WH)	(31)	151 (LB/BK)
(2)	671 (LB)	(12)	959 (GY)	(22)	348 (VT)	(32)	
(3)	50 (RD)	(13)	531 (DG/YE)	(23)	81 (RD/LG)	(33)	2 (WH/LB)
(4)	1050 (LG/VT)	(14)	10 (LG/RD)	(24)	1629 (PK/LG)	(34)	1093 (TN/RD)
(5)	170 (RD/LB)	(15)	679 (GY/BK)	(25)	160 (DB/WH)	(35)	364 (BK/LG)
(6)	185 (BK)	(16)	700 (WH/VT)	(26)	3 (LG/WH)	(36)	1052 (TN/BK)
(7)	647 (GY/LB)	(17)	53 (BK/LB)	(27)	1114 (BN/PK)	(37)	
(8)	646 (YE/WH)	(18)	810 (RD/LG)	(28)	1628 (WH/RD)	(38)	566 (DG)
(9)	686 (TN/RD)	(19)	512 (TN/LG)	(29)	570 (BK/WH)	(39)	12 (LG/BK)
(10)	1000 (RD/BK)	(20)	640 (RD/YE)	(30)	848 (DG/OG)	(40)	517 (BK/WH)

C1016

12A581

K163
PCM power relay



F05051

Pin	Circuit	Circuit function
86	20 (WH/LB)	Voltage supplied in Start and Run (overload protected)
87	1140 (VT)	PCM power relay, Switched, Power (Start or Run)
30	554 (YE/BK)	Voltage supplied at all times (overload protected)
85	57 (BK)	Ground
87a	–	not used

C1017a

12A581
14B060

K22
Starter relay (11450)



F01085

Pin	Circuit	Circuit function
1	1119 (RD)	Voltage supplied at all times (not overload protected)
	1118 (RD)	