C1117

14398

P52
Joint connector 1

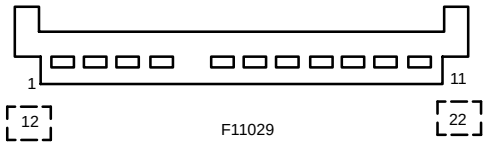

Late build

Pin	Circuit	Circuit function
1	–	not used
2	1139 (VT/YE)	Voltage supplied in Start and Run (overload protected)
3	1139 (VT/YE)	Voltage supplied in Start and Run (overload protected)
4	1139 (VT/YE)	Voltage supplied in Start and Run (overload protected)
5	–	not used
6	1138 (VT/WH)	Voltage supplied in Start and Run (overload protected)
7	1138 (VT/WH)	Voltage supplied in Start and Run (overload protected)
8	1138 (VT/WH)	Voltage supplied in Start and Run (overload protected)
9	729 (RD/WH)	Voltage supplied at all times (overload protected)
10	729 (RD/WH)	Voltage supplied at all times (overload protected)
11	729 (RD/WH)	Voltage supplied at all times (overload protected)
12	33 (WH/PK)	switched power, to starter solenoid
13	33 (WH/PK)	switched power, to starter solenoid
14	33 (WH/PK)	switched power, to starter solenoid
15	–	not used
16	–	not used
17	1138 (VT/WH)	Voltage supplied in Start and Run (overload protected)
18	1138 (VT/WH)	Voltage supplied in Start and Run (overload protected)
19	1138 (VT/WH)	Voltage supplied in Start and Run (overload protected)
20	729 (RD/WH)	Voltage supplied at all times (overload protected)
21	729 (RD/WH)	Voltage supplied at all times (overload protected)
22	729 (RD/WH)	Voltage supplied at all times (overload protected)

C1118

14398

P59
Joint connector 2

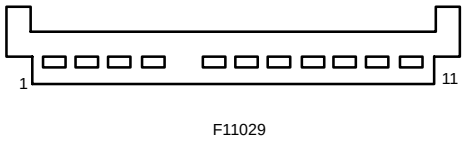

Pin	Circuit	Circuit function
1	–	not used
	1139 (VT/YE)	Voltage supplied in Start and Run (overload protected)
2	321 (GY/WH)	A/C clutch relay, switched output
	1139 (VT/YE)	Voltage supplied in Start and Run (overload protected)
3	321 (GY/WH)	A/C clutch relay, switched output
	1139 (VT/YE)	Voltage supplied in Start and Run (overload protected)
4	321 (GY/WH)	A/C clutch relay, switched output
	–	not used
5	–	not used
6	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
7	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
8	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
9	33 (WH/PK)	switched power, to starter solenoid
	321 (GY/WH)	A/C clutch relay, switched output
10	33 (WH/PK)	switched power, to starter solenoid
	321 (GY/WH)	A/C clutch relay, switched output
11	33 (WH/PK)	switched power, to starter solenoid
	321 (GY/WH)	A/C clutch relay, switched output