C270b (GY)

14401

Central Junction
Box (CJB) (14A068)

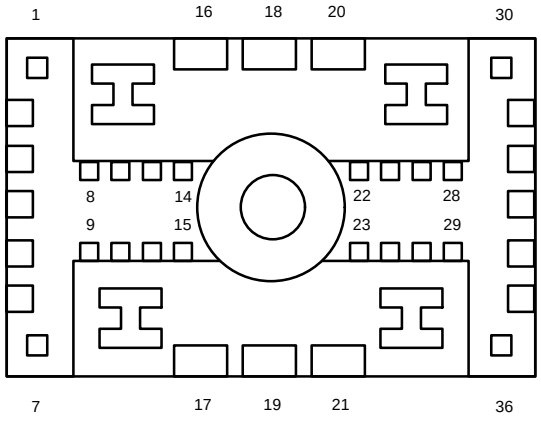

F36007

Pin	Circuit	Circuit function
1	1 (DB)	Horn relay, control
2	44 (LB)	Turn signal flasher, to turn signal switch
3	–	not used
4	275 (YE)	Blower motor relay, control
5	–	not used
6	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	59 (DG/VT)	Fused rear window defrost relay, switched power
12	–	not used
13	–	not used
14	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
15	385 (WH/RD)	Voltage supplied at all times (overload protected)
16	371 (PK/WH)	Blower motor relay, switched output
17	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
18	–	not used
19	40 (LB/WH)	Voltage supplied at all times (overload protected)

Pin	Circuit	Circuit function
20	687 (GY/YE)	Voltage in Run (overload protected)
21	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)
22	–	not used
23	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
24	705 (LG/OG)	Battery saver relay, switched power
25	1087 (OG)	Voltage in Run (overload protected)
26	1047 (LG/RD)	Voltage supplied at all times (overload protected)
27	–	not used
28	383 (RD/WH)	Emergency warning flasher, feed
29	298 (VT/OG)	Voltage in Run (overload protected)
30	–	not used
31	14 (BN)	Power, Exterior lamps
32	15 (RD/YE)	Low beam, Ground
33	32 (RD/LB)	Voltage supplied in Start (overload protected)
34	1039 (BK/YE)	Voltage in Run (overload protected)
35	109 (VT/WH)	Voltage supplied at all times (overload protected)
36	–	not used