C270b

14290

P91
Central Junction
Box (CJB) (14A068)

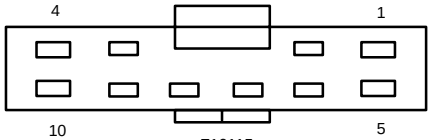

F10115

Pin	Circuit	Circuit function
1	785 (BK/LG)	Voltage supplied at all times (overload protected)
2	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)
3	–	not used
4	1052 (TN/BK)	Fused battery feed, to Central Junction Box (CJB)
5	37 (YE)	Voltage supplied at all times (overload protected)
6	14 (BN)	Power, Exterior lamps
7	–	not used
8	–	not used
9	140 (BK/PK)	Reversing lamps, control
10	950 (WH/BK)	Voltage supplied in Start and Run (overload protected)

C270c

14401

P91
Central Junction
Box (CJB) (14A068)

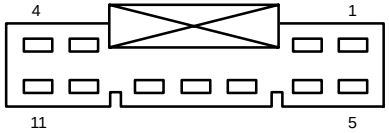

F11025

Pin	Circuit	Circuit function
1	40 (LB/WH)	Voltage in Run or Accessory (overload protected)
2	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
3	704 (DG/LG)	Voltage supplied in Start and Run (overload protected)
4	41 (BK/LB)	Voltage supplied in Start and Run (overload protected)
5	–	not used
6	297 (BK/LG)	Voltage in Run or Accessory (overload protected)
7	950 (WH/BK)	Voltage supplied in Start and Run (overload protected)
8	296 WH/VT)	Voltage supplied in Start and Run (overload protected)
9	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
10	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
11	8 (OG/YE)	Voltage supplied in Start and Run (overload protected)