C270f (WH)

14401

Central Junction
Box (CJB) (14A068)

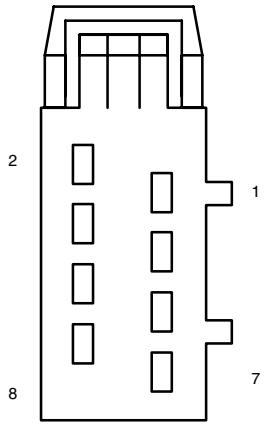

F08112

Pin	Circuit	Circuit function
1	705 (LG/OG)	Battery saver relay, switched power
2	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
3	10 (LG/RD)	Voltage supplied at all times (overload protected)
4	195 (TN/WH)	Voltage supplied at all times (overload protected)
5	–	not used
6	57 (BK)	Ground
7	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
8	3049 (BK/LG)	Voltage supplied at all times (overload protected)

C270g (BK)

14401

Central Junction
Box (CJB) (14A068)



F06291

Pin	Circuit	Circuit function
1	50 (RD)	Voltage supplied at all times (overload protected)
2	399 (BN/YE)	Front blower motor relay, control
3	964 (DB/LG)	Battery voltage, hot in Start and Run only
4	1050 (LG/VT)	Voltage supplied at all times (overload protected)
5	1943 (RD/WH)	Voltage supplied at all times (overload protected)
6	2116 (YE)	Voltage supplied at all times (overload protected)