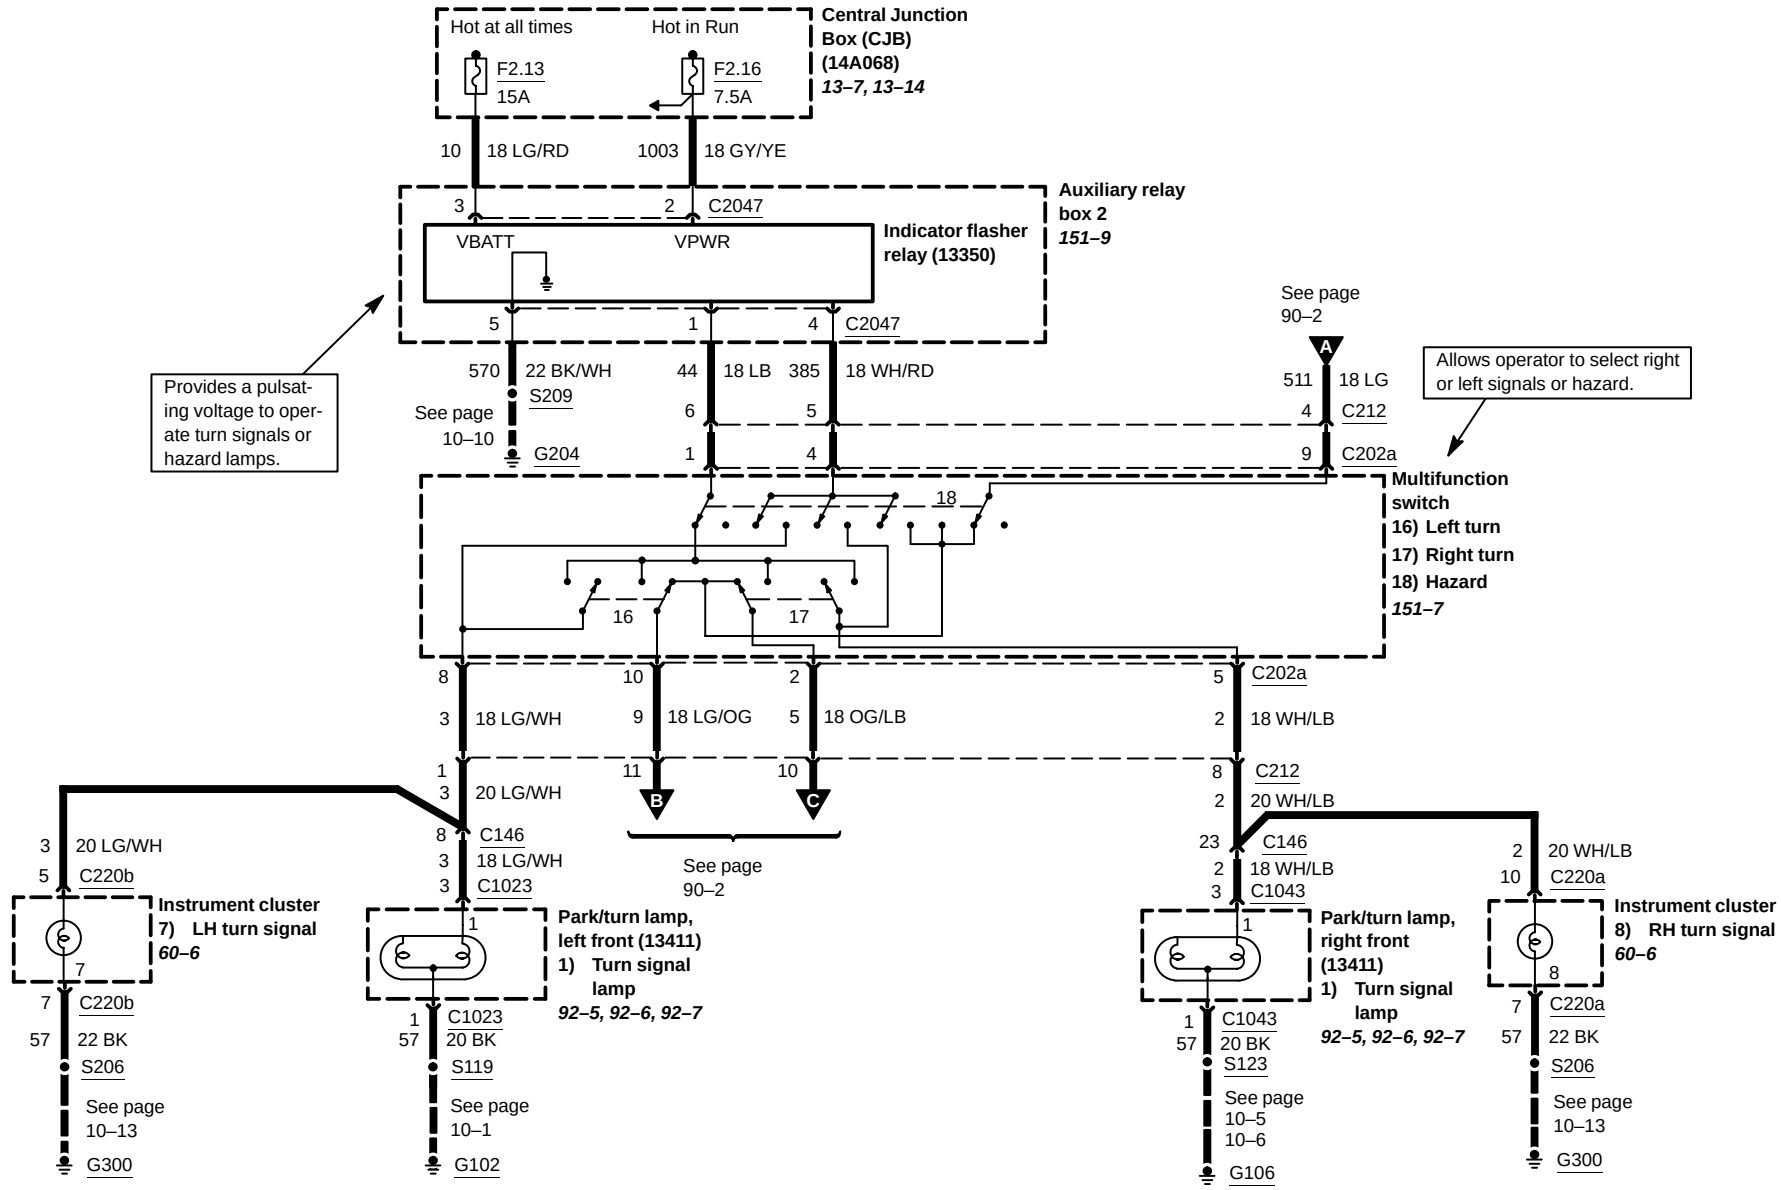
Hot at all times
Hot in Run
F2.13
15A
F2.16
7.5A
Central Junction Box (CJB) (14A068) 13–7, 13–14
10 18 LG/RD
1003 18 GY/YE
3
2 C2047
VBATT
VPWR
Indicator flasher relay (13350)
Auxiliary relay box 2 151–9
5
1
4 C2047
570 22 BK/WH
S209
See page 10–10
G204
44 18 LB
385 18 WH/RD
6
5
1
4
Provides a pulsating voltage to operate turn signals or hazard lamps.
See page 90–2
A
511 18 LG
4 C212
9 C202a
Allows operator to select right or left signals or hazard.
Multifunction switch
16) Left turn
17) Right turn
18) Hazard
151–7
18
16
17
8
3 18 LG/WH
10
9 18 LG/OG
2
5 18 OG/LB
5 C202a
2 18 WH/LB
1
3 20 LG/WH
11
B
10
C
8 C212
2 20 WH/LB
See page 90–2
3 20 LG/WH
5 C220b
8 C146
3 18 LG/WH
3 C1023
23 C146
2 18 WH/LB
3 C1043
2 20 WH/LB
10 C220a
Instrument cluster 7) LH turn signal 60–6
7
7 C220b
57 22 BK
S206
See page 10–13
G300
1
Park/turn lamp, left front (13411) 1) Turn signal lamp 92–5, 92–6, 92–7
1 C1023
57 20 BK
S119
See page 10–1
G102
1
Park/turn lamp, right front (13411) 1) Turn signal lamp 92–5, 92–6, 92–7
1 C1043
57 20 BK
S123
See page 10–5 10–6
G106
Instrument cluster 8) RH turn signal 60–6
8
7 C220a
57 22 BK
S206
See page 10–13
G300