C3137 (BK)

14A655



F04263

(1) 57 (BK)
(2) –

14406



F04251

(3) 787 (PK/BK)
(4) –

C3139 (BK)

14A200



F02088

(1) 57 (BK)
(2) 511 (LG)

13A427



F02073

(1) 511 (LG)
(2) 511 (LG)

C3138 (BK)

VJ9241

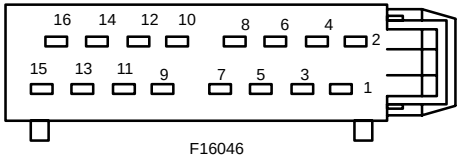

F16046

(1) 95 (DG)
(2) 105 (BK/LG)
(3) 48 (NA)
(4) 115 (VT)
(5) 125 (LG/RD)
(6) 135 (GY)
(7) 145 (OG/BK)
(8) 48 (NA)
(9) 57 (BK)
(10) 48 (NA)
(11) 155 (RD)
(12) 165 (WH)
(13) 185 (YE)
(14) 175 (OG)
(15) 18 (BK)
(16) 16 (YE/WH)

14A200

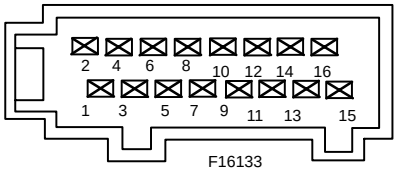

F16133

(1) 1540 (DG)
(2) 1541 (DB)
(3) 48 (BK)
(4) –
(5) –
(6) –
(7) –
(8) –
(9) 694 (BK/LG)
(10) 48 (BK)
(11) 1559 (RD)
(12) 1569 (WH)
(13) 1561 (OG)
(14) 1562 (YE)
(15) 137 (YE/BK)
(16) 729 (RD/WH)

C3140a (BK)

14A200

Remote keyless entry module (15K602)



F13015

Pin	Circuit	Circuit function
8	875 (BK/LB)	Ground
9	14 (BN)	Power, Exterior lamps
10	–	not used
11	–	not used
12	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)
13	1 (DB)	Horn relay, control
14	–	not used
21	875 (BK/LB)	Ground
22	517 (BK/WH)	Voltage supplied at all times (overload protected)
23	875 (BK/LB)	Ground
24	120 (PK/LG)	Door unlock, switch, input
25	119 (PK/YE)	Door lock switch, input
26	628 (WH)	Side door, control