C290b (GY)

14401

Radio (19B132)

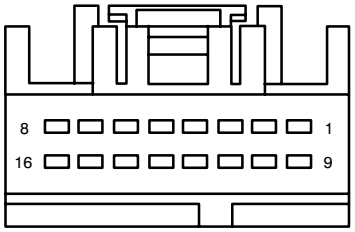

F16151

Pin	Circuit	Circuit function
1	856 (VT)	Radio (18806) to CD changer Left +
2	798 (LG/RD)	Radio (18806) to CD changer Left –
3	48	Shield
4	–	not used
5	–	not used
6	1068 (LG/BK)	Audio System ON (ASYSON)
7	832 (LB/PK)	Audio corporate protocol A
8	833 (TN)	Audio corporate protocol B
9	690 (GY)	Radio (18806) to CD changer Right +
10	799 (OG/BK)	Radio (18806) to CD changer Right –
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used

C290c (GY)

14401

Radio (19B132)



F24021

Pin	Circuit	Circuit function
1	828 (VT/LB)	Voltage supplied at all times (overload protected)
2	137 (YE/BK)	Voltage in Run or Accessory (overload protected)
3	19 (LB/RD)	Instrument illumination, feed
4	57 (BK)	Ground
5	–	not used
6	651 (BK/YE)	Clock (15000), signal
7	–	not used
8	804 (OG/LG)	Speaker, left front (18808) +
9	800 (GY/LB)	Speaker, left rear (18808) +
10	802 (OG/RD)	Speaker, right rear (18808) +
11	805 (WH/LG)	Speaker, right front (18808) +
12	811 (DG/OG)	Speaker, right front (18808) –
13	694 (BK/LG)	Ground
14	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
15	823 (LG)	Voltage supplied in Start (overload protected)
16	–	not used
17	–	not used
18	595 (LB/RD)	Steering wheel radio switch, Radio (18806)
19	–	not used
20	–	not used
21	813 (LB/WH)	Speaker, left front (18808) –
22	801 (TN/YE)	Speaker, left rear (18808) –
23	803 (BN/PK)	Speaker, right rear (18808) –
24	694 (BK/LG)	Ground