C3008d (GY)

14A488

Central security module

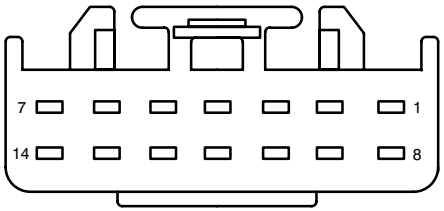

F14023

Pin	Circuit	Circuit function
1	117 (PK/BK)	Door lock/unlock relay, switched output, Lock
2	120 (PK/LG)	Door unlock, output
3	119 (PK/YE)	Door lock, output
4	765 (YE/BK)	Door ajar switch, left front
5	761 (GY/RD)	Door ajar switch, right front
6	760 (PK/LB)	Door ajar switch, right rear
7	163 (RD/OG)	Driver door unlock relay, switched power
8	118 (PK/OG)	Door lock/unlock relay, switched output, Unlock
9	–	not used
10	–	not used
11	759 (LG/YE)	Door ajar switch, left rear
12	700 (WH/VT)	Liftgate ajar switch
13	25 (DG/VT)	Anti–theft, switch, disarm
14	1205 (BK)	Ground

C3008e (GN)

14A488

Central security module

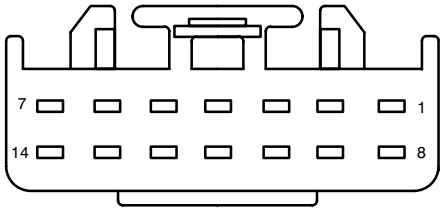

F14023

Pin	Circuit	Circuit function
1	456 (DG/OG)	Voltage supplied at all times (overload protected)
2	14 (BN)	Power, Exterior lamps
3	645 (WH/LB)	Voltage supplied at all times (overload protected)
4	218 (WH/VT)	Sunload sensor (19E663), input
5	1399 (DB/WH)	Autolamp On/Off signal
6	460 (YE/LB)	Horn relay, control
7	221 (OG/WH)	Autolamp relay, switched output
8	195 (TN/WH)	Voltage supplied at all times (overload protected)
9	23 (TN/LG)	Anti–theft, switch sense
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	196 (DB/OG)	Voltage supplied at all times (overload protected)