*with EATC

C289 (WH)

14401

M256
Temperature blend
door actuator
(19E616)



F08059

Pin	Circuit	Circuit function
1	246 (VT)	position sense
2	–	not used
3	437 (YE/LG)	Air temperature door variable resistor, wiper
4	436 (RD/LG)	Air temperature door variable resistor +
5	243 (LG/OG)	Temperature blend door actuator (19E616), feed
6	438 (RD/WH)	Air temperature door variable resistor –
	*247 (WH/YE)	Blend door actuator, Sensor, return
7	295 (LB/PK)	Voltage in Run (overload protected)
	*250 (OG)	Blend door actuator, control
8	57 (BK)	Ground
	*249 (DB/LG)	Blend door actuator, control

C290a

14401
14588

A11
Radio (18806)

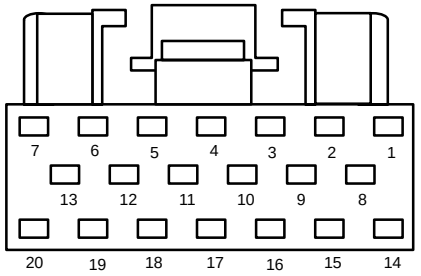

F20023

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	48	Shield
17	690 (GY)	Radio (18806), to CD changer, Right +
18	799 (OG/BK)	Radio (18806), to CD changer, Right –
19	856 (VT)	Radio (18806), to CD changer, Left +
20	798 (LG/RD)	Radio (18806), to CD changer, Left –