

Лабораторная работа 5

Администрирование локальных сетей

Ромицына А.Р.

Российский университет дружбы народов, Москва, Россия

Информация

- Ромицына Анастасия Романовна
- Российский университет дружбы народов
- 1132236132@rudn.ru

Получить основные навыки по настройке VLAN на коммутаторах

Выполнение лабораторной работы

VLAN-порт msk-donskaya-arromichina-sw-1

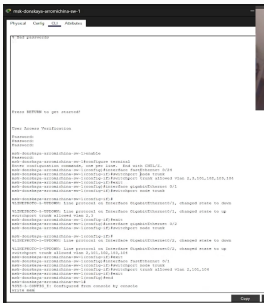


Рис. 1: Настройка VLAN-портов на коммутаторе msk-donskaya-arromichina-sw-1

VLAN-порт msk-donskaya-arromichina-sw-2

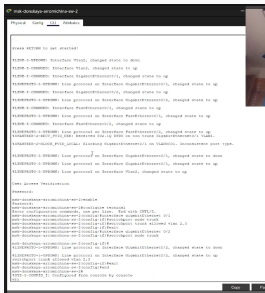


Рис. 2: Настройка VLAN-портов на коммутаторе msk-donskaya-arromichina-sw-2

VLAN-порт msk-donskaya-arromichina-sw-3

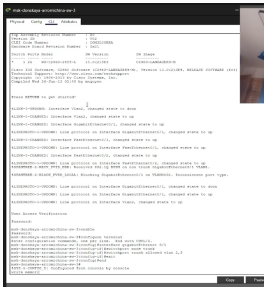


Рис. 3: Настройка VLAN-портов на коммутаторе msk-donskaya-arromichina-sw-3

VLAN-порт msk-donskaya-arromichina-sw-4

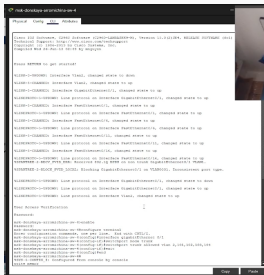


Рис. 4: Настройка VLAN-портов на коммутаторе msk-donskaya-arromichina-sw-4

VLAN-порт msk-pavlovskaya-arromichina-sw-1

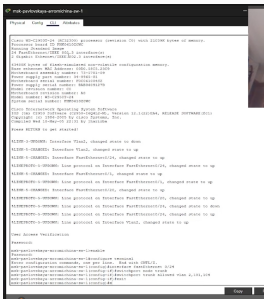


Рис. 5: Настройка VLAN-портов на коммутаторе msk-pavlovskaya-arromichina-sw-1

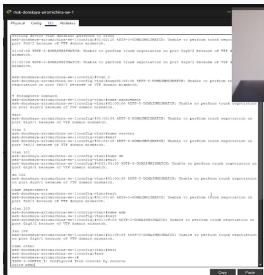


Рис. 6: Настройка коммутатора msk-donskaya-arromichina-sw-1 как VTP-сервера, добавление номеров и названий VLAN



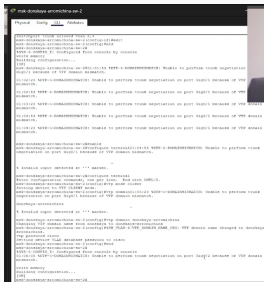


Рис. 7: Настройка коммутатора msk-donskaya-arromichina-sw-2 как VTP-сервера, добавление номеров и названий VLAN





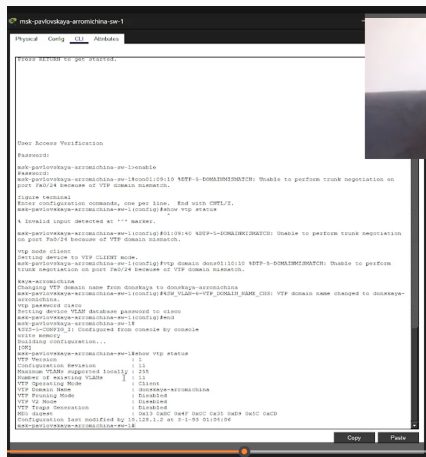

```
msk-pavlovskaya-arromichina-sw-1
Physical Config CLI Attributes

FROM RETURN TO GET STATUS.

User Access Verification
Password:
msk-pavlovskaya-arromichina-sw-1#enable
msk-pavlovskaya-arromichina-sw-1#config
msk-pavlovskaya-arromichina-sw-1(config)#show vtp status

% Invalid input detected at '^' marker.

msk-pavlovskaya-arromichina-sw-1(config)#vtp domain dmsk10:10 VTP-S-DOMAINMISMATCH: Unable to perform trunk negotiation on port Fa0/24 because of VTP domain mismatch.

vtp mode client
Switching device to VTP CLIENT mode.
msk-pavlovskaya-arromichina-sw-1(config)#vtp domain dmsk10:10 VTP-S-DOMAINMISMATCH: Unable to perform trunk negotiation on port Fa0/24 because of VTP domain mismatch.

msk-pavlovskaya-arromichina-sw-1(config)#vtp domain dmsk10:10 VTP-S-DOMAINMISMATCH: Unable to perform trunk negotiation on port Fa0/24 because of VTP domain mismatch.

vtp mode client
Switching device to VTP CLIENT mode.
msk-pavlovskaya-arromichina-sw-1(config)#vtp domain dmsk10:10 VTP-S-DOMAINMISMATCH: Unable to perform trunk negotiation on port Fa0/24 because of VTP domain mismatch.

msk-pavlovskaya-arromichina-sw-1#show vtp status
VTP Version                : 2
Configuration Revision      : 11
Maximum VLANs supported locally : 255
Number of existing VLANs    : 11
VTP Operating Mode          : CLIENT
VTP Domain Name             : dmsk10:10
VTP Pruning Mode            : Disabled
VTP V2 Mode                 : Disabled
VTP Trunk Negotiation        : Disabled
MD5 Hierarchy              : Disabled
Configuration last modified by 10.128.1.2 at 3-1-93 01:04:06
msk-pavlovskaya-arromichina-sw-1#
```

Рис. 10: Настройка коммутатора msk-pavlovskaya-arromichina-sw-1 как VTP-сервера, добавление номеров и названий VLAN

Проверка статуса

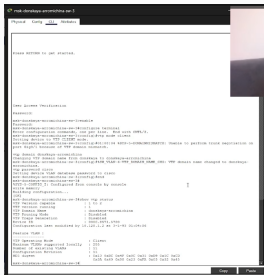


Рис. 11: Проверка статуса msk-donskaya-arromichina-sw-3

Проверка статуса

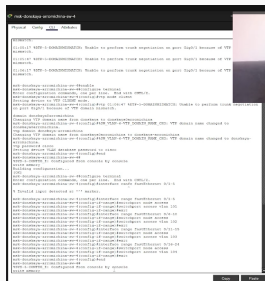


Рис. 12: Проверка статуса msk-donskaya-arromichina-sw-4

Проверка статуса

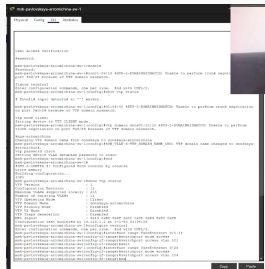


Рис. 13: Проверка статуса msk-pavlovskaya-arromichina-sw-1

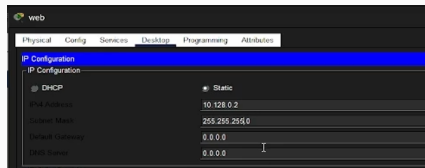


Рис. 14: Настройка IP адреса web

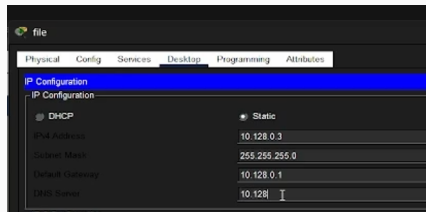


Рис. 15: Настройка IP адреса file

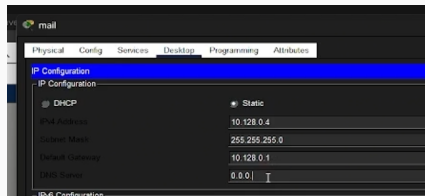


Рис. 16: Настройка IP адреса mail

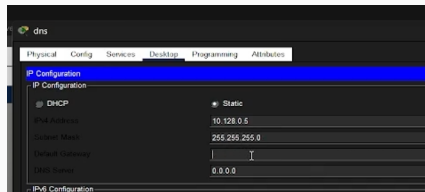


Рис. 17: Настройка IP адреса dns

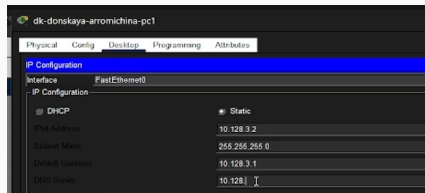


Рис. 18: Настройка IP адреса dk-pc-1

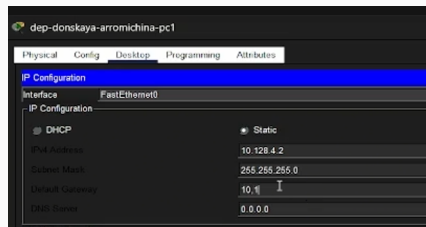


Рис. 19: Настройка IP адреса dep-pc-1

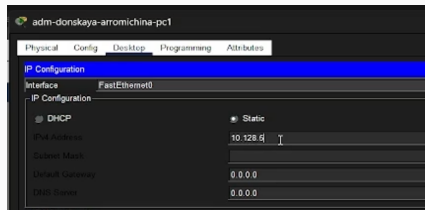


Рис. 20: Настройка IP адреса adm-pc-1

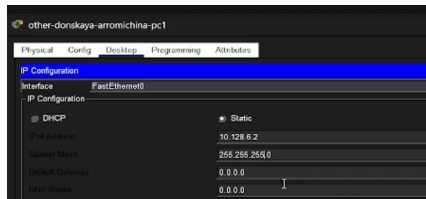


Рис. 21: Настройка IP адреса other-pc-1

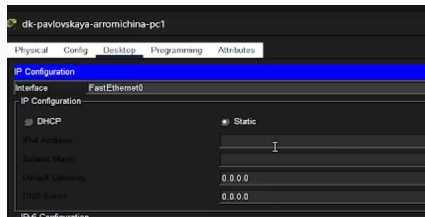


Рис. 22: Настройка IP адреса dk-pavlovskaya-pc-1


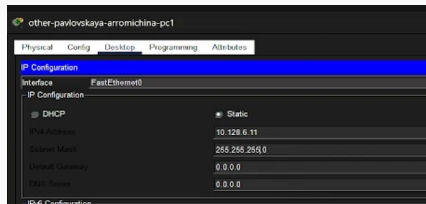


Рис. 23: Настройка IP адреса other-pavlovskaya-pc-1

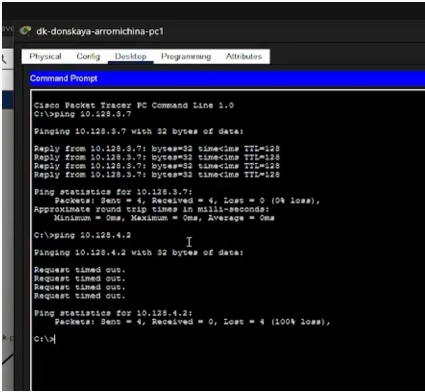

The screenshot shows a Cisco Packet Tracer interface with a Command Prompt window open for PC 'dk-donskaya-aromichina-pc1'. The window has tabs for Physical, Config, Desktop, Programming, and Attributes. The Command Prompt shows the following commands and output:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.128.3.7

Pinging 10.128.3.7 with 32 bytes of data:

Reply from 10.128.3.7: bytes=32 time=1ms TTL=128
Reply from 10.128.3.7: bytes=32 time=1ms TTL=128
Reply from 10.128.3.7: bytes=32 time=1ms TTL=128
Reply from 10.128.3.7: bytes=32 time=1ms TTL=128

Ping statistics for 10.128.3.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 10.128.4.2

Pinging 10.128.4.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.128.4.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Рис. 24: Проверка соединения

Выводы

Мы смогли получить основные навыки по настройке VLAN на коммутаторах
...