


INSTALLATION REQUIREMENTS PER USPS STD-4C

- 1. AT LEAST ONE CUSTOMER MAILBOX COMPARTMENT SHALL BE POSITIONED LESS THAN 48" ABOVE FINISHED FLOOR (AFF).
- 2. NO PARCEL LOCKER COMPARTMENT (INTERIOR BOTTOM SHELF) SHALL BE POSITIONED LESS THAN 15" AFF.
- 3. NO CUSTOMER MAILBOX LOCK SHALL BE LOCATED MORE THAN 67" AFF.
- 4. NO CUSTOMER MAILBOX COMPARTMENT (INTERIOR BOTTOM SHELF) SHALL BE POSITIONED LESS THAN 28" AFF.

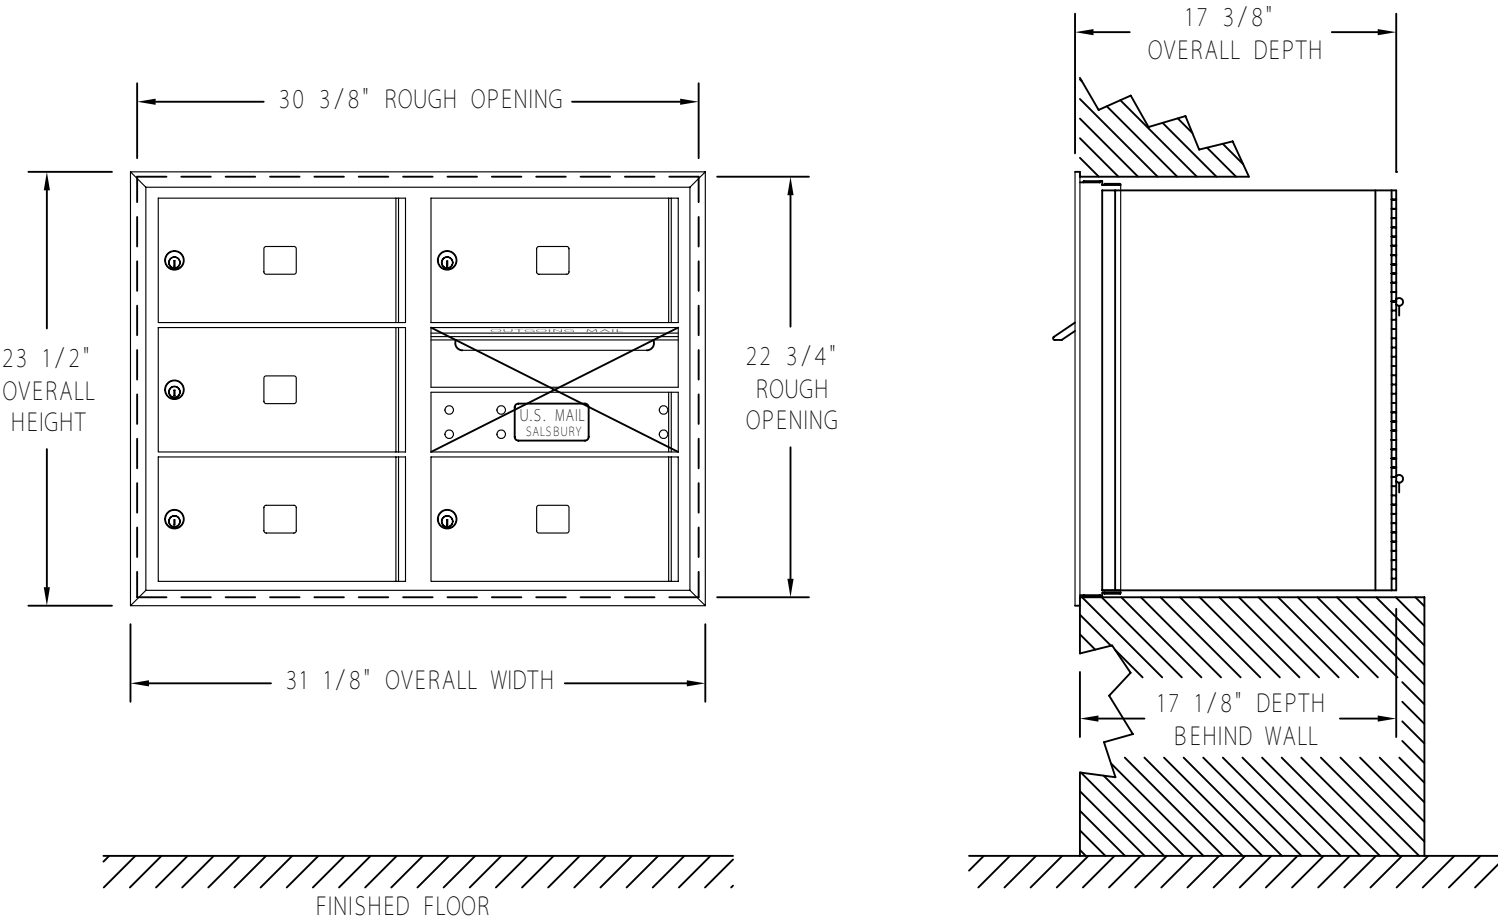

| | | | | |
|-------------------------|--|---|--|---------------------|
| DRAWN WCL | | 4C STANDARD HORIZONTAL MAILBOXES 3700 SERIES REAR LOADING AVAILABLE FOR USPS ACCESS OR PRIVATE ACCESS | (5) MB2 MAILBOXES (1) OM2 OUTGOING MAIL COMPARTMENT | MODEL 3706D - 05 |
| DATE 5/6/2013 | | | | DRAWING NO. |
| CAD FILE SCALE 1 : 1 | | | | CAD_3706D-05RL |