



versatile™ 4C Pedetal Mount Mailbox, 4C16D-29-P

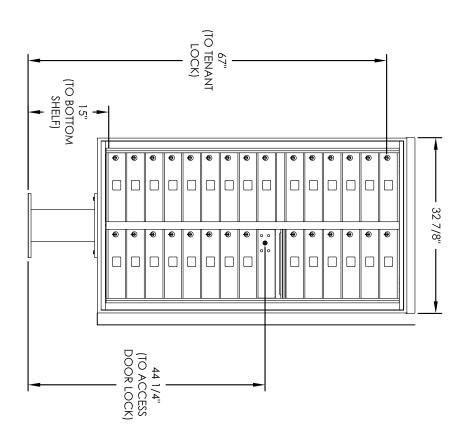

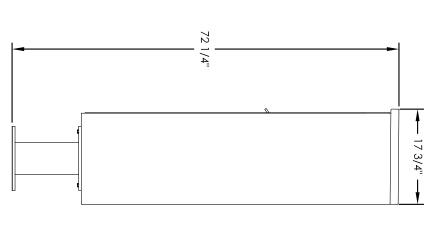





PEDESTAL DETAIL

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	29
ITGOING MAIL	ОМ1	3" H x 12" W x 15" D	1

PRODUCT SERIES: VERSATILETM 4C PEDESTAL MOUNT MAILBOX

	•		
4C16D-29-PCS	DRAWING NUMBER	SCALE NONE	MODEL4C16D-29-P REV
<i></i>		LAS	REV
	DRAWN BY	LAST REV DATE	D

- This module does NOT meet USPS STD-4C installation specification requirements as shown below:
 a. At least one customer compartment shall be positioned less than 48" above finished floor
- b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 c. No patron (tenant) lock shall be positioned more than 67" AFF.
 d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- This 4C mailbox is to be used for private applications.

ωΝ

The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) - 1%".