



**Generation Interconnection
System Impact Study Report
for
Queue Project AF1-167
WEST FREEDOM-C&K COAL 25 KV
8.1 MW Capacity / 13.51 MW Energy**

August 2020

Table of Contents

1	Introduction.....	4
2	Preface.....	4
3	General	5
4	Point of Interconnection.....	5
5	Cost Summary	5
6	Transmission Owner Scope of Work	7
7	Schedule.....	7
8	Transmission Owner Analysis.....	7
8.1	Transmission Owner Identified Network Impacts to Distribution Facilities.....	7
8.2	Transmission Owner Identified Network Impacts to Sub-Regional Facilities	8
8.3	System Reinforcements on Distribution Facilities.....	8
8.4	System Reinforcements on Sub-Regional Facilities.....	8
9	Interconnection Customer Requirements.....	8
9.1	Compliance Issues and Interconnection Customer Requirements	8
9.2	Power Factor Requirements.....	9
10	Revenue Metering and SCADA Requirements	9
10.1	PJM Requirements	9
10.2	Meteorological Data Reporting Requirements	9
10.3	Interconnected Transmission Owner Requirements.....	10
11	Summer Peak Analysis	11
11.1	Generation Deliverability	11
11.2	Multiple Facility Contingency	11
11.3	Contribution to Previously Identified Overloads.....	11
11.4	Steady-State Voltage Requirements	11
11.5	Potential Congestion due to Local Energy Deliverability.....	11
11.6	System Reinforcements.....	12
11.7	Queue Dependencies	12
11.8	Contingency Descriptions.....	12
12	Light Load Analysis	13
13	Short Circuit Analysis.....	14
13.1	System Reinforcements - Short Circuit.....	14

14	Stability and Reactive Power	15
15	Affected Systems	16
15.1	NYISO	16
16	Attachment 1: One Line Diagram	17

1 Introduction

This System Impact Study has been prepared in accordance with the PJM Open Access Transmission Tariff, 205, as well as the System Impact Study Agreement between the Interconnection Customer (IC), and PJM Interconnection, LLC (PJM), Transmission Provider (TP). The Interconnected Transmission Owner (ITO) is West Penn Power Company (WPP) (A part of APS).

2 Preface

The intent of the System Impact Study is to determine a plan, with approximate cost and construction time estimates, to connect the subject generation interconnection project to the PJM network at a location specified by the Interconnection Customer. As a requirement for interconnection, the Interconnection Customer may be responsible for the cost of constructing: Network Upgrades, which are facility additions, or upgrades to existing facilities, that are needed to maintain the reliability of the PJM system. All facilities required for interconnection of a generation interconnection project must be designed to meet the technical specifications (on PJM web site) for the appropriate transmission owner.

In some instances an Interconnection Customer may not be responsible for 100% of the identified network upgrade cost because other transmission network uses, e.g. another generation interconnection or merchant transmission upgrade, may also contribute to the need for the same network reinforcement. The possibility of sharing the reinforcement costs with other projects may be identified in the Feasibility Study, but the actual allocation will be deferred until the System Impact Study is performed.

The System Impact Study estimates do not include the feasibility, cost, or time required to obtain property rights and permits for construction of the required facilities. The project developer is responsible for the right of way, real estate, and construction permit issues. For properties currently owned by Transmission Owners, the costs may be included in the study.

The Interconnection Customer seeking to interconnect a wind or solar generation facility shall maintain meteorological data facilities as well as provide that meteorological data which is required per Schedule H to the Interconnection Service Agreement and Section 8 of Manual 14D.

3 General

The Interconnection Customer (IC), has proposed a Solar generating facility located in Clarion County, Pennsylvania. The installed facilities will have a total capability of 13.51 MW with 8.1 MW of this output being recognized by PJM as Capacity. The proposed in-service date for this project is June 01, 2022. This study does not imply a TO commitment to this in-service date.

Queue Number	AF1-167
Project Name	WEST FREEDOM-C&K COAL 25 KV
State	Pennsylvania
County	Clarion
Transmission Owner	West Penn Power (Part of APS)
MFO	13.5
MWE	13.51
MWC	8.1
Fuel	Solar
Basecase Study Year	2023

Any new service customers who can feasibly be commercially operable prior to June 1st of the basecase study year are required to request interim deliverability analysis.

4 Point of Interconnection

The AF1-167 project will interconnect with the West Penn Power (“WPP”) system. The interconnection of the project will be accomplished by tapping the West Freedom – C&K Coal 25kV Line and constructing a one span tap. The transmission line tap will be located approximately 5.7 miles from West Freedom Substation and 1.75 miles from C&K Coal Substation. The IC will be responsible for acquiring all easements, properties, and permits that may be required to construct both the new interconnection line tap and the associated attachment facilities. The IC will also be responsible for the rough grade of the property and an access road to the proposed site. The project will also require non-direct connection upgrades at Burma Substation.

Attachment 1 shows a one-line diagram of the proposed primary direct connection facilities for the AF1-167 generation project to connect to the FirstEnergy (“FE”) transmission system. IC will be responsible for constructing all of the facilities on its side of the POI, including the Attachment facilities which connect the generator to the FE transmission system.

5 Cost Summary

The AF1-167 project will be responsible for the following costs:

Description	Total Cost
Total Physical Interconnection Costs	\$ 412,067
Allocation towards System Network Upgrade Costs * (TO identified- Note 3 applies)	\$ 780,000
Allocation towards System Network Upgrade Costs * (PJM identified – Notes 1 and 2 apply)	\$ 0
Total Costs	\$ 1,192,067

*As your project progresses through the study process and other projects modify their request or withdraw, then your cost allocation could change.

This cost excludes a Federal Income Tax Gross Up charges. This tax may or may not be charged based on whether this project meets the eligibility requirements of IRS Notice 88-129. If at a future date it is determined that the Federal Income Tax Gross charge is required, the Transmission Owner shall be reimbursed by the Interconnection Customer for such taxes.

Note 1: PJM Open Access Transmission Tariff (OATT) section 217.3A outline cost allocation rules. The rules are further clarified in PJM Manual 14A Attachment B. The allocation of costs for a network upgrade will start with the first Queue project to cause the need for the upgrade. Later queue projects will receive cost allocation contingent on their contribution to the violation and are allocated to the queues that have not closed less than 5 years following the execution of the first Interconnection Service Agreement which identifies the need for this upgrade.

Note 2: For customers with System Reinforcements listed: If your present cost allocation to a System Reinforcement indicates \$0, then please be aware that as changes to the interconnection process occur, such as prior queued projects withdrawing from the queue, reducing in size, etc, the cost responsibilities can change and a cost allocation may be assigned to your project. In addition, although your present cost allocation to a System Reinforcement is presently \$0, your project may need this system reinforcement completed to be deliverable to the PJM system. If your project comes into service prior to completion of the system reinforcement, an interim deliverability study for your project will be required.

Note 3: For Transmission Owner Identified Upgrades: For TO Distribution Facilities that need upgrades, the TO has applied their cost allocation rules. For TO Sub-Regional Facilities in need of upgrades, PJM Cost Allocation Criteria has been applied.

6 Transmission Owner Scope of Work

The total physical interconnection costs is given in the table below:

Description	Total Cost
Attachment Facility: Tap the West Freedom – C&K Coal 25 kV Line, install 1 span with a switch, and install 25 kV meter.	\$ 37,932
Non-Direct Connection: Upgrade relaying at Burma Substation.	\$ 197,100
Non-Direct Connection: Install two 25 kV network switches on the West Freedom – C&K Coal 25 kV Line	\$ 113,835
Non-Direct Connection: Review customer drawings, nameplates, and relay settings.	\$ 63,200
Total Physical Interconnection Costs	\$ 412,067

7 Schedule

Based on the scope of work for the Attachment Facilities and the Direct and/or Non-Direct Connection facilities, it is expected to take a minimum of **12 months** after the signing of an Interconnection Construction Service Agreement to complete the installation. This includes the requirement for the IC to make a preliminary payment that compensates FE for the first three months of the engineering design work that is related to the Attachment Facilities. Full initial payment is required for Non-Direct Connection work. This assumes that there will be no environmental issues with any of the new properties associated with this project, that there will be no delays in acquiring the necessary permits for implementing the defined interconnection work and network upgrades, and that all transmission system outages will be allowed when requested.

The schedule for the required Network Impact Reinforcements will be more clearly identified in future study phases. The estimated time to complete each of the required reinforcements is identified in the “System Reinforcements” section of the report.

8 Transmission Owner Analysis¹

8.1 Transmission Owner Identified Network Impacts to Distribution Facilities

Potential TO identified network impacts to Transmission Owner distribution facilities were as follows:

Idx	Overloaded Element	Contingency	Rating [MVA]	Loading Before %	Loading After %	Contribution [MW]
WP-1	AF1-167 – C & K Coal 25 kV Line	Base Case	7	0%	193%	13.51

¹ For TO Distribution Facilities that need upgrades, the TO has applied their cost allocation rules. For TO Sub-Regional Facilities in need of upgrades, PJM Cost Allocation Criteria has been applied.

8.2 Transmission Owner Identified Network Impacts to Sub-Regional Facilities

Potential TO identified network impacts to Transmission Owner Sub-Regional facilities were as follows:

None

8.3 System Reinforcements on Distribution Facilities

Idx	Facility	Upgrade ID	Upgrade Description	Cost	Cost Allocated to AF1-167	Queue Dependencies
WP-1	AF1-167 – C & K Coal 25 kV Line	WP-AF2-F-0032	Description: Reconductor 1.3 miles of the Burns Jct - C & K Coal - West Freedom 25 kV line Time Estimate: 12 months	\$780,000	\$780,000	AF1-167
			TOTAL COST	\$780,000	\$780,000	

8.4 System Reinforcements on Sub-Regional Facilities

None

9 Interconnection Customer Requirements

The IC must design its Customer Facilities in accordance with all applicable standards, including the standards in FE's "Requirements for Transmission Connected Facilities" document located at:

<http://www.pjm.com/planning/design-engineering/to-tech-standards/private-firstenergy.aspx>.

Preliminary Protection requirements will be provided as part of the Facilities Study. Detailed Protection Requirements will be provided once the project enters the construction phase.

The IC has requested a non-standard GSU transformer winding configuration. This transformer is in violation of section 14.2.6 of FE's "Requirements for Transmission Connected Facilities" document and will not be accepted. The GSU transformer must have a delta or ungrounded wye connection on the high (utility) side, with the low side at the discretion of the IC.

9.1 Compliance Issues and Interconnection Customer Requirements

The proposed Customer Facilities must be designed in accordance with FE's "Requirements for Transmission Connected Facilities" document located at: <http://www.pjm.com/planning/design-engineering/to-tech-standards/private-firstenergy.aspx>. In particular, the IC is responsible for the following:

1. The purchase and installation of a fully rated 25 kV circuit breaker to protect the AF1-167 generator lead line. A single circuit breaker must be used to protect this line; if the project has several GSU transformers, the individual GSU transformer breakers cannot be used to protect this line.
2. The purchase and installation of the minimum required FE generation interconnection relaying and control facilities. This includes over/under voltage protection, over/under frequency protection, and zero sequence voltage protection relays.

3. The purchase and installation of supervisory control and data acquisition (“SCADA”) equipment to provide information in a compatible format to the FE Transmission System Control Center.
4. Compliance with the FE and PJM generator power factor and voltage control requirements.
5. The execution of a back-up service agreement to serve the customer load supplied from the AF1-167 generation project metering point when the units are out-of-service. This assumes the intent of the IC is to net the generation with the load.

The IC will also be required to meet all PJM, ReliabilityFirst, and NERC reliability criteria and operating procedures for standards compliance. For example, the IC will need to properly locate and report the over and under voltage and over and under frequency system protection elements for its units as well as the submission of the generator model and protection data required to satisfy the PJM and ReliabilityFirst audits. Failure to comply with these requirements may result in a disconnection of service if the violation is found to compromise the reliability of the FE system.

9.2 Power Factor Requirements

The IC shall design its non-synchronous Customer Facility with the ability to maintain a power factor of at least 0.95 leading (absorbing VARs) to 0.95 lagging (supplying VARs) measured at the high-side of the facility substation transformer(s) connected to the FE transmission system.

10 Revenue Metering and SCADA Requirements

10.1 PJM Requirements

The Interconnection Customer will be required to install equipment necessary to provide Revenue Metering (KWH, KVARH) and real time data (KW, KVAR) for IC's generating Resource. See PJM Manuals M-01 and M-14D, and PJM Tariff Section 8 of Attachment O.

10.2 Meteorological Data Reporting Requirements

The solar generation facility shall provide the Transmission Provider with site-specific meteorological data including:

- Back Panel temperature (Fahrenheit)
- Irradiance (Watts/meter²)
- Ambient air temperature (Fahrenheit) – (Accepted, not required)
- Wind speed (meters/second) – (Accepted, not required)
- Wind direction (decimal degrees from true north) – (Accepted, not required)

10.3 Interconnected Transmission Owner Requirements

The IC will be required to comply with all FE revenue metering requirements for generation interconnection customers which can be found in FE's "Requirements for Transmission Connected Facilities" document located at: <http://www.pjm.com/planning/design-engineering/to-tech-standards/private-firstenergy.aspx>

11 Summer Peak Analysis

The Queue Project AF1-167 was evaluated as a 13.5 MW (Capacity 8.1 MW) injection tapping the C&K CL1 to Freedom 25 kV line in the APS area. Project AF1-167 was evaluated for compliance with applicable reliability planning criteria (PJM, NERC, NERC Regional Reliability Councils, and Transmission Owners). Project AF1-167 was studied with a commercial probability of 100.0 %. Potential network impacts were as follows:

11.1 Generation Deliverability

(Single or N-1 contingencies for the Capacity portion only of the interconnection)

None

11.2 Multiple Facility Contingency

(Double Circuit Tower Line, Fault with a Stuck Breaker, and Bus Fault contingencies for the full energy output)

None

11.3 Contribution to Previously Identified Overloads

(This project contributes to the following contingency overloads, i.e. "Network Impacts", identified for earlier generation or transmission interconnection projects in the PJM Queue)

None

11.4 Steady-State Voltage Requirements

To be determined

11.5 Potential Congestion due to Local Energy Deliverability

PJM also studied the delivery of the energy portion of this interconnection request. Any problems identified below are likely to result in operational restrictions to the project under study. The developer can proceed with network upgrades to eliminate the operational restriction at their discretion by submitting a Merchant Transmission Interconnection request.

Note: Only the most severely overloaded conditions are listed below. There is no guarantee of full delivery of energy for this project by fixing only the conditions listed in this section. With a Transmission Interconnection Request, a subsequent analysis will be performed which shall study all overload conditions associated with the overloaded element(s) identified.

ID	FROM BUS#	FROM BUS	kV	FROM BUS AREA	TO BUS#	TO BUS	kV	TO BUS AREA	CK T ID	CONT NAME	Type	Rating MVA	PRE PROJECT LOADIN G %	POST PROJECT LOADIN G %	AC/D C	MW IMPACT
49535909	235151	01BURMA	115.0	AP	200583	26PINEY	115.0	PENELEC	1	PN-P1-2-PN-345-003	operation	277.0	87.31	88.42	AC	3.06

11.6 System Reinforcements

None

11.7 Queue Dependencies

The Queue Projects below are listed in one or more indices for the overloads identified in your report. These projects contribute to the loading of the overloaded facilities identified in your report. The percent overload of a facility and cost allocation you may have towards a particular reinforcement could vary depending on the action of these earlier projects. The status of each project at the time of the analysis is presented in the table. This list may change as earlier projects withdraw or modify their requests.

None

11.8 Contingency Descriptions

Contingency Name	Contingency Definition
PN-P1-2-PN-345-003	CONTINGENCY 'PN-P1-2-PN-345-003' /* HANDSOME LAKE - WAYNE 345KV DISCONNECT BRANCH FROM BUS 200826 TO BUS 200595 CKT 1 /* 26HANDSMLK 345 26WAYNE 345 END

12 Light Load Analysis

Not required for solar projects.

13 Short Circuit Analysis

The following Breakers are overdutied:

None

13.1 System Reinforcements - Short Circuit

None

14 Stability and Reactive Power

(Summary of the VAR requirements based upon the results of the dynamic studies)


PJM will not be performing a stability analysis for this project.

15 Affected Systems

15.1 NYISO

NYISO Impacts to be determined during later study phases (as applicable).

16 Attachment 1: One Line Diagram

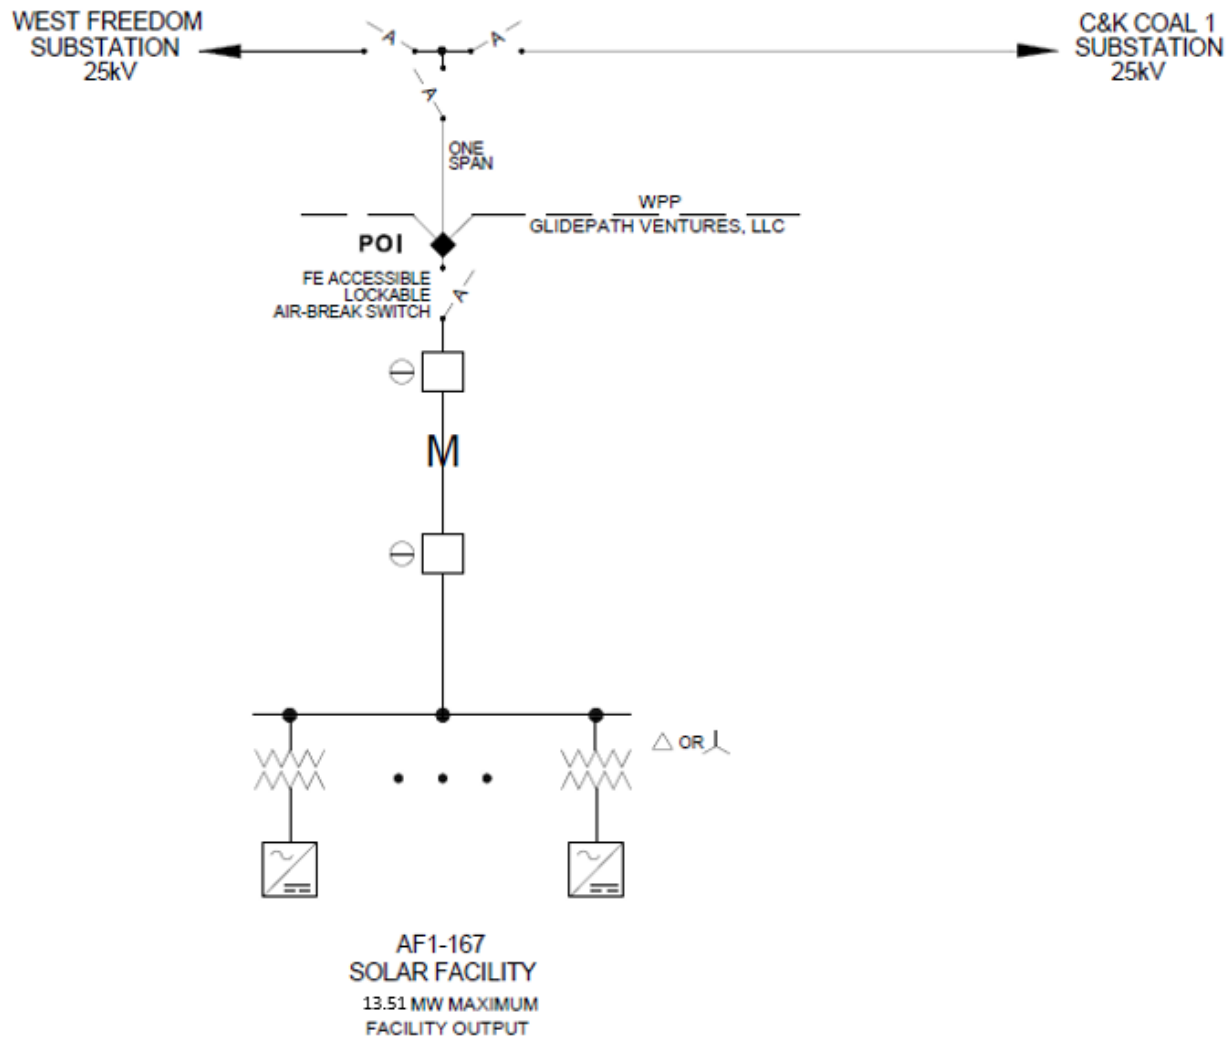

◆ = POI (POINT OF INTERCONNECTION) LOCATED AT INTERCONNECTION CUSTOMER'S DEAD-END STRUCTURE WHERE WEST PENN POWER'S (WPP) OWNED 46kV TRANSMISSION LINE TERMINATES

M = REVENUE METERING FOR INTERCONNECTION CUSTOMER IS OWNED, OPERATED, AND MAINTAINED BY WEST PENN POWER.

⊖ = SCADA INDICATION