Wave Reflection and Transmission at Oblique Incidence: Parallel Polarization – Part 1

James T. Aberle, Ph.D.
Associate Professor Emeritus

School of ECEE

IRA A. FULTON SCHOOLS OF engineering
ARIZONA STATE UNIVERSITY

Lecture Objective

By the end of this lecture, you will be prepared to:

- Analyze plane wave reflection from a perfectly conducting boundary at oblique incidence for a wave with parallel polarization.

Oblique Incidence On a Plane Perfectly Conducting Boundary

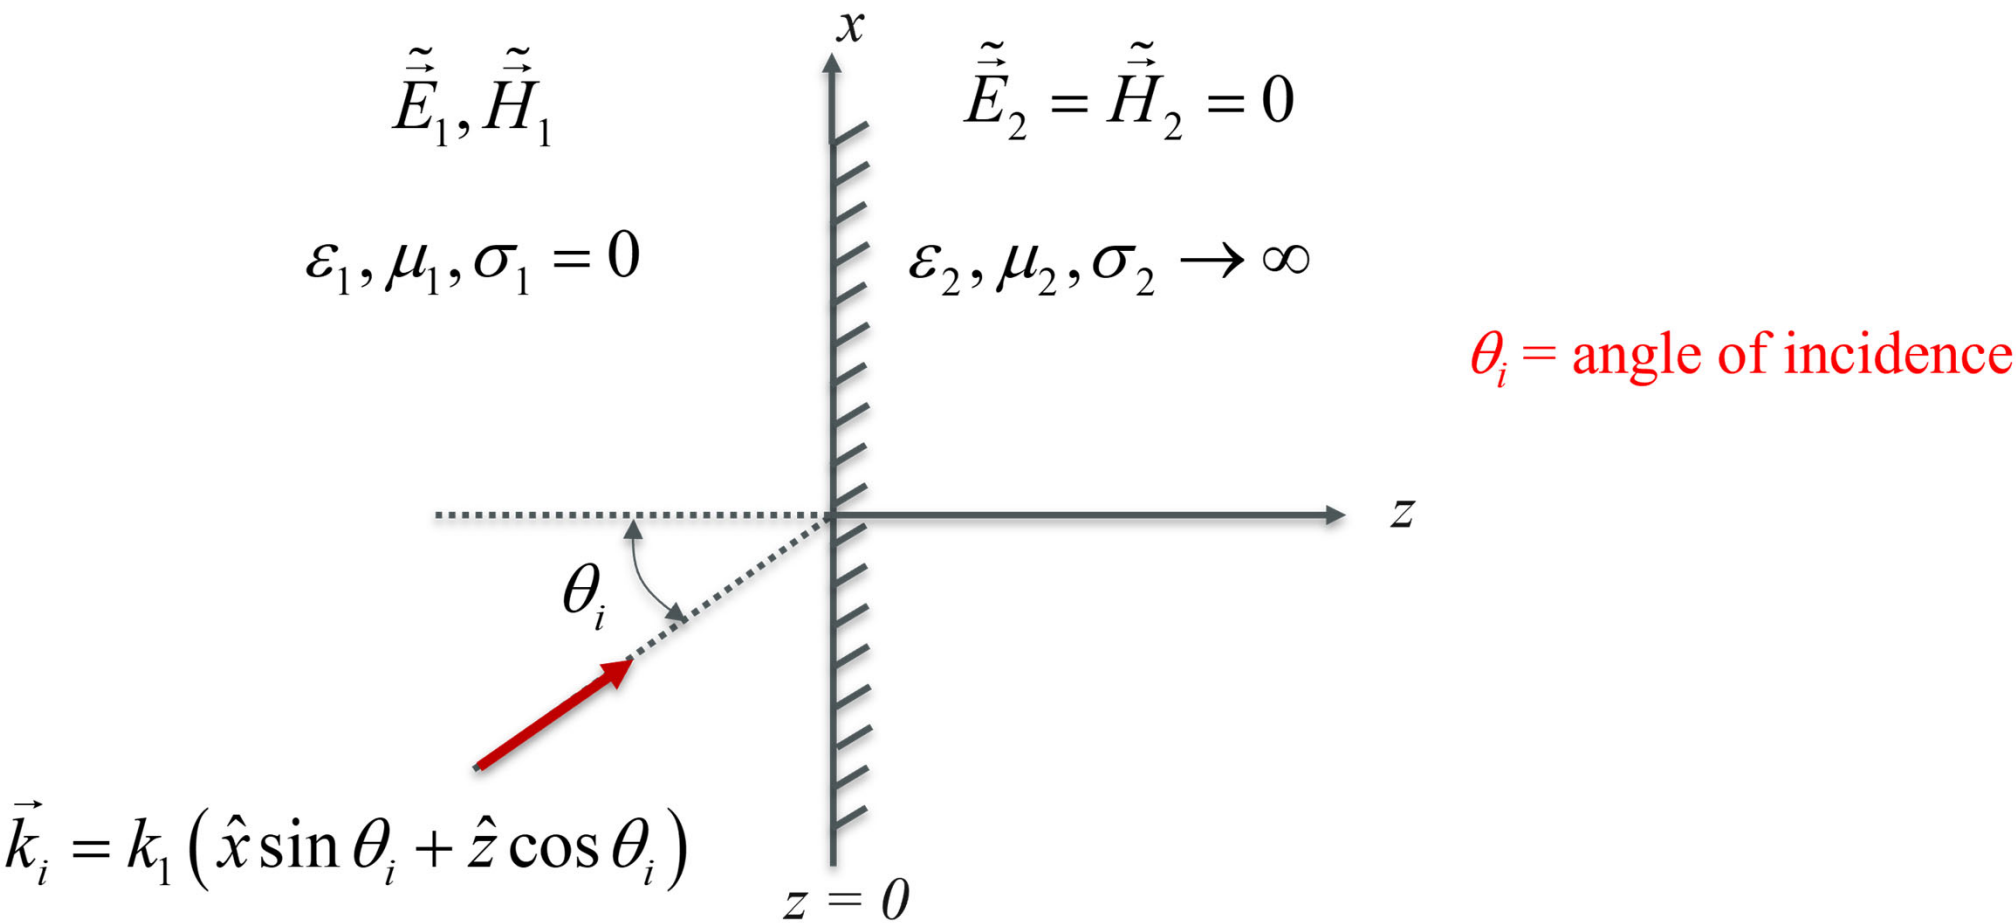

Incident and Reflected Waves for Parallel Polarization

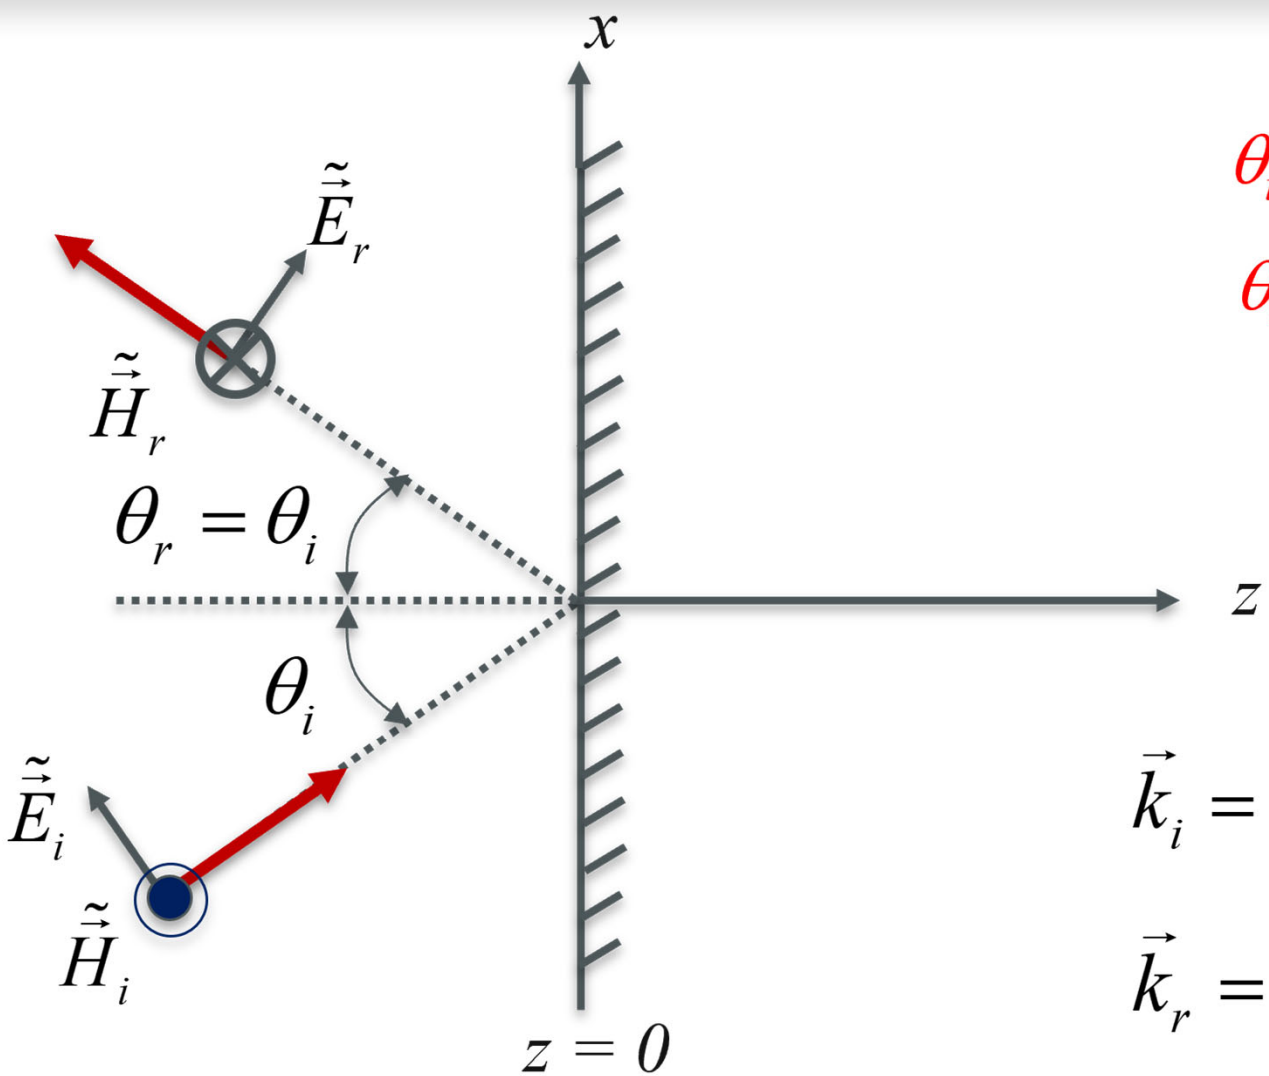

θ_i = angle of incidence

θ_r = angle of reflection

$$\vec{k}_i = k_1\left(\hat{x}\sin\theta_i + \hat{z}\cos\theta_i\right)$$

$$\vec{k}_r = k_1\left(\hat{x}\sin\theta_i - \hat{z}\cos\theta_i\right)$$

Incident Wave for Parallel Polarization

- The magnetic field of the incident wave is given by

$$\tilde{\vec{H}}_i = \hat{y}\frac{E_0^i}{\eta_1}e^{-j\vec{k}_i\bullet\vec{R}} = \hat{y}\frac{E_0^i}{\eta_1}e^{-jk_1\left(x\sin\theta_i + z\cos\theta_i\right)}$$

- The electric field of the incident wave is given by

$$\begin{aligned}\tilde{\vec{E}}_i &= -\eta_1(\hat{x}\sin\theta_i + \hat{z}\cos\theta_i)\times\tilde{\vec{H}}_i \\ &= (\hat{x}\cos\theta_i - \hat{z}\sin\theta_i)E_0^i e^{-jk_1(x\sin\theta_i + z\cos\theta_i)}\end{aligned}$$

Reflected Wave for Parallel Polarization (1 of 2)

- Postulate that the magnetic field of the reflected wave is given by

$$\tilde{\vec{H}}_r = -\hat{y}\frac{E_0^r}{\eta_1}e^{-j\vec{k}_r\bullet\vec{R}} = -\hat{y}\frac{E_0^r}{\eta_1}e^{-jk_1\left(x\sin\theta_r - z\cos\theta_r\right)}$$

- The electric field of the reflected wave is given by

$$\begin{aligned}\tilde{\vec{E}}_r &= -\eta_1(\hat{x}\sin\theta_i - \hat{z}\cos\theta_i)\times\tilde{\vec{H}}_r \\ &= (\hat{x}\cos\theta_i + \hat{z}\sin\theta_i)E_0^r e^{-jk_1(x\sin\theta_i - z\cos\theta_i)}\end{aligned}$$

Reflected Wave for Parallel Polarization (2 of 2)

- To uniquely specify the reflected wave in terms of the incident wave, we need to evaluate E_0^r
- These parameters must be chosen such that the BC at $z = 0$ is satisfied.
- To satisfy the BC, the <u>tangential</u> electric field must be zero at $z = 0$ for all values of x.
- To satisfy the BC, the *x-component* of the total field must be zero at $z = 0$ for all values of x.
- The above condition requires that:

$$E_0^r = -E_0^i$$

Total Field for Parallel Polarization (1 of 2)

- The total magnetic field is given by

$$\tilde{\vec{H}}_1 = \tilde{\vec{H}}_i + \tilde{\vec{H}}_r = \hat{y}\,\frac{2E_{i0}}{\eta_1}\,e^{-jk_1 x \sin\theta_i}\cos(k_1 z \cos\theta_i)$$

- The total electric field is given by

$$\begin{aligned}\tilde{\vec{E}}_1 &= \tilde{\vec{E}}_i + \tilde{\vec{E}}_r \\ &= -2E_0^i e^{-jk_1 x \sin\theta_i}[\hat{x} j \cos\theta_i \sin(k_1 z \cos\theta_i) + \hat{z}\sin\theta_i \cos(k_1 z \cos\theta_i)]\end{aligned}$$

- Notice that the x-component (tangential component) of the electric field is zero at $z = 0$ but the z-component (normal component) is maximum at $z = 0$.

Total Field for Parallel Polarization (2 of 2)

- Note that the total electric and magnetic fields can be described as standing waves in the z-direction because of the factors:

$$\cos(\beta_1 z \cos\theta_i)$$
$$\sin(\beta_1 z \cos\theta_i)$$

- The total electric and magnetic fields can be described as traveling waves in the x-direction because of the factor:

$$e^{-j\beta_1 x \sin\theta_i}$$

Standing Wave Pattern for Total Electric Field

- The nulls in the standing wave pattern for the *x-component* of the total electric field occur when

$$\sin(k_1 z_m \cos\theta_i) = 0 \quad \Rightarrow k_1 z_m \cos\theta_i = m\pi, \quad m \in Z$$

$$z_m = \frac{-m\pi}{k_1 \cos\theta_i}, \quad m = 0,1,2,\cdots$$

$$z_m = \frac{-m\lambda}{2\cos\theta_i}, \quad m = 0,1,2,\cdots$$

Note that the z-component of the total electric field is maximum when the x-component is minimum.

Traveling Wave Behavior for Total Field (1 of 2)

- For the traveling wave factor, the 'effective' propagation constant can be obtained by considering

$$e^{-jk_1 x \sin\theta_i} = e^{-jk_{1x}x} \quad \Rightarrow k_{1x} = k_1 \sin\theta_i$$

- The phase velocity in the x-direction can be defined as

$$v_{1x} = \frac{\omega}{k_{1x}} = \frac{\omega}{k_1 \sin\theta_i}$$

Traveling Wave Behavior for Total Field (2 of 2)

- Notice that

$$v_{1x} = \frac{\omega}{k_1 \sin\theta_i} \geq v_1 = \frac{\omega}{k_1}$$

- If medium 1 were free space:

$$v_{1x} = \frac{\omega}{k_0 \sin\theta_i} \geq \frac{\omega}{k_0}$$
$$= c$$

- The phase velocity of the traveling wave exceeds the speed of light in the medium.
- No laws of physics are being violated since it is only 'information' that cannot travel faster than the speed of light.
- "Fast wave"
- This wave can be referred to as "transverse magnetic" ("TM") because the magnetic field is transverse to the direction of propagation (x) but the electric field is not.

Summary

- The behavior of a plane wave obliquely incident on the planar boundary between a dielectric half-space and a perfect conductor depends on the polarization of the incident wave.
- The total fields exhibit a standing wave nature in the z-direction and traveling wave behavior in the x-direction.

Ira A. Fulton Schools of Engineering

Arizona State University