



MOKO SMART

Bluetooth Beacon Category



www.mokosmart.com



iBeacon



Eddystone

Quuppa



Wirepas

CISCO
SPACES



核芯物联
COREIOT



FC



CE



RoHS



Reach

MOKO TECHNOLOGY LTD.



Empowering Connections

Founded in 2006, MOKO Technology Ltd. is a leading manufacturer and provider of ODM, OEM, and IoT devices in China. In 2013, MOKO Technology Ltd. established the R&D Center and created its own IoT brand – MOKO SMART, focusing on IoT technology and comprehensive product lines including Bluetooth Low Energy, LoRaWAN, Wi-Fi, RFID, GPS, LTE, UWB and other wireless technology. This emphasizes MOKO's commitment to innovation and diverse wireless products, leading a path towards a connected future.



80+

R&D Engineers



200+

IoT Products
Designed



10+ yrs.

IoT Development
Experience



13000+ m²

Factory



5,000,000+

Annual Capacity




100+


Countries and
Regions Reached

Device Category

Asset Tag

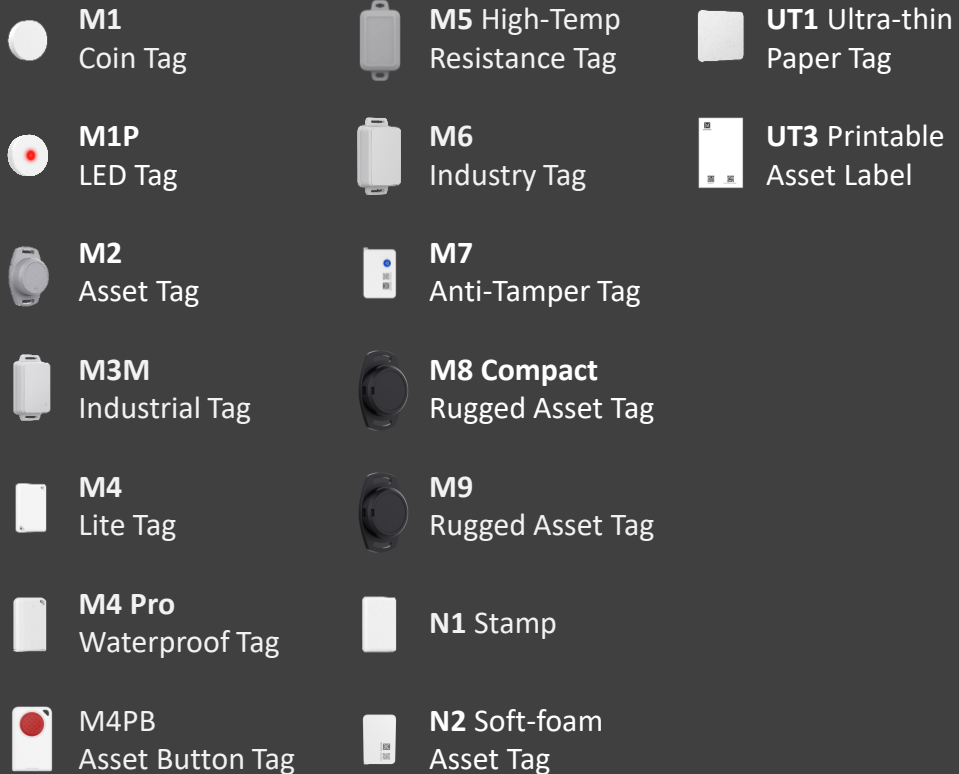

Personnel Tag & Emergency Button

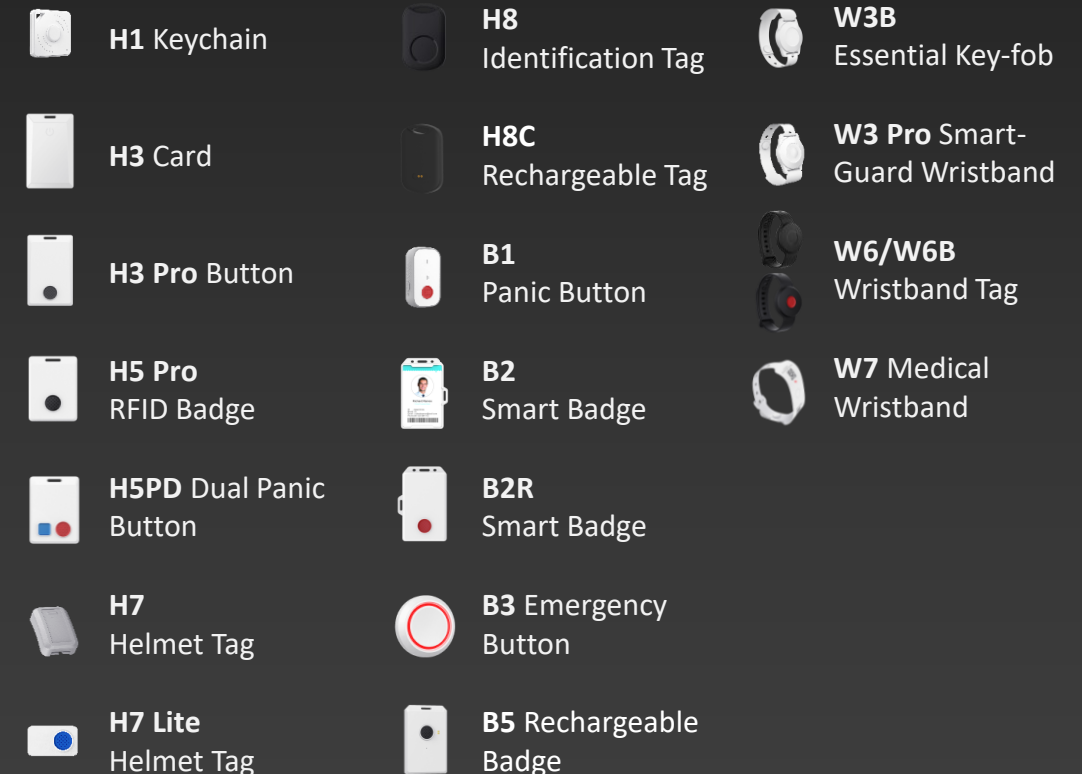


Device Category

Location Anchor

-  **H2 Navigator**
-  **M3 Forte**
-  **L01A Location Anchor**
-  **R1 Road Stud**
-  **L03 Anchor Pro**
-  **L04 Navigation Anchor**
-  **L05 USB Beacon**

Sensor Tag

-  **S01P PIR Presence**
-  **S02R ToF Range Sensor**
-  **S03D Door Sensor**
-  **S05T Asset Temperature Logger**
-  **H4 Series Temperature & Humidity**
-  **Water Leakage Probe**
-  **PT100 Temperature Probe**
-  **L02S Multiple Sensor**
-  **M4 Pro Temperature Logger**

Asset Tag



MOKO SMART





MOKO SMART

Asset Tag

						
Product property		M1 Coin Tag	M1P LED Tag	M2 Asset Tag	M3M Industrial Tag	M4 Lite Tag
Physical	Dimension (mm)	Φ26.0*7.1	Φ30.0*8.0	70.0*46.0*21.0	94.6*51.7*22.8	36.5*23.5*5.2
	IP/IK Rated	-	-	IP67	IP67/IK08	-
	Color	White	White	Gray	Gray	White
	Installation	3M tape	3M tape	Screw/3M tape/Zip tie	Screw/Magnetic	3M tape/Zip tie
Connectivity	Bluetooth ^①	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.1
	Long range feature ^②	-	Yes	Optional	Optional	Yes
	Third-party compatibility	-	-	Quuppa/Wirepas certified	-	-
Hardware	Sensor	Accelerometer	Yes	Yes	Yes	Yes
		Temperature	-	Optional	Optional	Optional
		Humidity	-	-	-	-
		Door detection	-	-	Optional	-
	LED		Red	Red	Red	Red
	Power on		Insulating strip	Insulating strip	Magnetic switch	Magnetic switch / Ejector pin
	Battery capacity		220mAh	220mAh	1000mAh	2600mAh
	Replaceable battery		Yes	Yes	Yes	Yes
	Lifespan (default settings)		1.5 years	1.5 years	5 years	8+ years
	Operating temperature		-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C
Certification		FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH

^①Compatible in hardware. ^②Long range feature refer to the Coded PHY in advertisement mode. (Hereinafter the same)



Asset Tag

						
Product property		M4 Pro Waterproof Tag	M4PB Asset Button Tag	M5 High-Temp Resistance Tag	M6 Industry Tag	M7 Anti-Tamper Tag
Physical	Dimension (mm)	42.0*26.0*6.0	43.3*26.0*6.9	64.9*32.5*13.0	97.0*53.5*28.0	53.3*33.3*5.0 (CR2032 version) 57.3*37.3*6.8 (CR2450 version)
	IP/IK Rated	IP67	IP67	IP68/IP69K/IK07	IP67/IK08	IP67
	Color	White	White	Gray	Gray	White
	Installation	3M tape/Zip tie	3M tape/Zip tie	Screw Zip tie	Screw Sticker Zip Tie Magnetic mounting	Sticker
Connectivity	Bluetooth ^①	BLE 5.1	BLE 5.0	BLE 5.1	BLE 5.1	BLE 5.0
	Long range feature	Yes	-	-	Yes	-
	Third-party compatibility	Quuppa certified	-	-	Wirepas certified	-
Hardware	Sensor	Accelerometer	Yes	Yes	Yes	Yes
		Temperature	Optional	-	Optional	-
		Humidity	-	-	-	-
		Door detection	-	-	-	-
	LED	Red	Red	Red Green	Red	Red Green
	Power on	Insulating strip	Button	Magnetic switch	Magnetic switch ^①	Peeling off release paper
	Battery capacity	220mAh	220mAh	600mAh	5200mAh (Li-SOCl2) 3200mAh (Alkaline)	220mAh (CR2032 version) 600mAh (CR2450 version)
	Replaceable battery	Yes	Yes	No	Yes	No
	Lifespan (default settings)	1.5 years	1.5 years	3 years	10+ years (Li-SOCl2) 5 years (Alkaline)	1.5 years (CR2032 version) 3 years (CR2450 version)
	Operating temperature	-20°C / +60°C	-20°C / +60°C	-20°C / +100°C	-20°C/60°C (Li-SOCl2) 0°C/40°C (Alkaline)	-20°C / +60°C
	Certification	FCC CE RoHS REACH	FCC CE RoHS WEEE	FCC CE RoHS WEEE	FCC CE RoHS REACH	FCC CE RoHS WEEE

^①Magnetic switch is not applicable for the magnetic mounting version.



MOKO SMART

Asset Tag

							
Product property		M8 Compact Rugged Asset Tag	M9 Rugged Asset Tag	N1 Stamp	N2 Soft-foam Asset Tag	UT1 Ultra-thin Paper Tag	UT3 Printable Asset Tag
Physical	Dimension (mm)	M8: 60.0*39.2*14.7 M8A: Φ38.0*13.5	M9: 60.0*39.2*17.2 M9A: Φ38.0*16.0	36.5*23.5*4.7	51.0*30.5*3.0	73.3*65.0*2.3 (UT1) 73.3*83.5*1.2 (UT1P)	160.0*100.0*1.2mm
	IP/IK Rated	IP68/IP69K/IK06	IP68/IK06	-	IP67	-	-
	Color	M8 – Black M8A - White	M9 – Black M9A – White	White	White	White	White
	Installation	Screw Sticker	Screw Sticker	3M tape	3m tape	Sticker	Sticker
Connectivity	Bluetooth ^①	BLE 5.0	BLE 5.0	BLE 5.1	BLE 5.1	BLE 5.1	BLE 5.1
	Long range feature	-	-	-	-	-	-
	Third-party compatibility	-	-	-	-	-	-
Hardware	Sensor	Accelerometer	Yes	Yes	-	-	-
		Temperature	-	-	Optional	-	-
		Humidity	-	-	-	-	-
		Door detection	-	-	-	-	-
	LED		Red	Red	Red	-	-
	Power on		Magnetic switch	Magnetic switch	Insulating strip	Peeling off the release paper	#1: Peeling off the release paper #2: NFC activation
	Battery capacity		600mAh	1000mAh	85mAh	85mAh	40mAh
	Replaceable battery		Yes	Yes	Yes	No	No
	Lifespan (default settings)		3 years	5 years	17 months	14 months	3 months
	Operating temperature		-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +55°C
Certification		FCC CE RoHS WEEE	FCC CE RoHS WEEE	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS WEEE

Personnel Tag & Emergency Button





								
Product property		H1 Keychain	H3 Card	H3 Pro Button	H5 Pro RFID badge	H5PD Dual Panic Button	H7 Helmet Tag	H7 Lite Helmet Tag
Physical	Dimension (mm)	32.5*32.5*7.0	85.6*54.1*5.2	89.0*57.0*5.9	68.0*50.0*6.3	68.0*50.0*6.6	57.4*41.4*18.7	42.6*25.2*8.3
	IP rated	IP65	IP66	IP66	IP66	IP65	IP67	IP67
	Color	White	White	White (Body) Black (Button)	White (Body) Black (Button)	White (Body) Blue & Red (Button)	Gray	White (Body) Blue (Button)
	Installation	Lanyard/Zip Tie	Lanyard	Lanyard	Lanyard	Lanyard	3M tape/Velcro (in helmet)	3M tape (in helmet)
Connectivity	Bluetooth ^①	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0
	Long range mode	-	Optional	-	Optional	-	-	-
	Third-party compatibility	-	-	-	Wirepas certified	-	-	-
Hardware	Sensor	Accelerometer	Yes	Yes	Yes	Yes	Yes	Yes
		RFID/NFC	-	Yes	Yes	Yes	Optional	-
		Buzzer	Optional	-	Yes	-	Yes	-
		Motor	-	-	-	-	-	-
	LED		Red	Red	Red Blue Green	Red	Red	Red
	Power on		Button	Button	Button	Button	Button	Button
	Battery capacity		220mAh	800mAh	800mAh	550mAh	550mAh	220mAh
	Replaceable battery		Yes	No	No	Yes	Yes	No
	Lifespan (default settings)		1.5 years	5 years	5 years	3 years	3 years	1.5 years
	Operating temperature		-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C
Certification		FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS WEEE	FCC CE RoHS REACH	FCC CE RoHS REACH



								
Product property			H8 Identification Tag	H8C Rechargeable Tag	B1 Panic Button	B2 Smart Badge	B2R Smart Badge	B3 Emergency Button
Physical	Dimension (mm)		56.0*36.0*7.3	56.0*36.0*7.7	73.1*40.6*16.9	98.0*65.2*8.5	98.0*65.2*8.6	Φ48.0*15.3
	IP rated		IP65	IP67	IP65	IP66	IP66	-
	Color		Black	Black	White (Body) Red (Button)	White (Body) Red (Button)	White (Body) Red (Button)	White
	Installation		Lanyard	Lanyard	Lanyard	Lanyard	Lanyard	3M tape/Lanyard
Connectivity	Bluetooth ^①		BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0
	Long range mode		-	No	-	-	-	-
	Third-party compatibility		-	Wirepas certified	-	Quuppa certified	-	-
Hardware	Sensor	Accelerometer	Yes	Yes	Yes	Yes	Yes	Yes
		RFID/NFC	--	No	-	Yes	Yes	-
		Buzzer	Optional	No	Yes	Yes	Yes	Optional
		Motor	-	No	Yes	-	-	-
	LED		Red	RGB	Red/Green/Blue	Red	Red	Red/Green/Blue
	Power on		Button	Button	Button	Button	Button	Button
	Battery capacity		220mAh	80mAh	500mAh	800mAh	880mAh	600mAh
	Replaceable battery		Yes	Rechargeable	Rechargeable	No	yes	Yes
	Lifespan (default settings)		15 months	4 months per charge	6 months per charge ^①	5 years	5 years	3 years
	Operating temperature		-20°C / +60°C	-20°C/60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C
Certification			FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS WEEE	FCC CE RoHS REACH

^①Recommend at least charging per maximum 6 months due to the characteristics of the lithium battery.



							
Product property			B5 Rechargeable Badge	W3B Essential Keyfob	W3 Pro Smart-Guard Wristband	W6/W6B Wristband Tag	W7 Medical Wristband
Physical	Dimension (mm)		91.0*59.0*7.5	40.4*29.0*8.6	40.0*32.0*10.3	Φ38.6*10.5 (W6 - Body) Φ38.6*10.8 (W6B - Body) 198mm x 39.6mm (Strap)	250*24.5*4.5 (W7 for adult) 205*24.5*4.5 (W7 for kid) 160*24.5*4.5 (W7 for infant)
	IP rated		IP66	-	IP67	IP67	IP67
	Color		White (Enclosure) Black (Button)	White	White	W6: Black W6B: Black(body), Red(button)	White
	Installation		Lanyard	Lanyard/Strap	Lanyard/Strap	Lanyard/Strap	Strap
Connectivity	Bluetooth ^①		BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0
	Long range mode		-	-	-	-	-
	Third-party compatibility		Wirepas certified	-	-	Quuppa certified	-
Hardware	Sensor	Accelerometer	Yes	Yes	Yes	Yes	-
		RFID/NFC	-	-	-	Yes (Only W6 support)	Yes
		Buzzer	Yes	-	-	-	-
		Motor	Yes	-	-	-	-
	LED		Red/Green/Blue	Red	Red	Red	Red
	Power on		Button	Button	Button	Button	NFC activation
	Battery capacity		350mAh	220mAh	220mAh	220mAh	38mAh
	Replaceable battery		Rechargeable	Yes	No	Yes	No
	Lifespan (default settings)			1.5 years	1.5 years	1.5 years	5 months
	Operating temperature		-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-25°C/55°C
Certification			FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH

Location Anchor



					
Product property		H2 Navigator	M3 Forte	L01/L01A Location Anchor	R1 Road stud
Physical	Dimension (mm)	48.5*48.0*14.7	122.6*72.9*33.8	76.2*53.6*24.0 (L01) Φ54.5*24.0 (L01A)	120.0*110.0*28.0
	IP Rated	IP65	IP67	IP67	IP68
	Color	White	Gray	White	Yellow
	Installation	3M tape/Zip Tie	Screw/3M tape/Zip Tie	Screw/Bracket/3M tape/Magnetic mounting	Screw/Zip Tie
Connectivity	Bluetooth ^①	BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.0
	Long range mode	-	Optional	Optional	-
	Third-party compatibility	-	Wirepas certified	-	-
Hardware	Sensor	Accelerometer	Optional	Optional	-
		Temperature & Humidity	-	Optional	-
		Door detection	-	Optional	-
		Barometer	-	Optional	-
	LED		Red	Red	-
	Power on		Button	Magnetic switch	Inner button or Magnetic switch ^①
	Battery Capacity		1000mAh	8000mAh	2400mAh
	Replaceable battery		Yes	Yes	Yes
	Lifespan (default settings)		5 years	10+ years	8+ years
	Operating temperature		-20°C / +60°C	-20°C / +60°C	-40°C / +80°C
Certification		FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH

^①Magnetic switch is not applicable for the magnetic mounting version.

					
Product property		L03 Anchor Pro		L04 Navigation Anchor	L05 USB Beacon
Physical	Dimension (mm)	74.0*74.0*24.0		73.8*46.3*26.5	43.0*24.7*11.4 (L05I) Φ9 *108 (External Antenna for L05E)
	IP Rated	IP67		No	No
	Color	White		White	Black
	Installation	Screw with bracket Sticker		Screw with bracket Sticker	Insert to USB port
Connectivity	Bluetooth ^①	BLE 5.1		BLE 5.1	BLE 5.0
	Long range mode	Yes		Yes	-
	Third-party compatibility	Wirepas certified		-	-
Hardware	Sensor	Accelerometer	Optional		-
		Temperature & Humidity	Optional		-
		Door detection	-		-
		Barometer	-		-
	LED		Red/Green/Blue	Red	Red/Green
	Power on		Button	Magnetic switch	Button
	Battery Capacity		10400mAh (Li-SOCI2 version) 6400mAh (Alkaline version)	5200mAh (Li-SOCI2 version) 3200mAh (Alkaline version)	USB power (without battery)
	Replaceable battery		Yes	Yes	No
	Lifespan (default settings)		10+ years (Li-SOCI2) 8 years (Alkaline)	10+ years (Li-SOCI2) 5 years (Alkaline)	USB power
	Operating temperature		-20°C/60°C (Li-SOCI2 battery) 0°C/40°C (Alkaline battery)	-20°C/60°C (Li-SOCI2 battery) 0°C/40°C (Alkaline battery)	-20°C/60°C
Certification		FCC CE RoHS REACH		FCC CE RoHS REACH	FCC CE RoHS REACH

Sensor Tag



						
Product property			S01P PIR Presence	S02R ToF Range Sensor	S03D Door Sensor	S05T Asset Temperature logger
Physical	Dimension (mm)		74.2*32.8*46.9	Φ38.0*14.5	77.5*27.0*24.7 (Body) 40.0*16.0*15.0 (Magnet)	49.6*28.8*4.7
	IP Rated		-	IP67	IPX4	IP67
	Color		White	Black	White	White
	Installation		3M tape/Bracket	3M tape	3M tape/Bracket	3m tape
Connectivity	Bluetooth ^①		BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.1
	Long range mode		-	-	-	Yes
	Third-party compatibility		-	-	-	-
Hardware	Sensor	Sensor type	Passive IR/Door detection	ToF range sensor	Magnetic sensor	Temperature sensor
		Sensor specifications	Viewing angle: Horizontal 120° / Vertical 60° Detection range: 12m in Maximum	Ranging distance: 40mm-3m Ranging error: ±10mm in short range mode ±1% in long range mode	Detection range: 20mm	Accuracy tolerance: ±0.5°C History storage: 60000 groups
	LED		Red	Red	Red	Red/Green
	Power on		Button	Magnetic switch	Button	Button
	Battery capacity		5200mAh	600mAh	2600mAh	220mAh
	Replaceable battery		Yes	Yes	Yes	No
	Lifespan (default settings)		5 years	3 years – Short ranging mode (<1m) 1 year – Long ranging mode (1m - 3m)	8 years	2 years
	Operating temperature		-20°C / +60°C	-20°C / +60°C	-20°C / +60°C	-30°C / +60°C
	Certification			FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH

							
Product property			H4 Series Temperature & Humidity	Water leakage Probe	PT100 Temperature Probe	L02S Multiple Sensor	M4 Pro Temperature Logger
Physical	Dimension (mm)		70.0*32.2*18.2 (H4) 88.0*32.2*18.2 (H4 Pro) Φ3*1000mm (Probe)	122.6*72.9*33.8 (Body) 1 meter length (Probe)	122.6*72.9*33.8 (Body) 1 meter length (Probe)	69.9*46.7*18.0	42.0*26.0*6.0
	IP Rated		IPX4	IP67	IP67	IP67	IP67
	Color		Black	Gray	Gray	Gray	White
	Installation		3M tape	3M tape	3M tape	Screw/3M tape/Zip Tie/Magnetic mounting	3M tape/Zip tie
Connectivity	Bluetooth ^①		BLE 5.0	BLE 5.0	BLE 5.0	BLE 5.1	BLE 5.1
	Long range mode		-	Optional	Optional	Yes	Yes
	Third-party compatibility		Wirepas certified	-	-	-	-
Hardware	Sensor	Sensor type	Temperature/Humidity sensor Barometer sensor (Optional)	Water leakage sensor	PT100 temperature sensor	Temperature/Humidity/ Door detection	Temperature
		Sensor specifications	Accuracy (Typical): ±0.5℃ / ±3% RH (H4) ±0.3℃ / ±2% RH (H4 Pro)	Single point detection Wire detection (optional)	Accuracy tolerance: 0.5℃ Measurement range: -100℃/100℃	Resolution: 0.1℃ / 0.1% RH Accuracy (Typical): ±0.5℃ / ±2% RH	Resolution: 0.1℃ Accuracy (Typical): ±0.5℃
	LED		Red	Red	Red	Red	Red
	Power on		Button	Magnetic switch	Magnetic switch	Inner button / Magnetic switch	Insulating strip
	Battery capacity		1200mAh	8000mAh	8000mAh	1000mAh	220mAh
	Replaceable battery		Yes	Yes	Yes	Yes	Yes
	Lifespan (default settings)		5 years	10+ years	10+ years	5 years	1.5 years
	Operating temperature		-20℃ / +60℃ (Body) -40℃ / +125℃ (Probe)	-20℃ / +60℃	-20℃ / +60℃ (Body) -100℃/100℃ (Probe)	-20℃ / +60℃ -30℃/+80℃ (Customizable)	-20℃ / +60℃ -30℃/+80℃ (Customizable)
Certification			FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH	FCC CE RoHS REACH



MOKO SMART

Thank you!



LinkedIn



Official Website

MOKO TECHNOLOGY LTD.

Address: 4F, Building 2, Guanghui Technology Park, MinQing Rd,
Longhua, Shenzhen, Guangdong, China

E-mail: sales@mokosmart.com

www.mokosmart.com