



CSM V3 -- HMI Module 10 -- Touchscreen Frame V1.2 [RC1]

Back plate for ELECROW RC070S 7" touchscreen (165 x 102 x 35 mm)

Isometric View

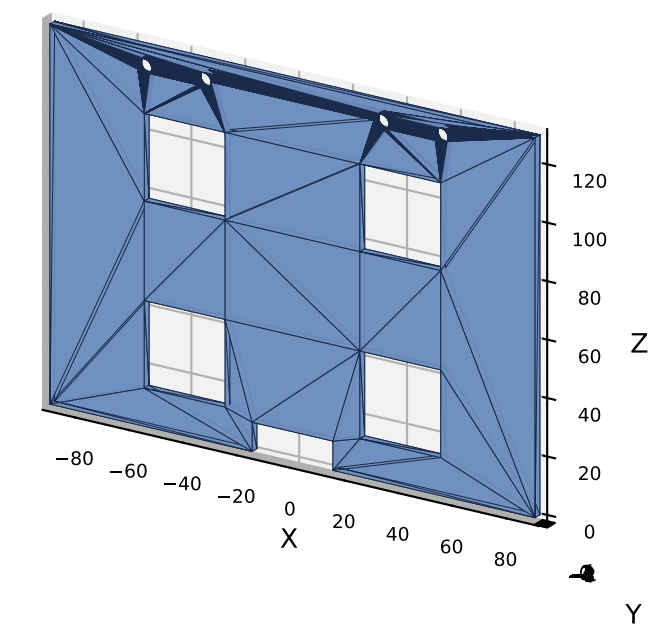


Front View (operator) -- 4 windows + 4 beam bolts

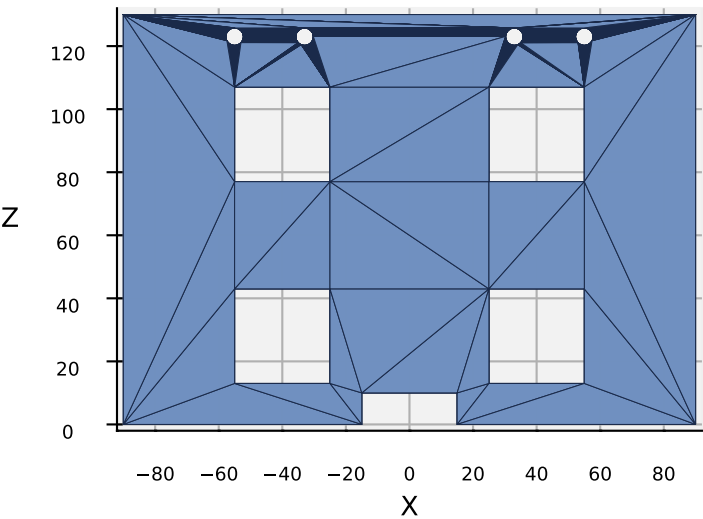


|                        |                        |
|------------------------|------------------------|
| <b>PART</b>            | Touchscreen Frame      |
| <b>NUMBER</b>          | M10-P05                |
| <b>VERSION</b>         | V1.2 (RC1)             |
| <b>MODULE</b>          | 10 -- HMI              |
| <b>QTY</b>             | 1                      |
| <b>MATERIAL</b>        | PETG (PA12 prod)       |
| <b>INFILL</b>          | 100%, 4 walls          |
| <b>LAYER</b>           | 0.2 mm                 |
| <b>MASS</b>            | ~123 g                 |
| <b>PRINT</b>           | flat, ~3.5 h           |
| <b>DIMENSIONS (mm)</b> |                        |
| Plate                  | 180 x 5 x 130          |
| Tab band (top)         | 18 mm                  |
| Beam bolts             | 4x M5 at X=+/-33,+/-55 |
| Beam bolt Z            | 123 (from bottom)      |
| Screen windows         | 4x 30 x 30 mm          |
| Window PCD             | 80 x 64 (ELECROW)      |
| PCD range              | X 50-110, Y 34-94      |
| Cable cutout           | 30 x 10 (bottom)       |
| Screen size            | 164.9 x 102 x 34.7     |

Back View (screen side)

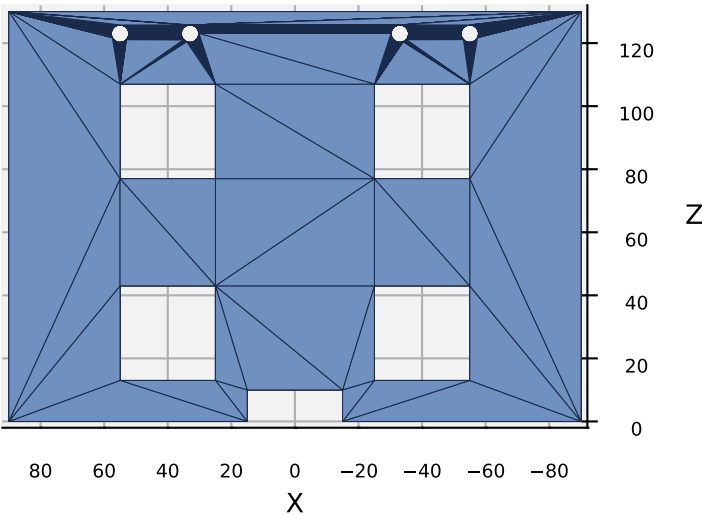

Side View -- 5 mm thickness



ASSEMBLY

1. Print PETG flat, 100% infill, 4 walls, BACK face up (clean window edges)
2. Thread 4x brass pillars (ELECROW kit) INTO screen back at PCD 79.45 x 64.4 mm
3. Hold screen behind frame; pass 4x M2.5 screws + ~10 mm fender washer through the corner windows from FRONT face into the pillars; snug
4. HDMI + USB-C cables hide in pillar gap
5. Route cables DOWN through bottom cutout
6. Bolt 4x M5 x 12 socket-head from FRONT into beam FRONT-face inserts at X = +/-33, +/-55 (skip middle pair)
7. Route HDMI + USB-C up rear mast face, through beam cable channel, to Pi Carrier

PCD COVERAGE (also fits):  
\* VESA-75 (75 x 75)  
\* Raspberry Pi displays (58 x 49)  
\* Generic 7" HDMI LCDs within range

WALL CHECK: all 10 OK