Features

- Dimming port programming without driver power on
- CC/CV hybrid output
- High efficiency (Max 95%), active power factor correction
- Ultra low THD at light load
- Isolated 0~10V/ PWM dimming, Dim to off option
- 12V/200mA AUX Output
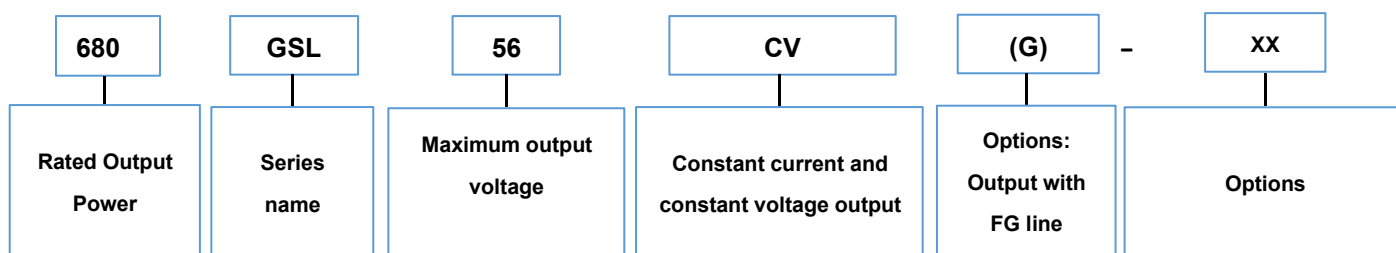- UL recognized with Class P

Description

680W LED Drivers offers digital programmable drivers with wide-range adjustable output current, together with 12V/200mA auxiliary output (optional) for smart lighting.

The output current of this series are programmable, and designed for 0-10V/PWM/Rset dimming applications.

Model Name Definition

680	GSL	56	CV	(G)	–	XX
Rated Output Power	Series name	Maximum output voltage	Constant current and constant voltage output	Options: Output with FG line		Options

Specifications

Part Number	Max. Output Power	Programmable Current Region@CC	Output Voltage Range	Programmable Voltage Region@CV	Efficiency @277VAC
680GSL48CV(G)	680W	6.63-16.59A	25-48V	42-48 V	95%
680GSL56CV(G)	680W	5.67-14.17A	28-56V	48-56 V	95%
680GSL80CV(G)	680W	4.00-10.00A	38-80V	64-80 V	95%
680GSL140CV(G)	680W	2.29-5.71A	67-140V	112-140V	95%
680GSL180CV(G)	680W	1.78-4.44A	84-180V	140-180 V	95%
680GSL240CV(G)	680W	1.33-3.33A	115-240V	192-240 V	95%
680GSL300CV(G)	680W	1.07-2.67A	144-300V	240-300V	95%
680GSL375CV(G)	680W	0.85-2.13A	180-375V	300-375V	95%
680GSL460CV(G)	680W	0.7-1.74A	225-460V	375-460V	95%

Suffix "-XX" Function Optional Model Table

-XX	Input Interface	Output Interface	Dimming Interface
NC	UL 18# wire	UL 14# wire	UL 22# wire

-CL	LLT M19 3 pins male	LLT M19 3 pins female	LLT M16 3 pins female
-CQ	Chogori Middle 3 pins male	Chogori Middle 3 pins female	Chogori 500 3 pins female
-CLW	LLT M19 3 pins male	LLT M19 3 pins female	RJ12 6P6C *2
-CQW	Chogori Middle 3 pins male	Chogori Middle 3 pins female	RJ12 6P6C *2
-C14LW	C14	LLT M19 3 pins female	RJ12 6P6C *2
-C2L	LLT M25 3 pins male * 2	LLT M19 3 pins female	LLT M16 3 pins female
-C2Q	Chogori Large 3 pins male * 2	Chogori Middle 3 pins female	Chogori 500 3 pins female
-C2LW	LLT M25 3 pins male * 2	LLT M19 3 pins female	RJ12 6P6C *2
-C2QW	Chogori Large 3 pins male * 2	Chogori Middle 3 pins female	RJ12 6P6C *2

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 Vac	-	305 Vac	127~300 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	1.0 mA	At 277Vac / 60Hz input , grounding effectively
Input AC Current	-	-	2.8A	Measured at full load and 270 Vac input.
Inrush Current	-	-	65A	At 220Vac input, 25℃ cold start,
PF	0.95	-	-	At 100-277Vac, 60%-100% Load (144-240W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%Ioset	-	5%Ioset	At full load condition
Total Output Current Ripple (pk-pk)	-	10%Iomax	10%Iomax	At full load condition, 20 MHz BW
Startup Overshoot Current	-	-	10%Iomax	At full load condition
No Load Output Voltage		57		
Line Regulation	-	-	±1%	Measured at full load
Load Regulation	-	-	±1%	
Turn-on Delay Time	-	0.8 s	1.5 s	Measured at 120Vac and 220Vac input.
Temperature Coefficient of Ioset	-0.03%/°C	-	0.03%/°C	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	11V	12 V	15 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Dim−"
OTP Tc	85°C	90°C	100°C	Output current will drop to 50%
SCP				Hiccup mode, Auto recover

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Standby power	-	-	1 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	234,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK- 217F)

Lifetime	-	97,000 Hours	-	Measured at 220Vac input, 80%Load and 60°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc_s	-40°C	-	90 C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	50°C	
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions				
Inches (L × W × H)		13.75 × 4.18 × 2.32		
Millimeters (L × W × H)		349.2 × 106.2 × 59		
Net Weight	-	3.5kg	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-1 V	-	15 V	
Source Current on Vdim (+)Pin	90 uA	100 uA	110 uA	
Dimming Output Range	10%Ioset	-	Ioset	80%Iomax ≤ Ioset ≤ 100%Iomax
	8%Iomax	-	Ioset	Ioset ＜80%Iomax
Recommended Dimming Input Range	0 V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage	0.3 V	0.5 V	0.8V	
Dim on Voltage	0.5V	0.7 V	1 V	
Hysteresis	-	0.2 V	-	
PWM_in High Level	9.8 V	10V	10.2 V	
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	200 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	100%	
PWM Dimming off	3%	5%	7%	
PWM Dimming on	5%	7%	9%	

Safety &EMC Compliance

Safety Category	Standard
UL/CUL	UL8750,CAN/CSA-C22.2 No. 250.13-12
EMI Standards	**Notes**
FCC Part 15	ANSI C63.4:2009 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation.

EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT: level 3, criteria A
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Performance Curve

Temperature Derating Curve

Input Voltage Derating Curve

Efficiency Vs Different Loads

Power Factor Vs Different Loads
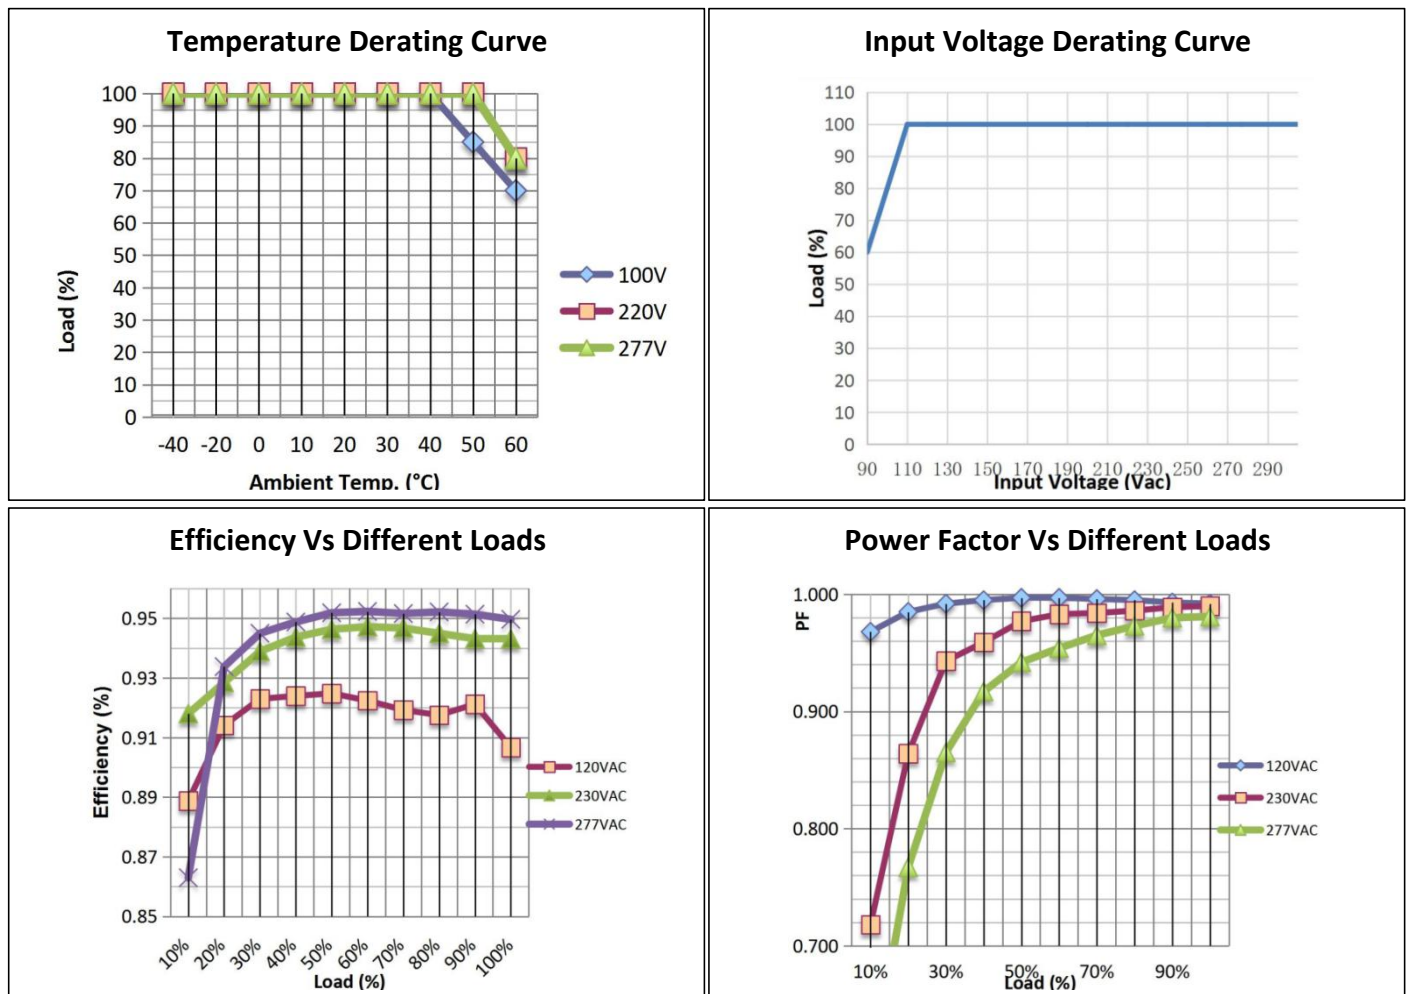
Total Harmonics Vs Different Loads
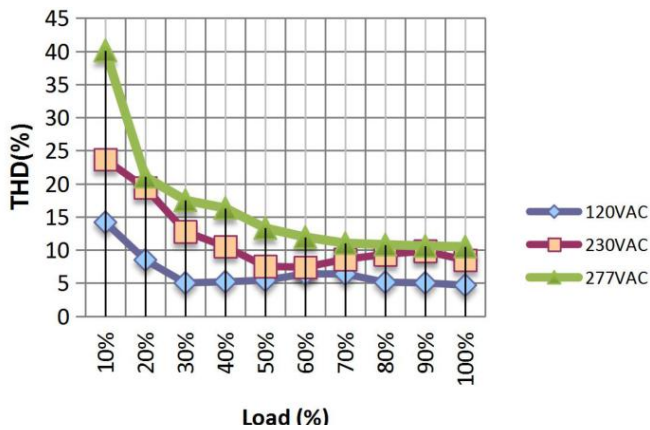
Life Vs Shell Temperature
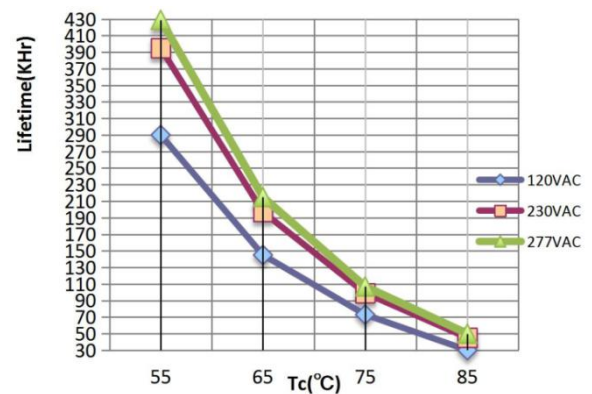
0-10V Analog Dimming &PWM Dimming
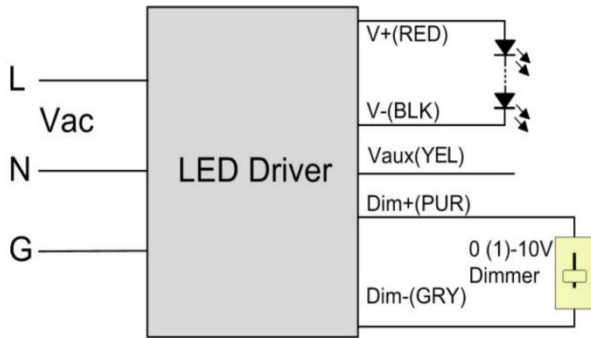
Io/Ir vs Vdim
0-10V
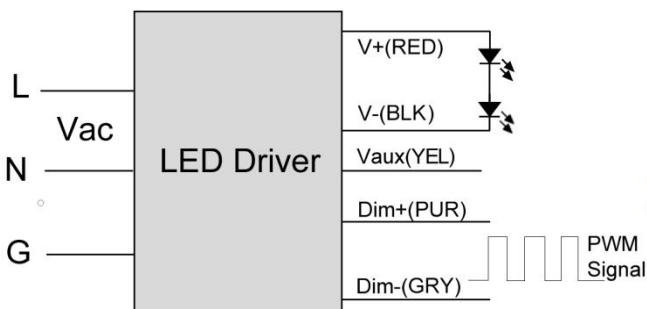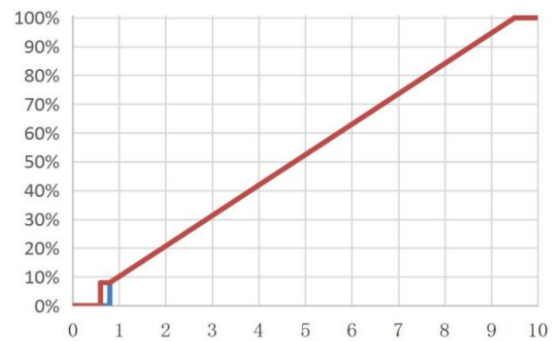
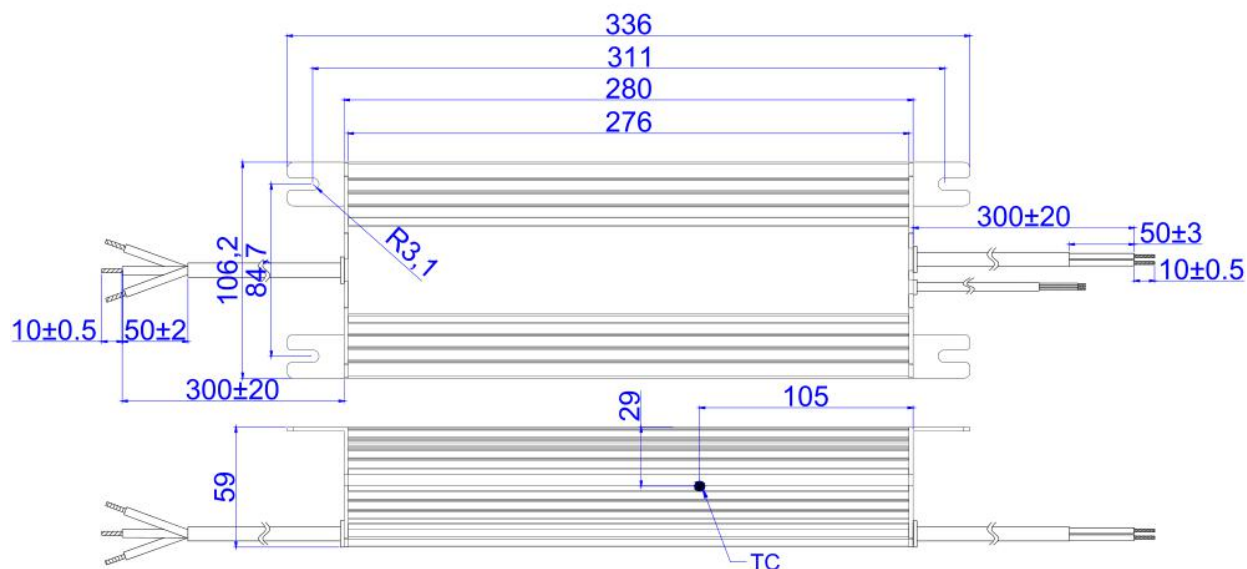## Io/Ir vs Vdim
PWM
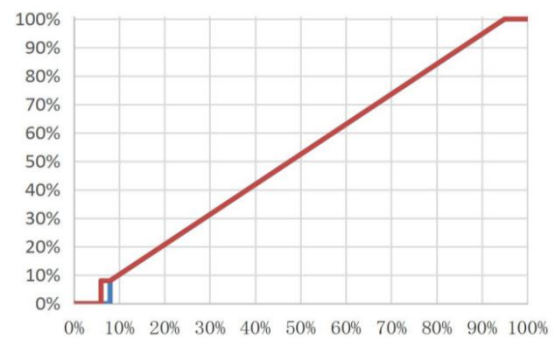
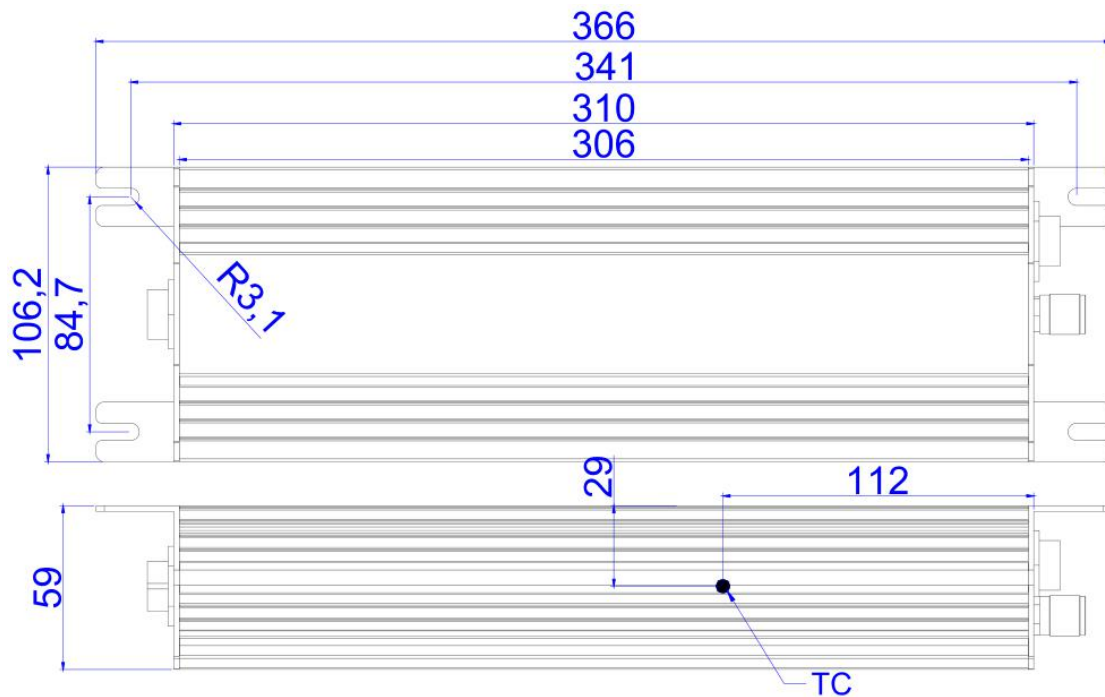## Programming wiring diagram
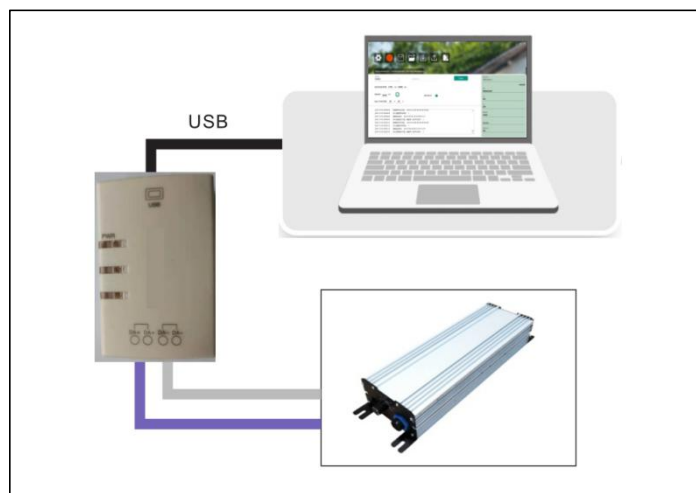
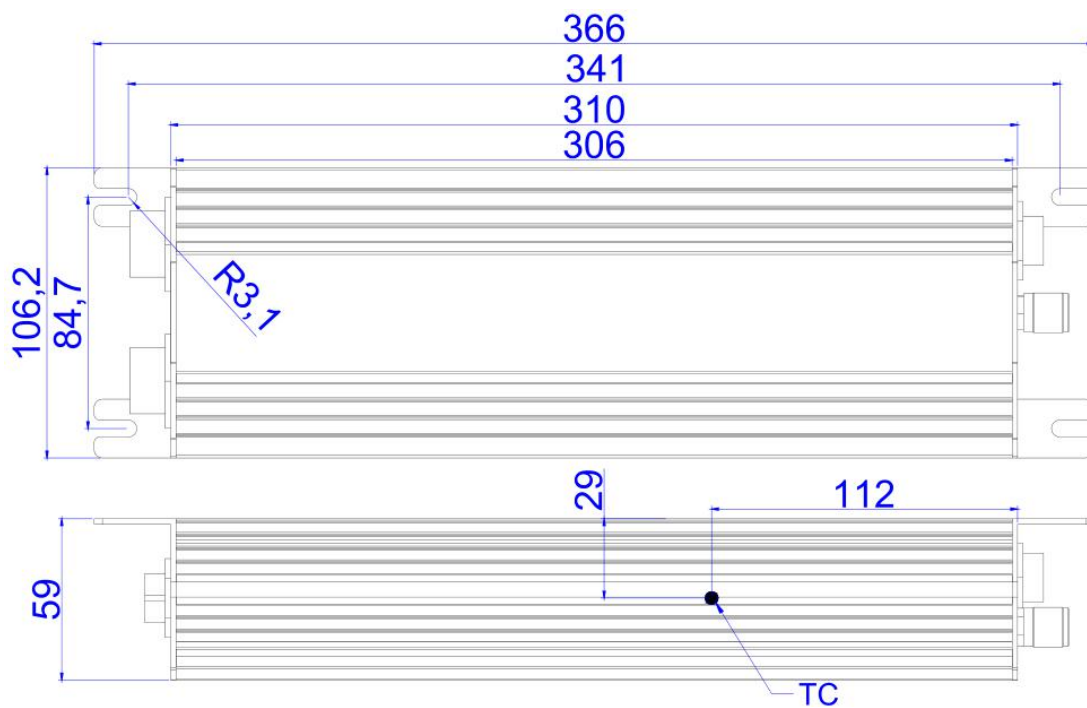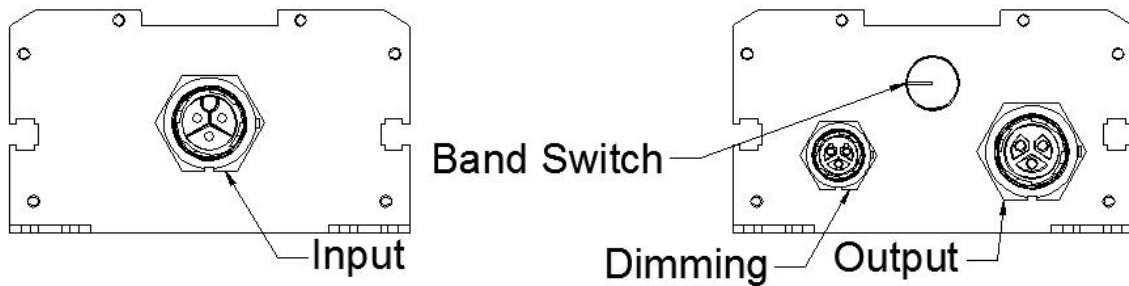## MECHANICAL SPECIFICATION

No Suffix Model Mechanical Drawing
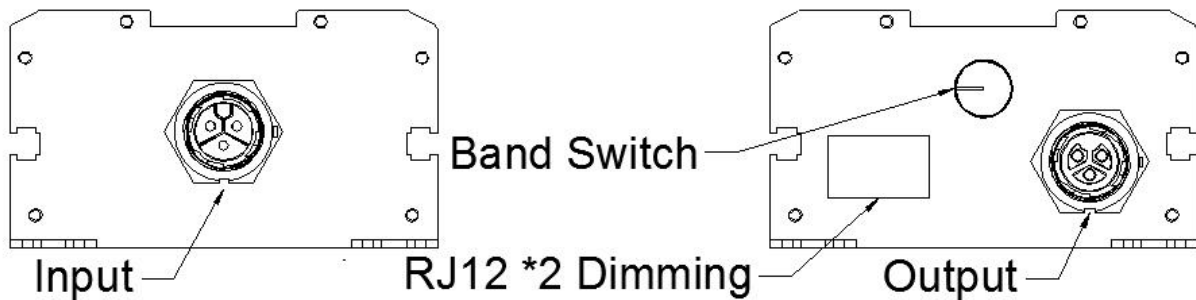
-CL/-CQ/-CLW/-CQW Model Mechanical Drawing
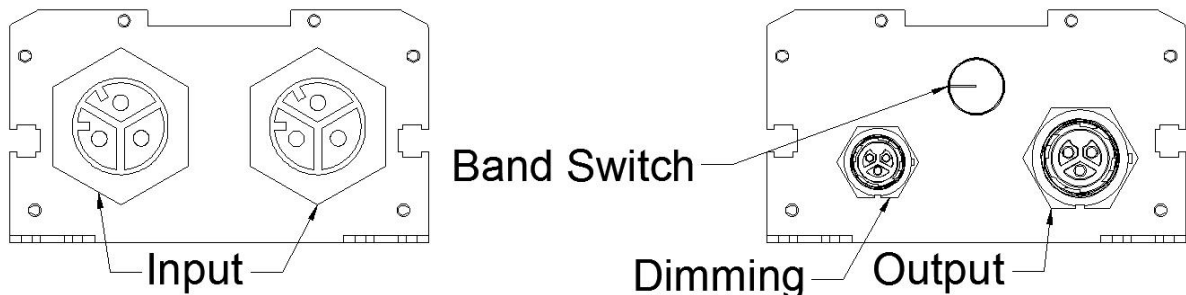

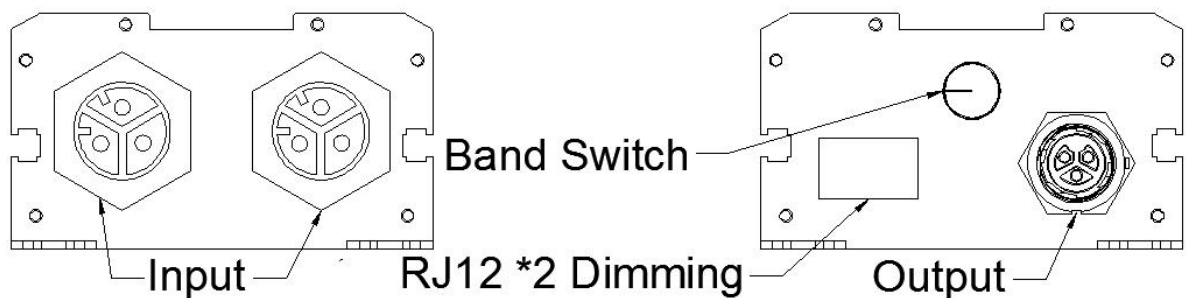**-C2L/-C2Q/-C2LW/-C2QW Model Mechanical Drawing**

-CL/-CQ End Cap

Input — Band Switch — Dimming — Output

-CLW/-CQW End Cap

Input — Band Switch — RJ12 *2 Dimming — Output

-C2L/-C2Q End Cap

Input — Band Switch — Dimming — Output

-C2LW/-C2QW End Cap

Input — Band Switch — RJ12 *2 Dimming — Output

-C14LW Model Mechanical Drawing

Band Switch

RJ12 *2 Dimming

Input

Output

349,2
339,2
334,2
328,2
310
306

106,2
97
84,7

R2,5

C14 Male

Ø5

29

TC

59

112
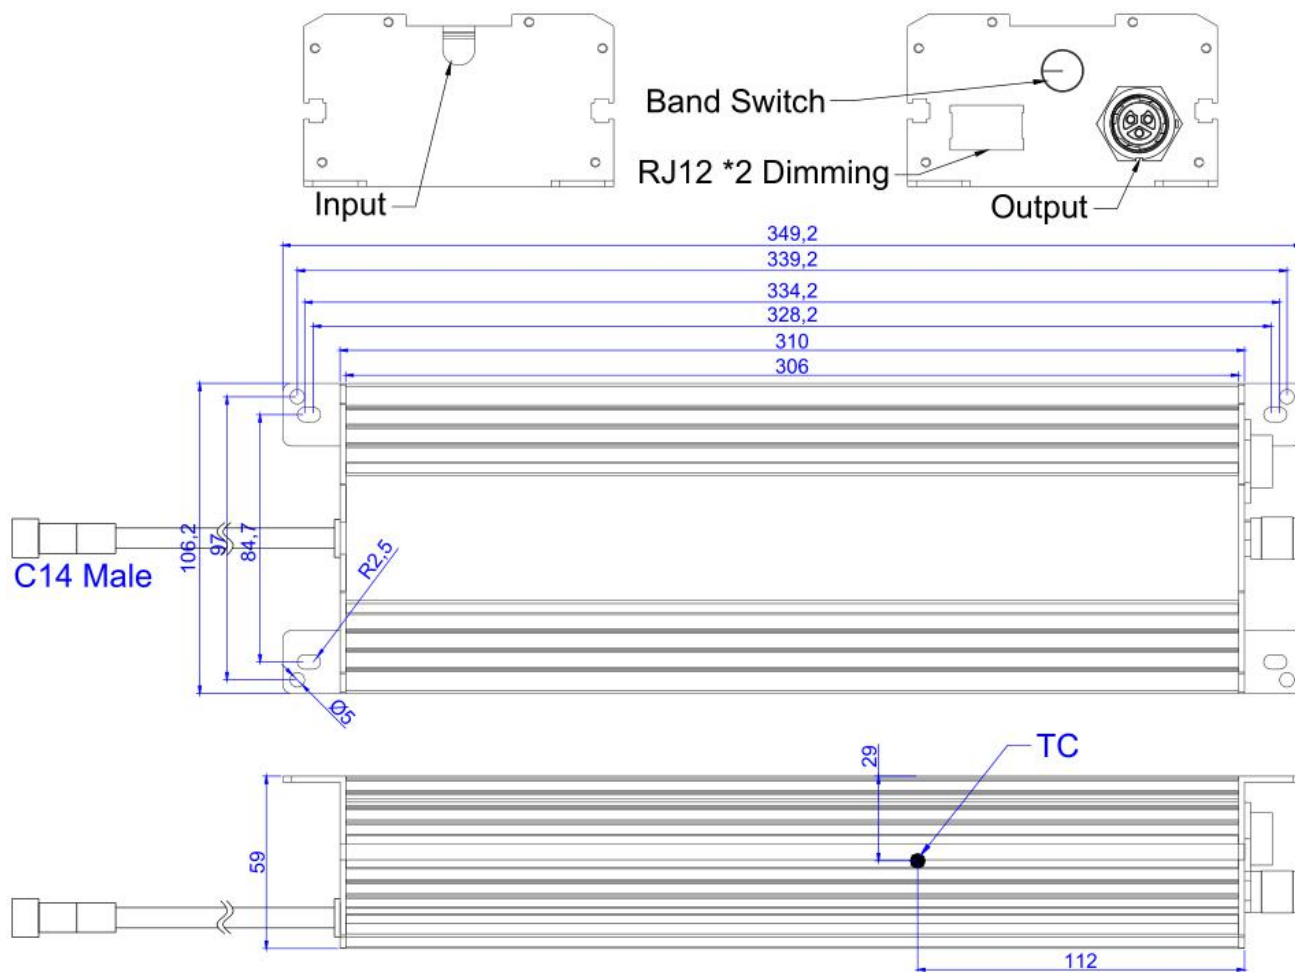
-CL/-CQ/-CLW/-CQW/-C2L/-C2Q/-C2LW/-C2QW Model Knob Switch Screen Printing

60%

40%   80%

20%   100%
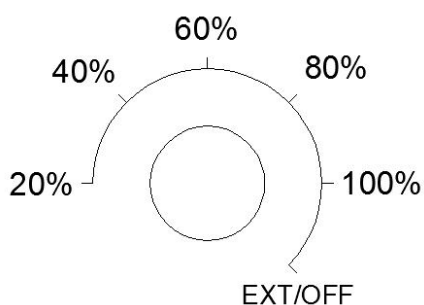
EXT/OFF

-C14LW Model Knob Switch Screen Printing

60%

40%   80%

20%   100%
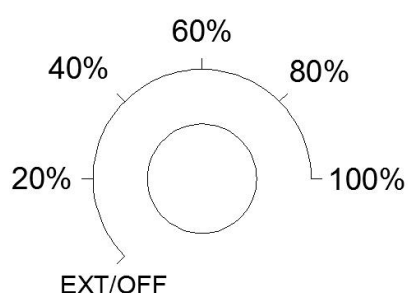
EXT/OFF

Band Switch Definition	
Tap Position	Definition
EXT/OFF	No output when dimming port not connect to the dimmer, Dimming enable when dimmer connected.
20%	20%±10% Output Current, 0-10V/PWM dimming disable
40%	40%±10% Output Current, 0-10V/PWM dimming disable
60%	60%±10% Output Current, 0-10V/PWM dimming disable
80%	80%±10% Output Current, 0-10V/PWM dimming disable
100%	100%±5% Output Current

RJ12 Interface
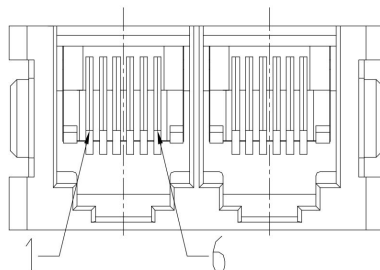
Pin	Definition
1，6	12V
2，5	0-10V
3，4	GND

Revision History

Change Date	Rev.	Description of Change		
		Item	**From**	**To**
2020.12.22	V1.0			
2021.1.8	V1.1	Add programming wiring diagram		
2021.2.3	V1.2	Add -C2L/-C2Q/-C2LW/-C2QW Model		
		Add RJ12 Interface definition		
		Update mechanical specification		