

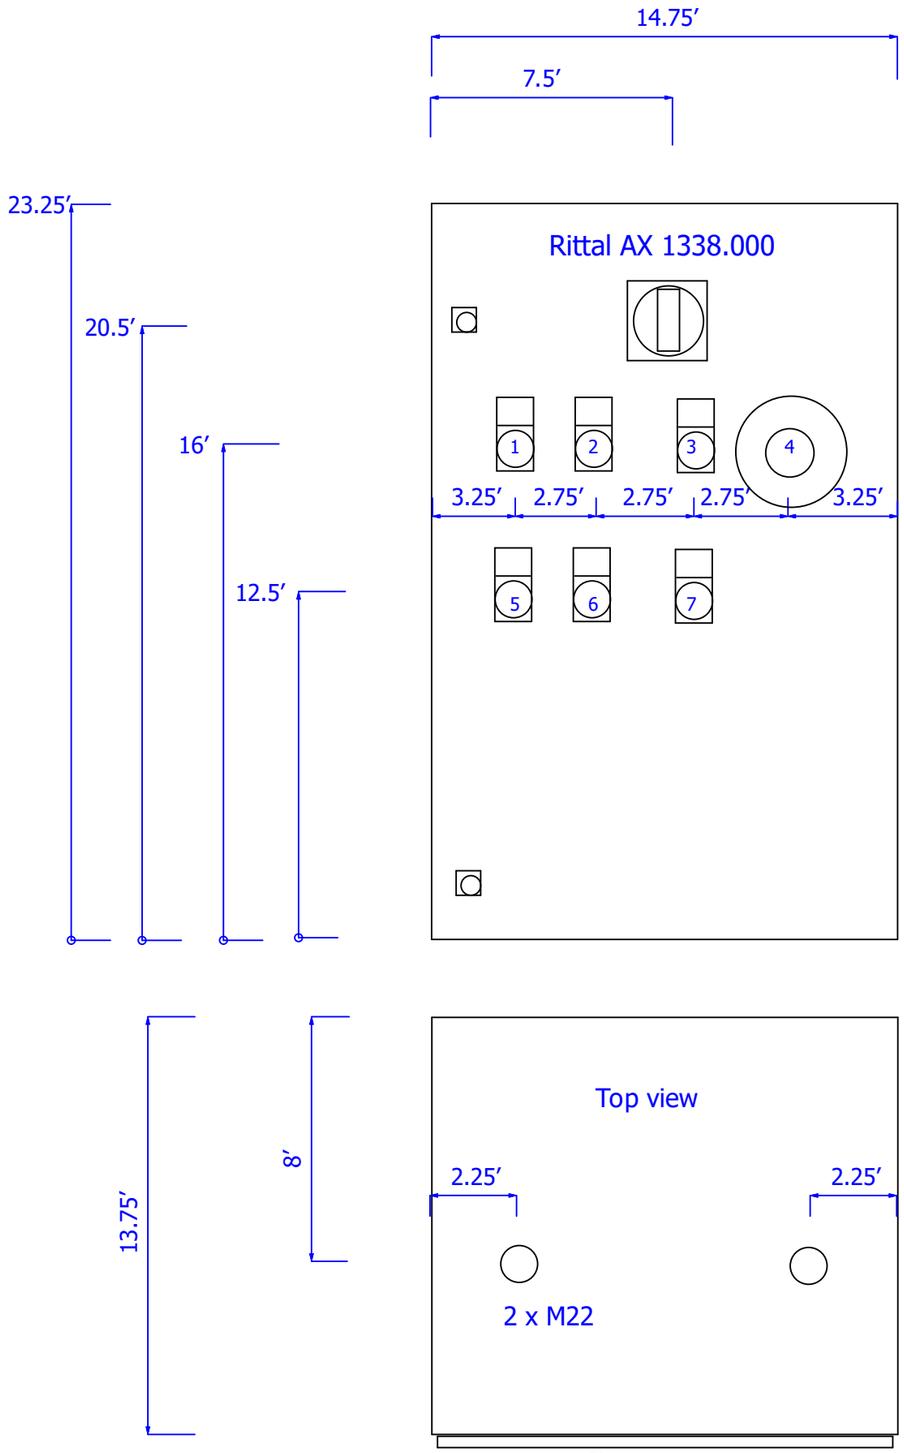
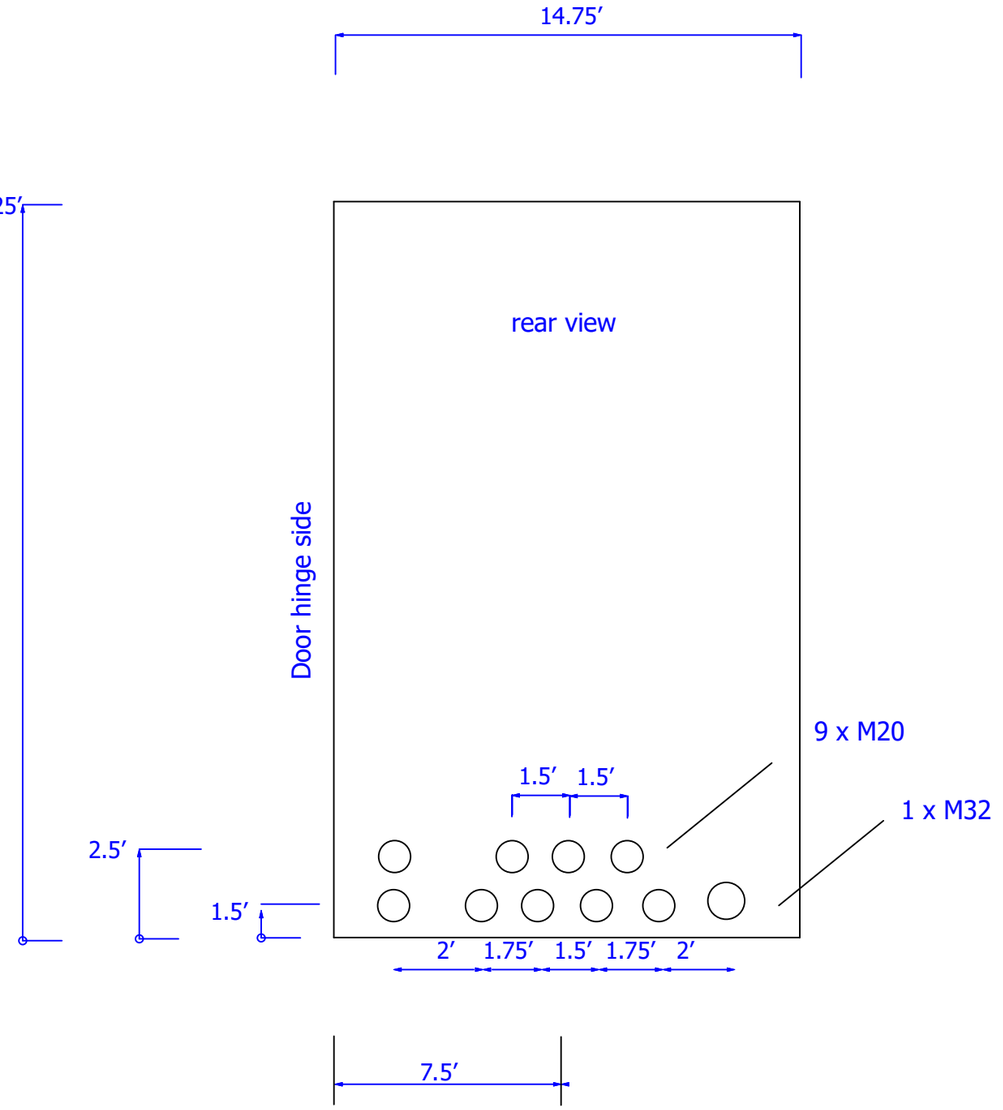


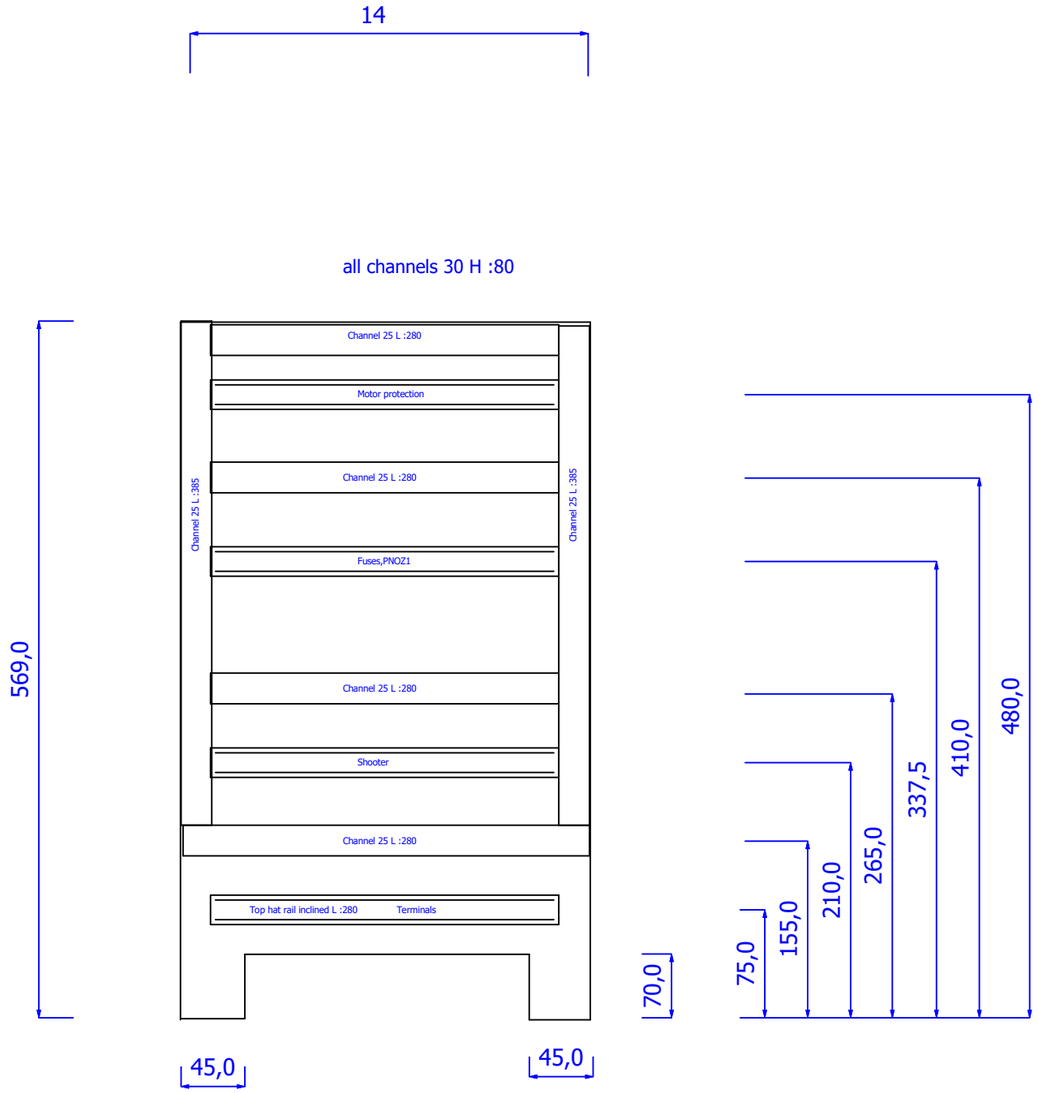


Version	V01_00		Modification	03.01.2025	Wegmann rolling machine	WEGMANN automotive engineering	Bottom Enclosure +S1_G
Date			Edited by	AW			
Creator			Checked	AW			V01_00


+ S


14
all channels 30 H :80
Channel 25 L :280
Motor protection
Channel 25 L :280
Channel 25 L :385
Channel 25 L :385
Fuses,PNOZ1
Channel 25 L :280
Shooter
Channel 25 L :280
Top hat rail inclined L :280
Terminals
569,0
70,0
75,0
155,0
210,0
265,0
337,5
410,0
480,0
45,0
45,0

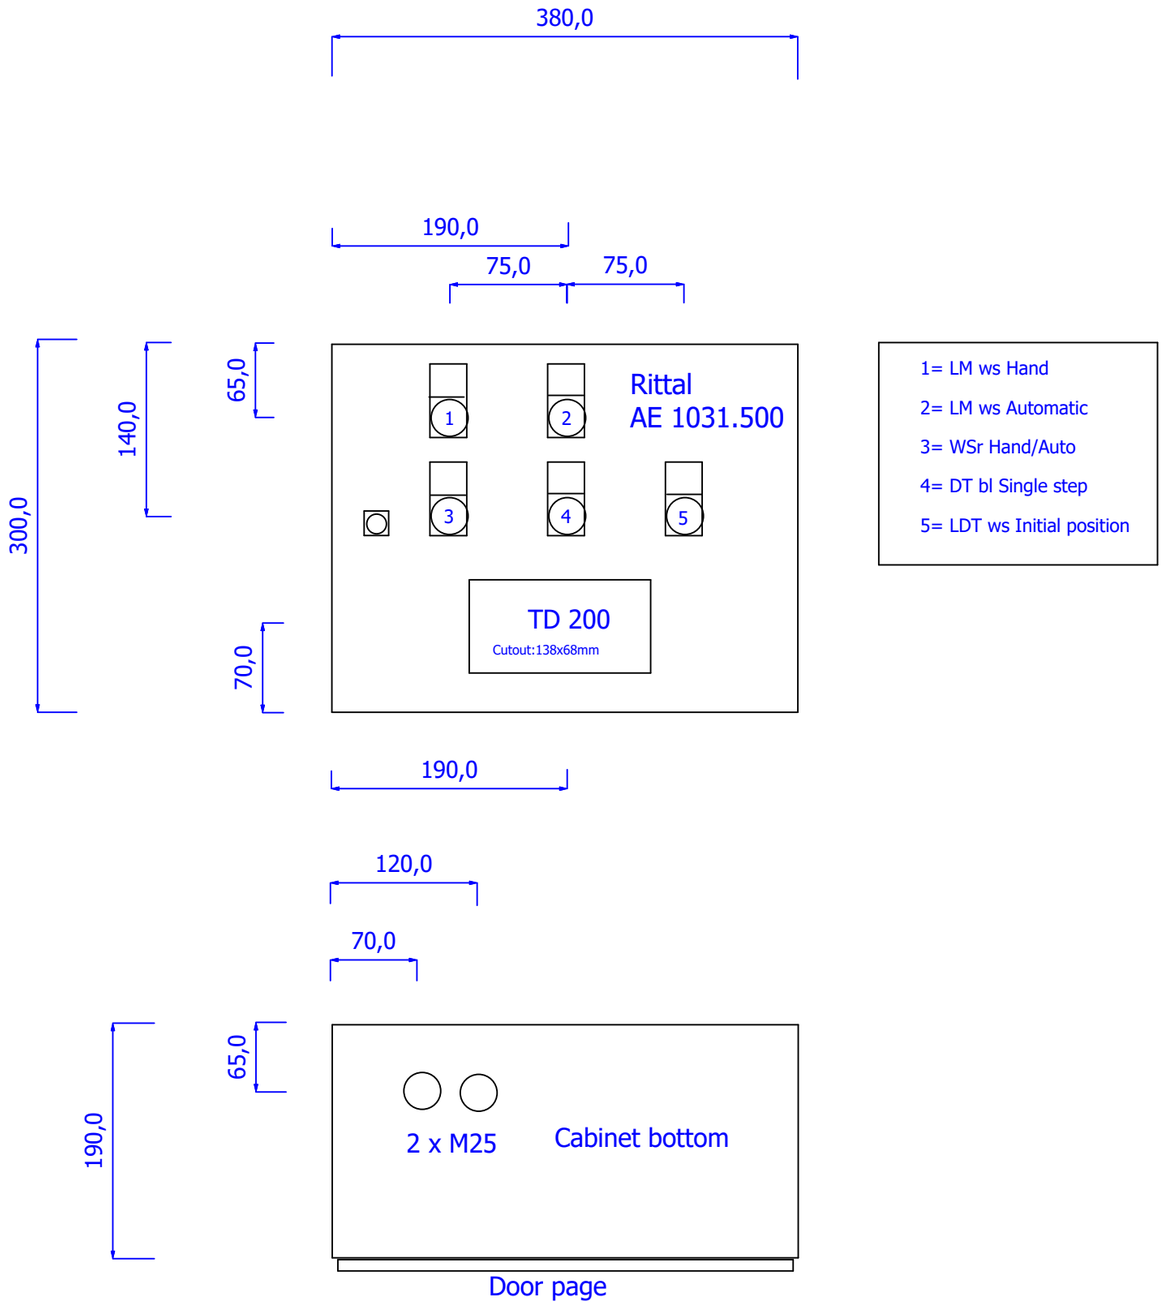

1= LM ws Hand
2= LM ws Automatic
3= WSr Hand/Auto
4= DT bl Single step
5= LDT ws Initial position

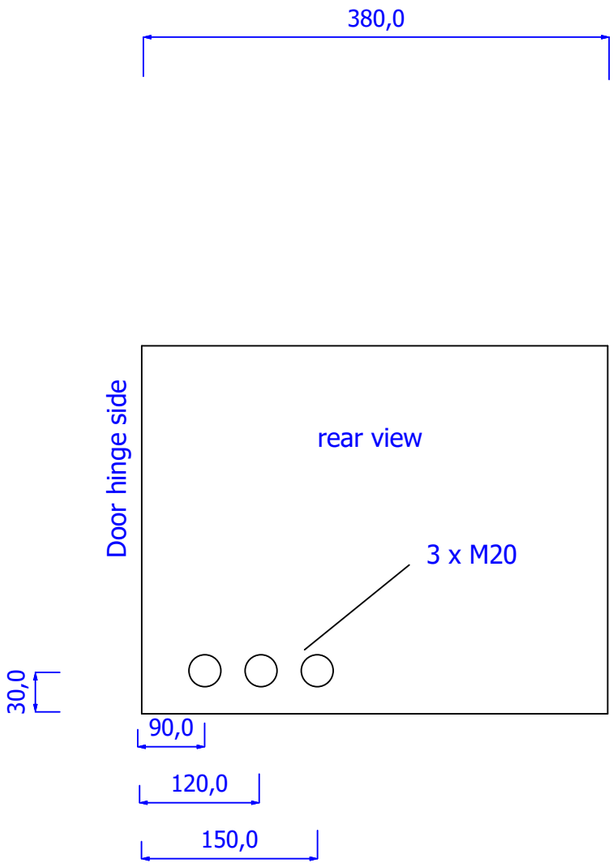

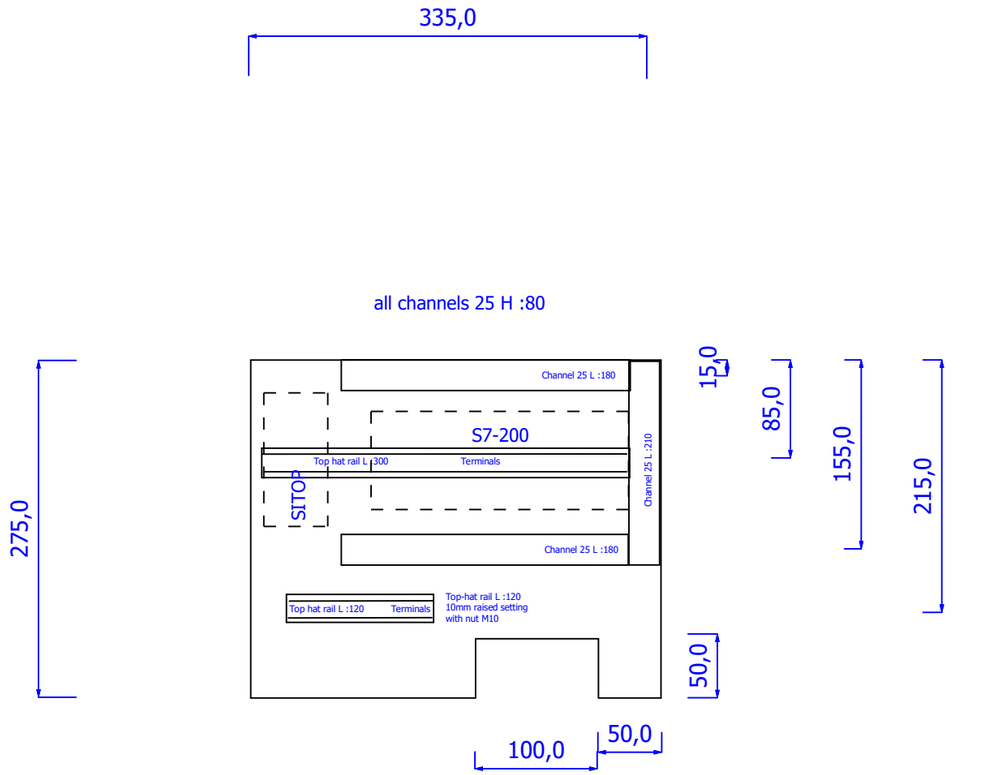
335,0
all channels 25 H :80
275,0
Channel 25 L :180
S7-200
Top hat rail L :300
Terminals
SITOP
Channel 25 L :210
Channel 25 L :180
Top hat rail L :120
Terminals
Top-hat rail L :120
10mm raised setting
with nut M10
15,0
85,0
155,0
215,0
50,0
100,0
50,0

	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S-S1_G =+S/40.4	AX 1338.000 RIT-1338000	AX compact cabinet (WxHxD) 380x600x350mm, 1-door, with mounting plate, with 1 gland plate, painted	Rittal	GCG	
=+S-S1_K =+S/42.4	AX 1031.500 RIT-1031500	AX compact cabinet (WxHxD) 380x300x210mm, 1-door, with mounting plate, with 1 gland plate, painted	Rittal		
=+S1-3A1 =+S1/3.0	FX5UC-32MR/DS-TS FX5UC-32MR/DS-TS	MELSEC IQ-F FX5UC Series PLC, 32 I/O, 16DI 24VDC Sink, 16DO Rly. NO contacts 2A	Mitsubishi		
=+S1-3A1 =+S1/5.0	FX5-C32ET/DSS-TS FX5-C32ET/DSS-TS	MELSEC F (FX) Series, 32 I/O, 16DI 24Vdc, 16DO 24Vdc Source	Mitsubishi		
=+S1-3A2 =+S1/6.0	GS2107-WTBD-N GS2107-WTBD-N	GS21 GOT Simple Series HMI, 7” screen 800x480 pixels	Mitsubishi		
=+S1-1F1 =+S1/1.0	CP30BA3P2M10A CP30BA3P2M10A	Miniature circuit breaker (WS-V series) - curve M - three-pole - 10 A/250 V AC	Mitsubishi		
=+S1-1F3 =+S1/1.8	CP30BA1P1M7A CP30BA1P1M7A	Miniature circuit breaker (WS-V series) - curve M - single pole - 7 A/250 V AC	Mitsubishi		
=+S1-2F2 =+S1/2.1	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F4 =+S1/2.5	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F5 =+S1/2.6	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2F6 =+S1/2.6	CP30BA1P1M2A CP30BA1P1M2A	Miniature circuit breaker (WS-V series) - curve M - single pole - 2 A/65 V DC	Mitsubishi		
=+S1-2H1 =+S1/2.4					
=+S1-4H0.1 =+S1/4.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-4H0.1 =+S1/4.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-4H0.1 =+S1/4.3	M22-L-R MOE.216772	Indicator lamp, red, flat			
=+S1-4H0.1 =+S1/4.3	M22-LED-R MOE.216558	LED element, red, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power 0,26W			
=+S1-6H1 =+S1/6.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-6H1 =+S1/6.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-6H1 =+S1/6.3	M22-L-W MOE.216771	Indicator lamp, white, flat			


	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S1-6H1 =+S1/6.3	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-6H2 =+S1/6.3	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-6H2 =+S1/6.3	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-6H2 =+S1/6.3	M22-L-W MOE.216771	Indicator lamp, white, flat			
=+S1-6H2 =+S1/6.3	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-7H1 =+S1/7.2					
=+S1-7H1.1 =+S1/7.3					
=+S1-7H1.2 =+S1/7.3					
=+S1-7H3/4 =+S1/7.5					
=+S1-7H5 =+S1/7.6	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=+S1-8H1 =+S1/8.4					
=+S1-1K1 =+S1/7.1	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K1 =+S1/7.1	3RH2911-1HA12 SIE.3RH2911-1HA12	AUXILIARY SWITCH BLOCK, 22E,1S+2OE, DIN EN 50012, SCREW TERMINALS, FOR MOTOR	Siemens		
=+S1-1K1 =+S1/7.1	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K2 =+S1/7.2	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K2 =+S1/7.2	3RH2911-1HA12 SIE.3RH2911-1HA12	AUXILIARY SWITCH BLOCK, 22E,1S+2OE, DIN EN 50012, SCREW TERMINALS, FOR MOTOR	Siemens		
=+S1-1K2 =+S1/7.2	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K3 =+S1/7.4	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K3 =+S1/7.4	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		

	Mfg. Part No. Vendor Part No.	Item Desc.	Manufacturer	Vendor	
=+S1-1K4 =+S1/7.4	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K4 =+S1/7.4	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K5 =+S1/7.5	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K5 =+S1/7.5	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-1K6 =+S1/7.6	3RT2016-1BB41 SIE.3RT2016-1BB41	CONTACTOR, AC-3, 4KW/400V, 1S, DC 24V, 3PIN, BGR. S00, SCREW TERMINAL	Siemens		
=+S1-1K6 =+S1/7.6	3RT2916-1DG00 SIE.3RT2916-1DG00	SUPPRESSOR DIODE, DC 12...250V, OVERVOLTAGE LIMITER, FOR MOUNTING ON CONTACTORS, BGR.	Siemens		
=+S1-2K1 =+S1/2.4	PSR-SCP- PHO.2963763	2-channel safety relay for emergency stop and safety door circuits, 3 NO contact, 1 NC contact, undelayed,	PHOENIX CONTACT GmbH & Co. KG		
=+S1-1Q1 =+S1/1.0	T0-2-1/EA/SVB MOE.038873	Main switch as emergency stop device, for front mounting, 20A, 3-pole	Eaton		
=+S1-1Q2 =+S1/1.2	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q2 =+S1/1.2	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+1OE, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q3 =+S1/1.3	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q3 =+S1/1.3	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+1OE, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q4 =+S1/1.5	MMP-T32 4.0A MMP-T32 4.0A	CIRCUIT BREAKER FOR MOTOR PROTECTION, EXCL. 2,5...4A, N-EXT. 3 Pole, SCREW	Mitsubishi		
=+S1-1Q4 =+S1/1.5	xxx xxx	AUXILIARY SWITCH CROSSWISE, 1S+1OE, FOR CIRCUIT BREAKER, BGR. S00...S3	Mitsubishi		
=+S1-1Q5 =+S1/1.7					
=+S1-1Q5 =+S1/1.7					
=+S1-2S1 =+S1/2.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=+S1-2S1 =+S1/2.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=+S1-2S1 =+S1/2.4	M22-D-R MOE.216594	Pushbutton, red, flat, tactile, front ring titanium			

=WAMA 02 09+S1-2S1 =WAMA 02 09+S1/2.4	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-PV MOE.216876	Emergency stop button, unlit, reset by pulling			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			
=WAMA 02 09+S1-2S2 =WAMA 02 09+S1/2.4	M22-XBK1 MOE.216483	Emergency stop sign, round (d) 60mm, in four languages (de, en, fr, it), plastic, golden yellow			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-2S4 =WAMA 02 09+S1/2.8	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-D-R MOE.216594	Pushbutton, red, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.0 =WAMA 02 09+S1/4.1	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.2 =WAMA 02 09+S1/4.4	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			

=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.3 =WAMA 02 09+S1/4.4	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-DL-G MOE.216927	illuminated pushbutton, green, flat, tactile, front ring titanium			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-4S0.4 =WAMA 02 09+S1/4.5	M22-LED-G MOE.216559	LED element, green, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.0 =WAMA 02 09+S1/6.1	M22-D-B MOE.216600	Push button IP67			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-WRK MOE.216867	Selector button, white, toggle handle, two positions 0-I, detent, 60°, front ring titanium			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.1 =WAMA 02 09+S1/6.2	M22-K01 MOE.216378	Contact element, 1 NC contact, front mounting, screw terminals			

=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-LED-W MOE.216557	LED element, white, front mounting, screw terminals, voltage 12-30V AC/DC, current 8-15mA, power			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-DL-W MOE.216922	illuminated pushbutton, white, flat, tactile, front ring titanium			
=WAMA 02 09+S1-6S2.2 =WAMA 02 09+S1/6.4	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-A MOE.216374	Mounting adapter, can be equipped with 3 contact elements			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22S-ST-X MOE.216392	Label holder (WxH) 30×50mm, for insert label (WxH) 27×18mm			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-WRK MOE.216867	Selector button, white, toggle handle, two positions 0-I, detent, 60°, front ring titanium			
=WAMA 02 09+S1-6S2.4 =WAMA 02 09+S1/6.5	M22-K10 MOE.216376	Contact element, 1 NO contact, front mounting, screw terminals			
=WAMA 02 09+S1-2V1 =WAMA 02 09+S1/2.1	6EP1333-2BA01 SIE.6EP1333-2BA01	SITOP SMART 120 W REGULATED POWER SUPPLY INPUT: AC 120/230 V OUTPUT: DC 24 V/5 A VERSION	Siemens		
=WAMA 02 09+S1-0X1 =WAMA 02 09+S1/1.0	CT516/6H ELK.CT516/6H	Cekon connector, 5-pin (3P+N+PE), voltage 400VAC, current 16A			

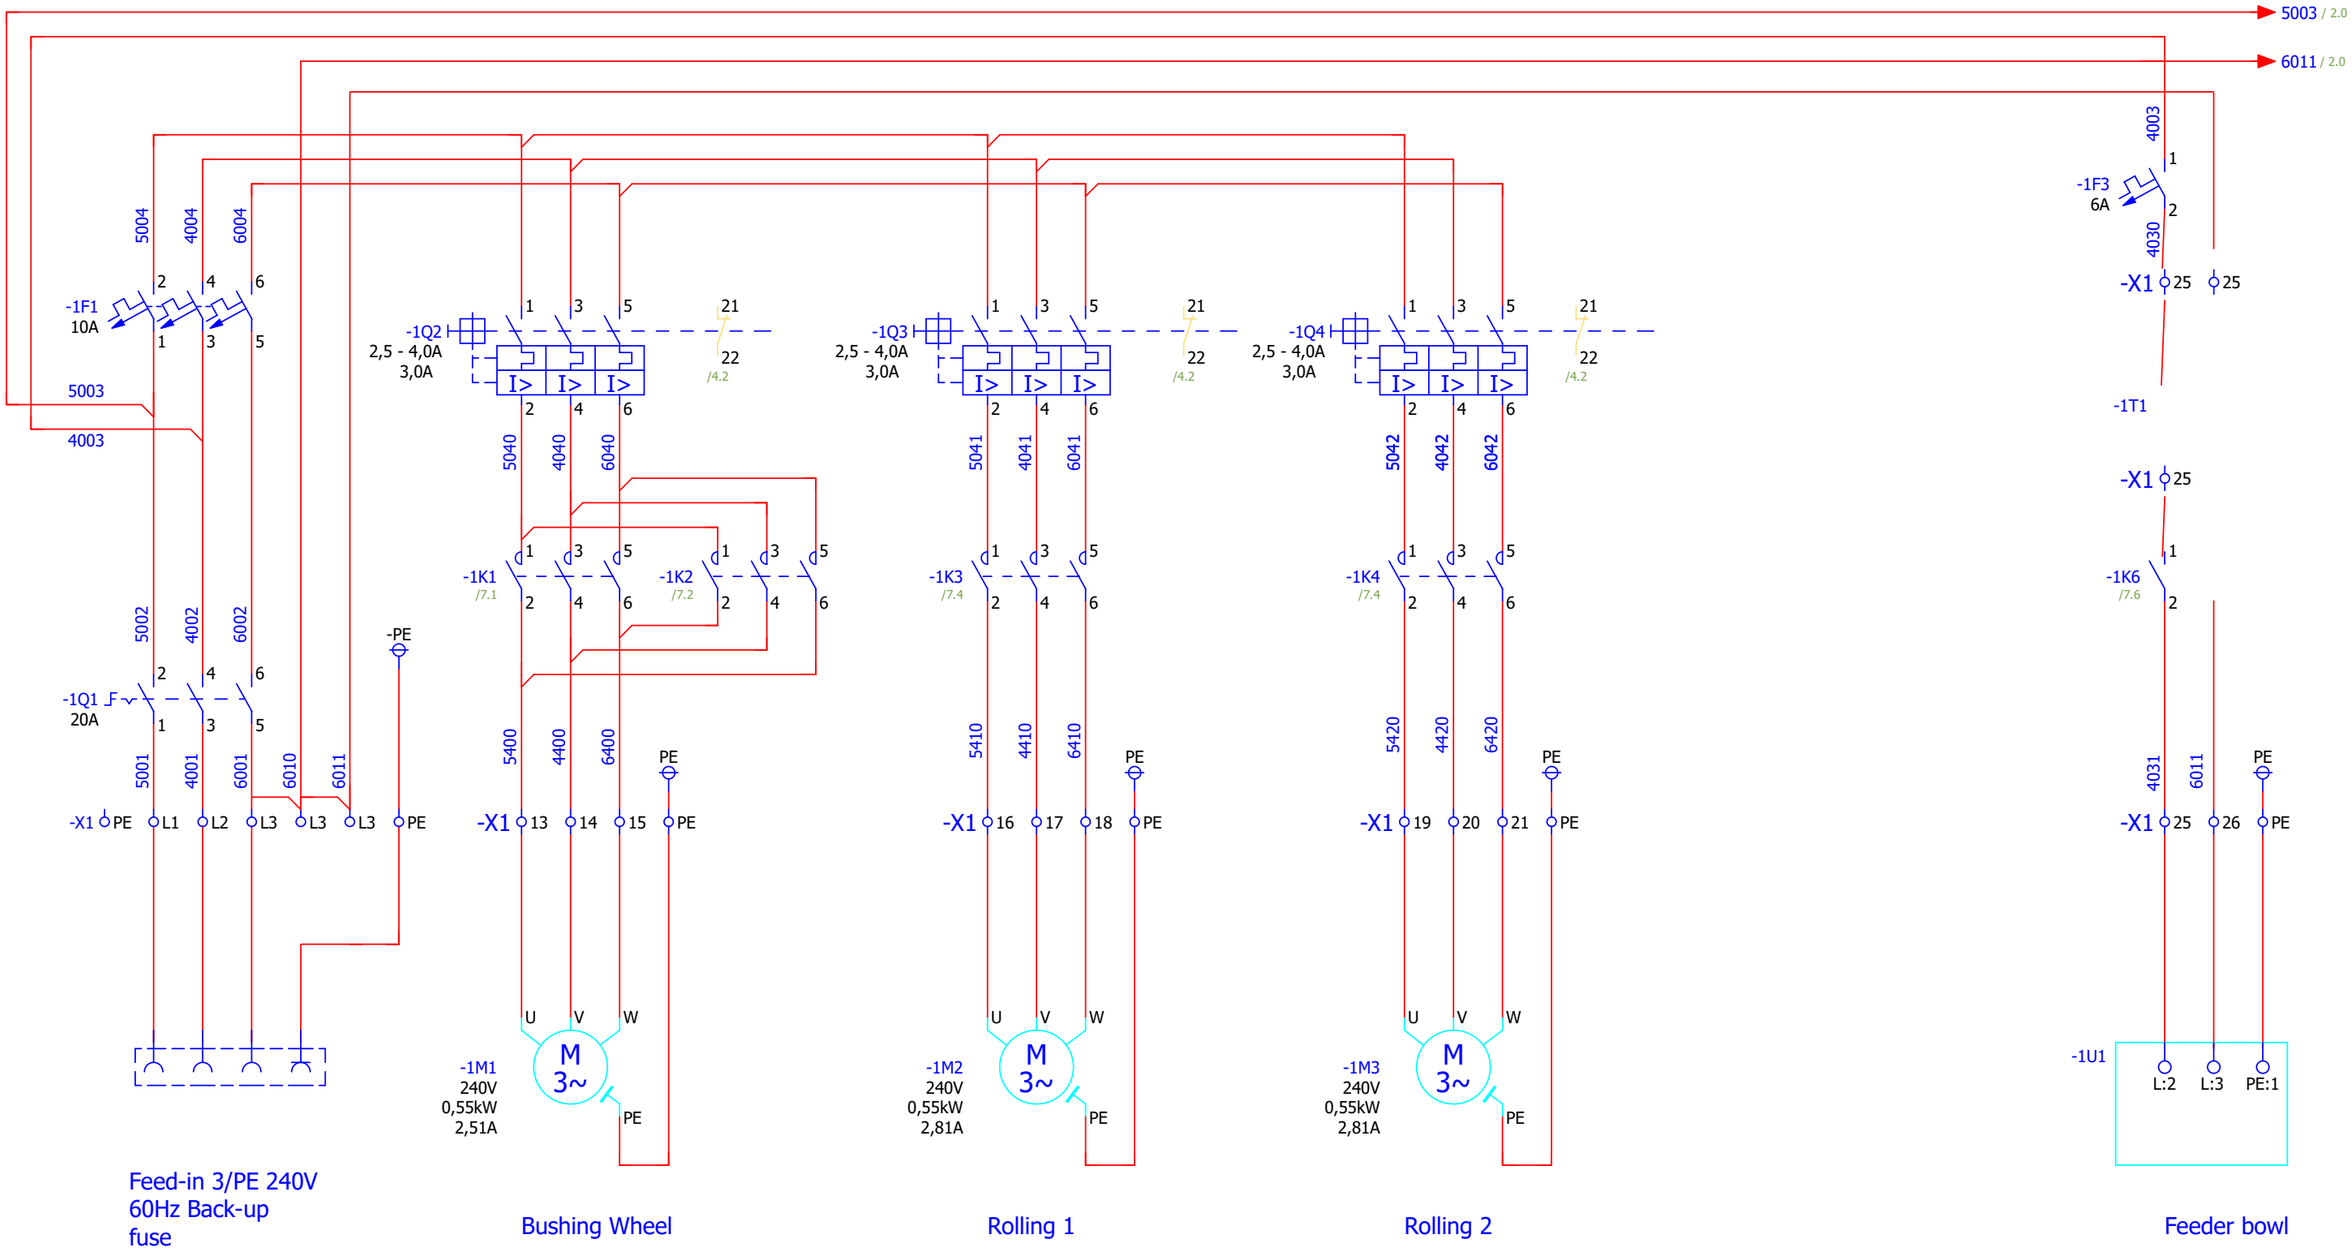

Feed-in 3/PE 240V
60Hz Back-up
fuse
max.16A

Bushing Wheel

Rolling 1

Rolling 2

Feeder bowl

+S/205

2

Version	V01_00		Modification	03.01.2025	
Date			Edited by	AW	
Creator			Checked	AW	

Wegmann
rolling machine


WEGMANN automotive engineering

Feed-in Back-up
fuse

V01_00

+ S1

Page. 1
from

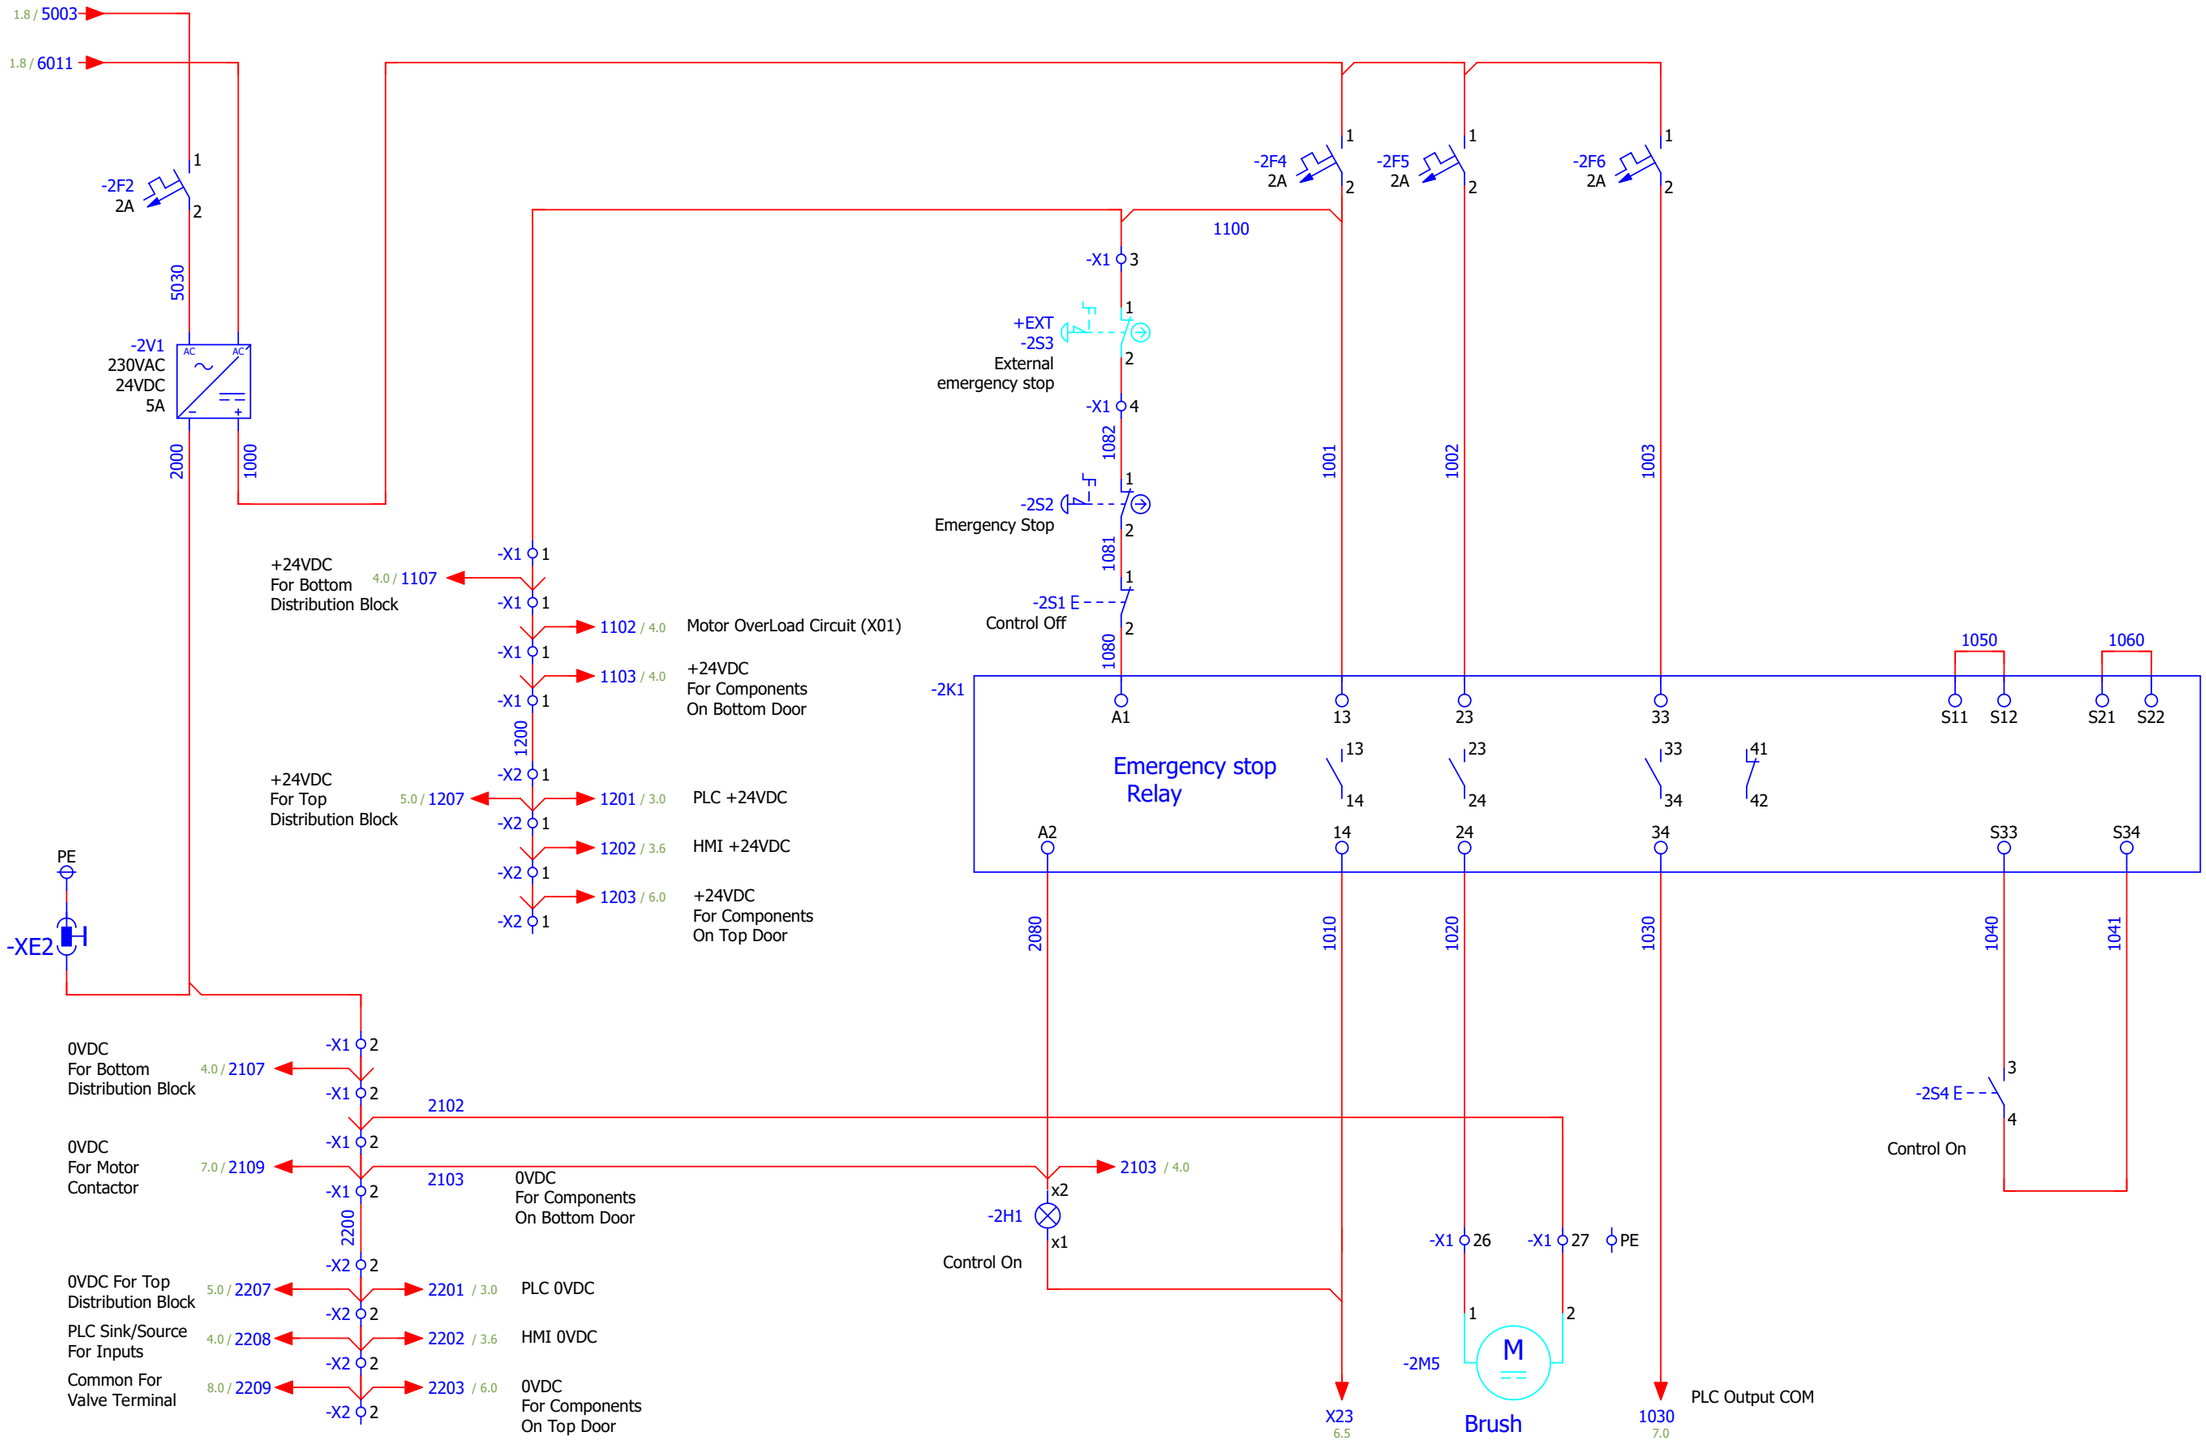

Version	V01_00		Modification	03.01.2025	
Date			Edited by	AW	
Creator			Checked	AW	

Wegmann
rolling machine

WEGMANN automotive engineering


24VDC
Potential distribution
emergency stop

V01_00

+ S1

Page. 2
from


2.2 / 1201
2.2 / 2201
PE
-3A1
/4.0
32 INPUTS
PE
-
+
MITSUBISHI
IP : 192.168.3.250
FX5UC-32MR/DS-TS
32 OUTPUTS
2.2 / 1202
2.2 / 2202
PE
-3A2
/6.0
MITSUBISHI
PE
-
+
IP : 192.168.3.18
GS2107-WTBD-N

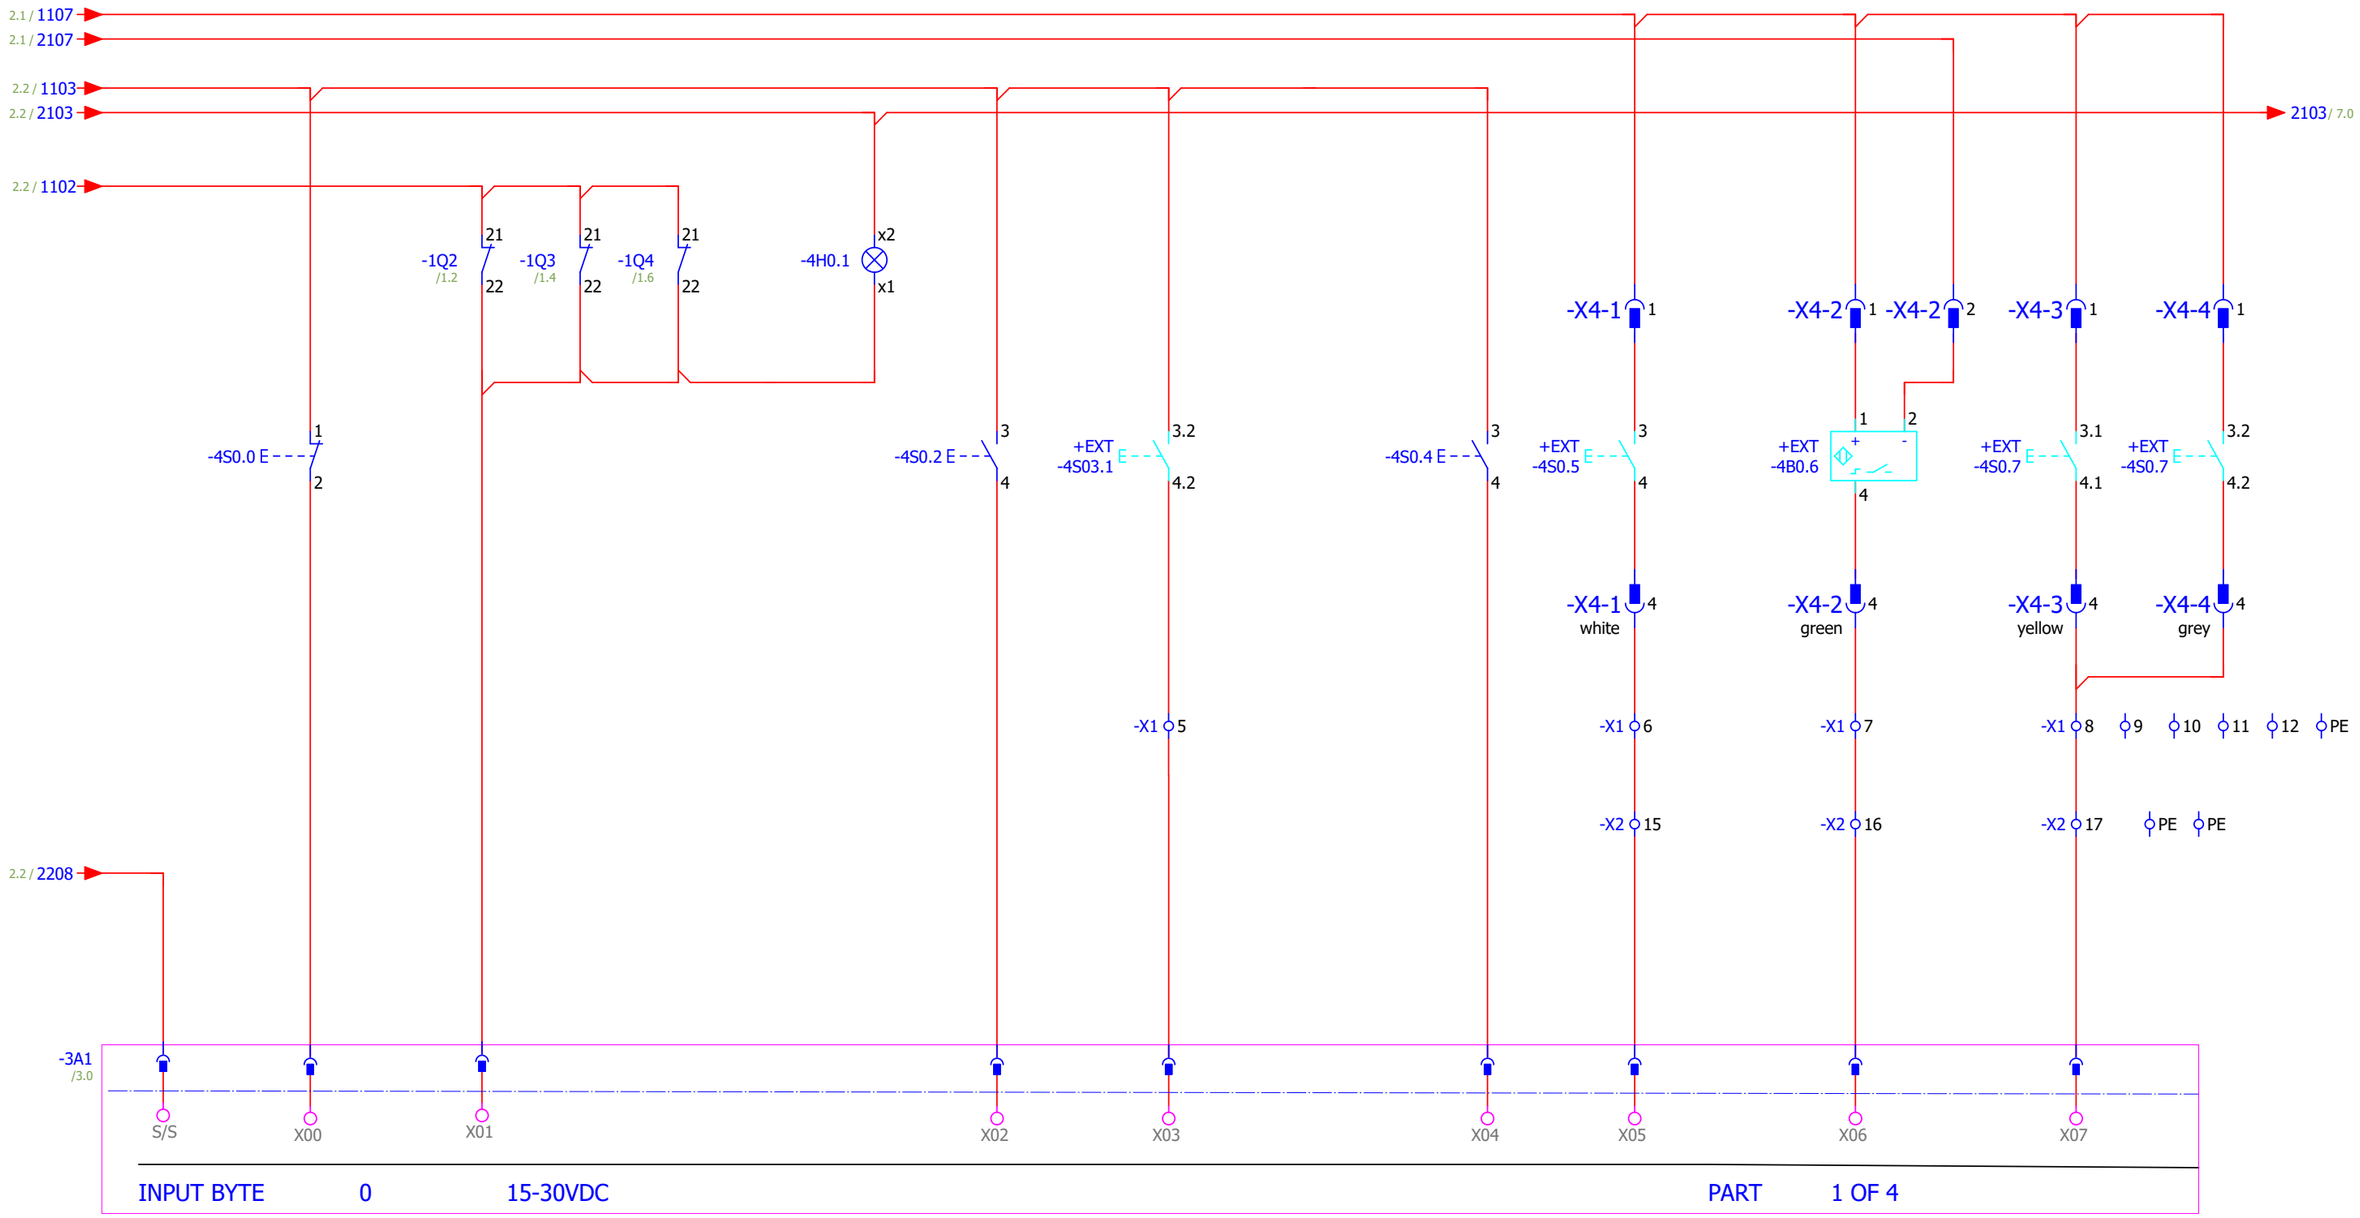

Version	V01_00		Modification	03.01.2025	
Date			Edited by	AW	
Creator			Checked	AW	

Wegmann
rolling machine


WEGMANN automotive engineering


FX5U-64M
X00-X07


V01_00

+ S1

Page. 4
from

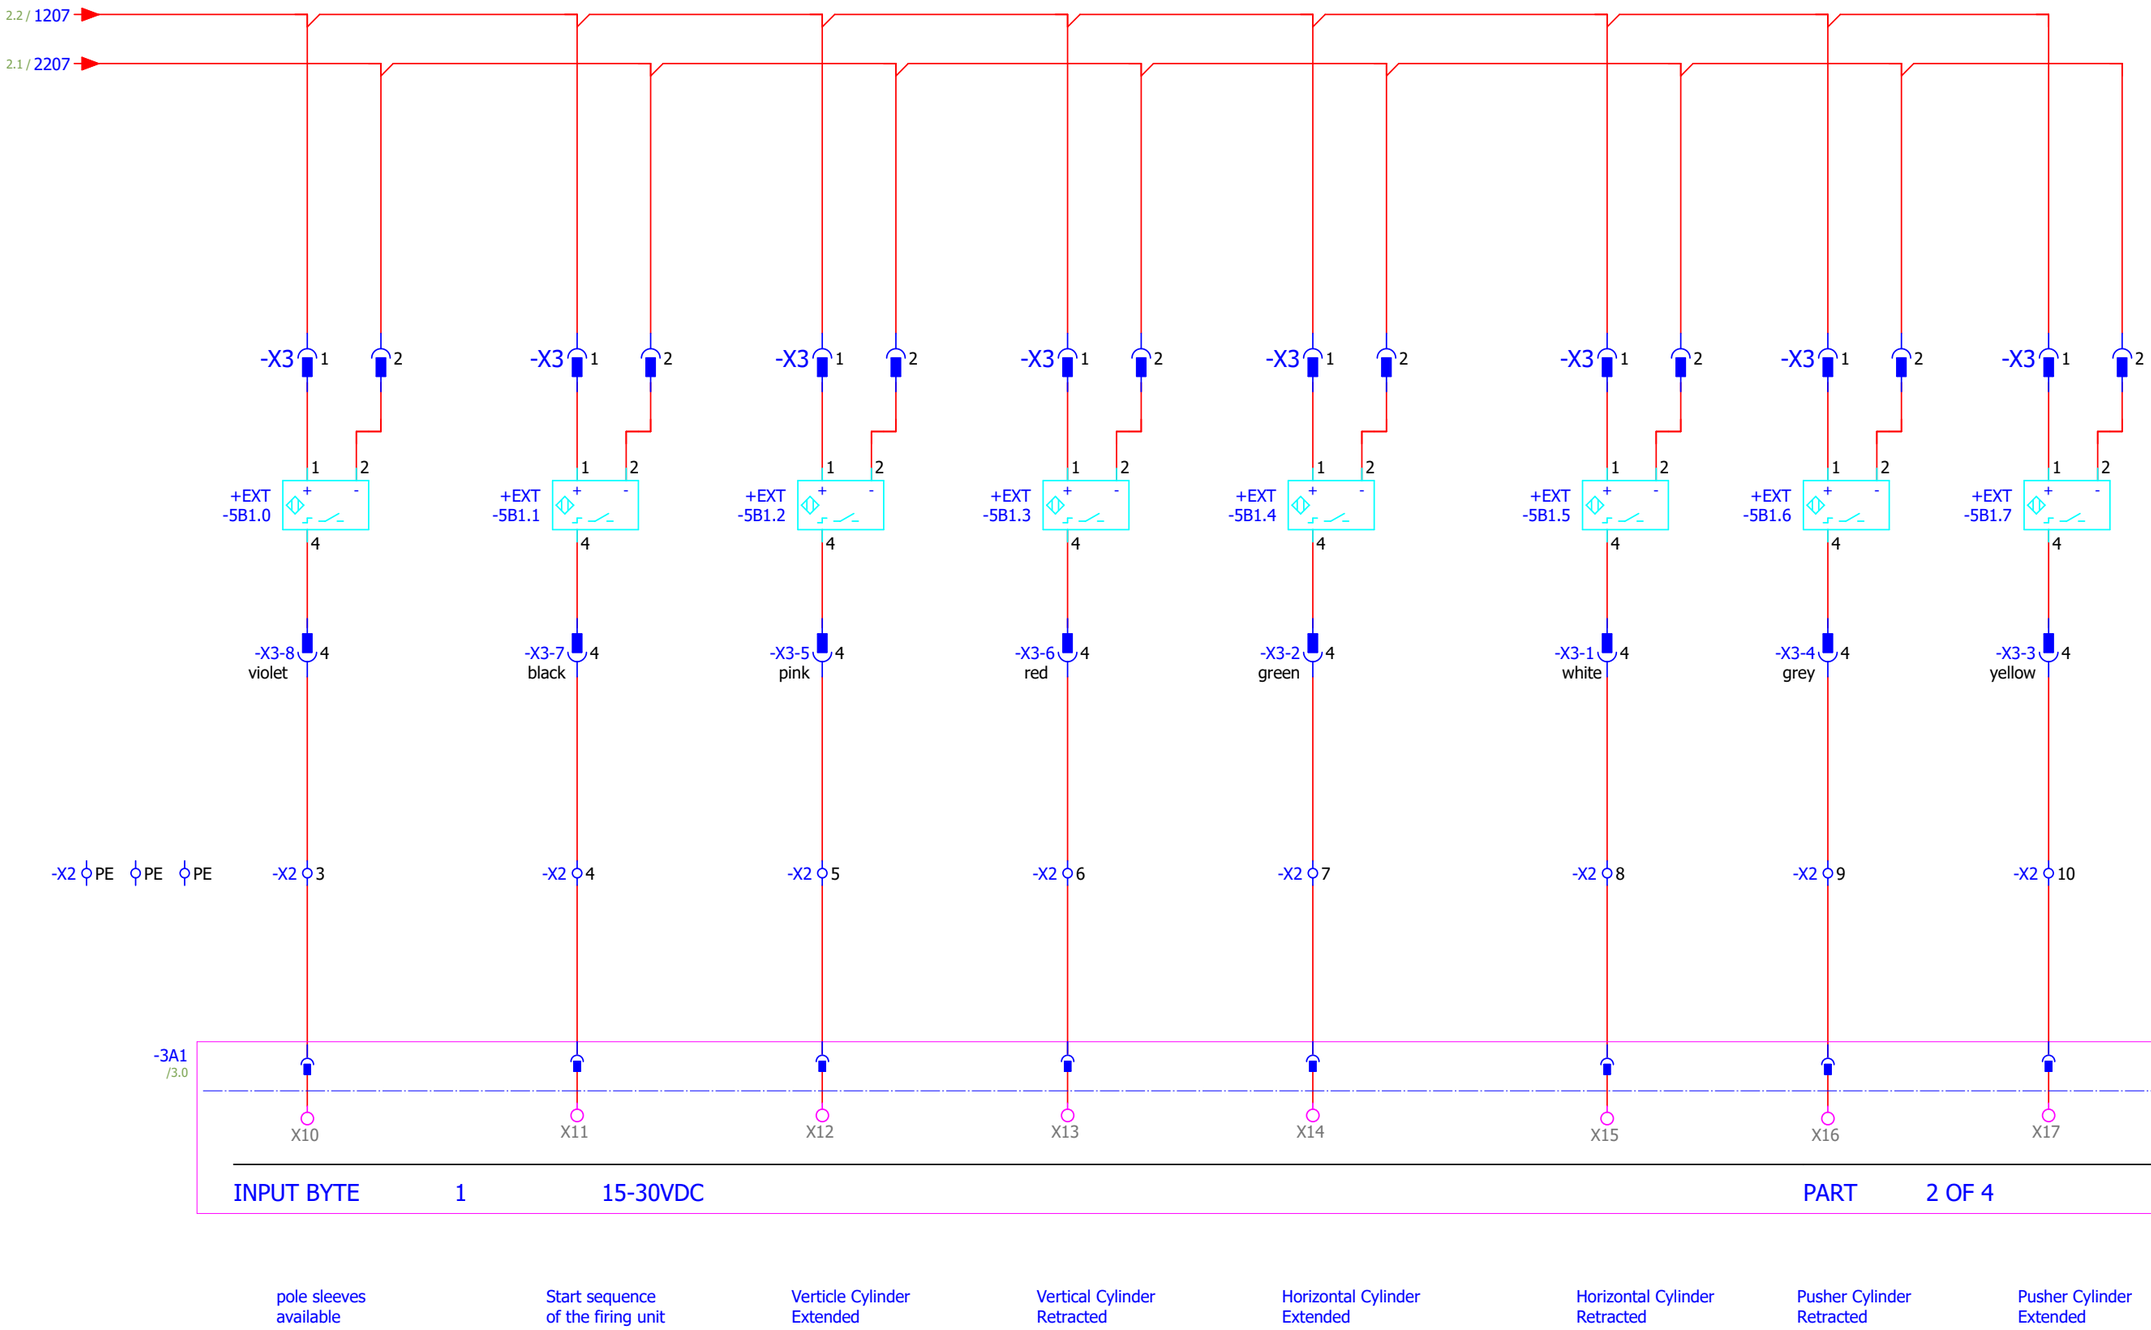
2.2 / 1207
2.1 / 2207
-X3 1 2
+EXT -5B1.0
+EXT -5B1.1
+EXT -5B1.2
+EXT -5B1.3
+EXT -5B1.4
+EXT -5B1.5
+EXT -5B1.6
+EXT -5B1.7
-X3-8 4 violet
-X3-7 4 black
-X3-5 4 pink
-X3-6 4 red
-X3-2 4 green
-X3-1 4 white
-X3-4 4 grey
-X3-3 4 yellow
-X2 PE PE PE
-X2 3
-X2 4
-X2 5
-X2 6
-X2 7
-X2 8
-X2 9
-X2 10
-3A1 /3.0
X10
X11
X12
X13
X14
X15
X16
X17
INPUT BYTE 1 15-30VDC PART 2 OF 4
pole sleeves available
Start sequence of the firing unit
Verticle Cylinder Extended
Vertical Cylinder Retracted
Horizontal Cylinder Extended
Horizontal Cylinder Retracted
Pusher Cylinder Retracted
Pusher Cylinder Extended

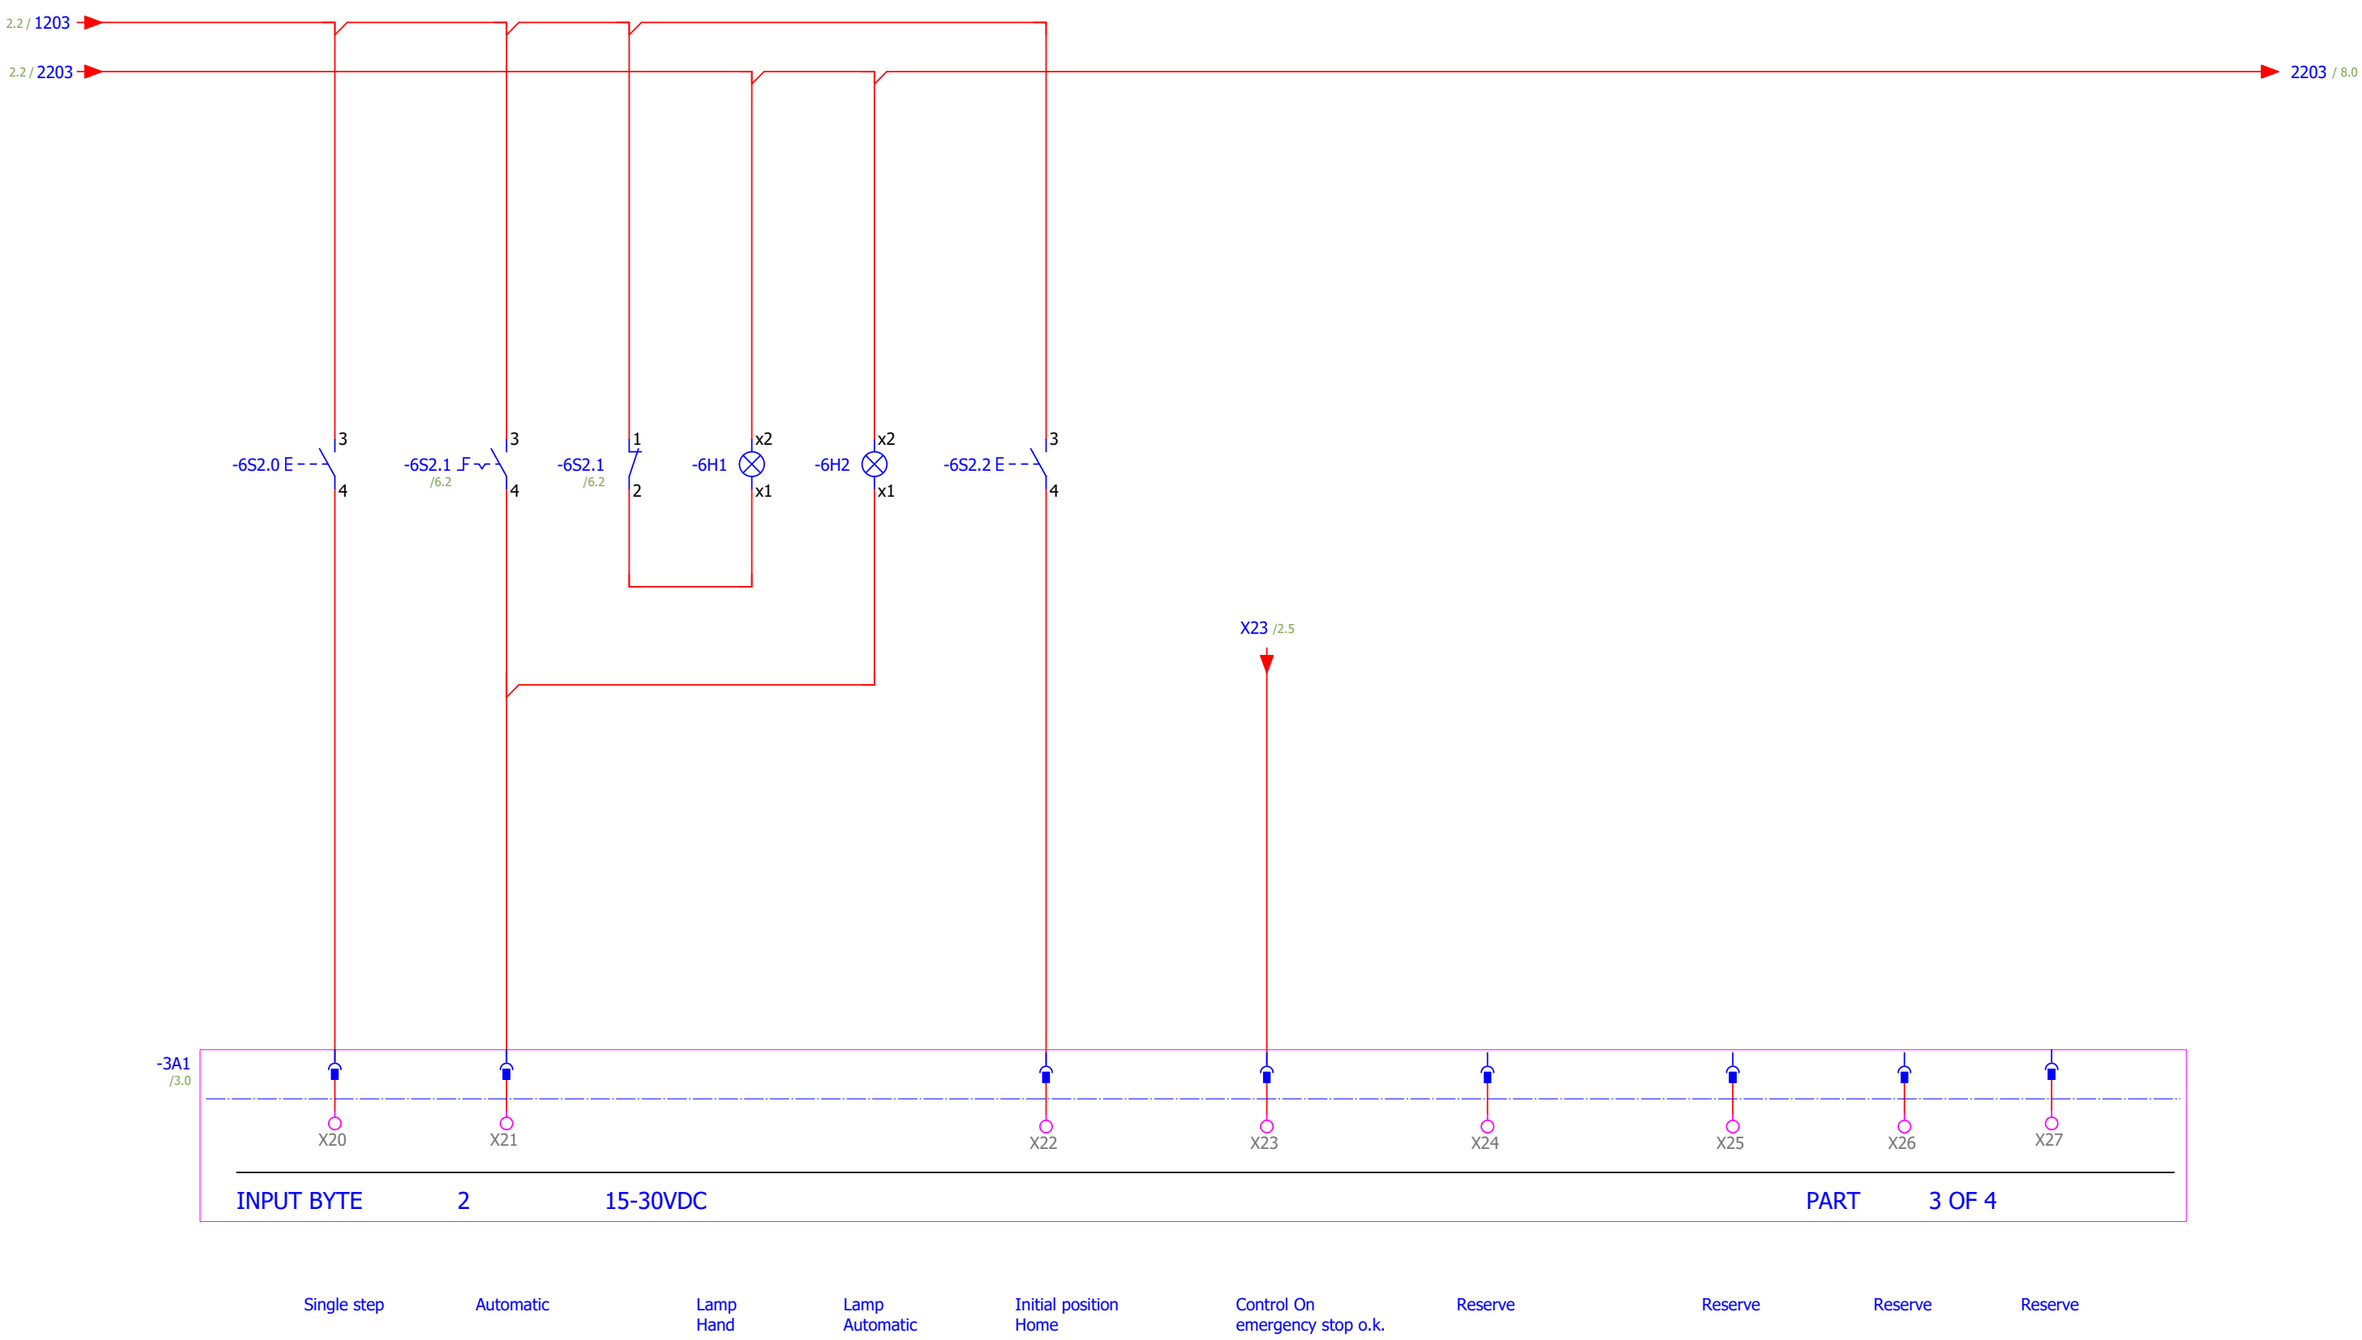
2.2 / 1203
2.2 / 2203
2203 / 8.0
-6S2.0 E
-6S2.1 F
/6.2
-6S2.1
/6.2
-6H1
-6H2
-6S2.2 E
3
4
1
2
x2
x1
X23 /2.5
-3A1
/3.0
X20
X21
X22
X23
X24
X25
X26
X27
INPUT BYTE 2 15-30VDC
PART 3 OF 4
Single step
Automatic
Lamp Hand
Lamp Automatic
Initial position Home
Control On emergency stop o.k.
Reserve
Reserve
Reserve
Reserve

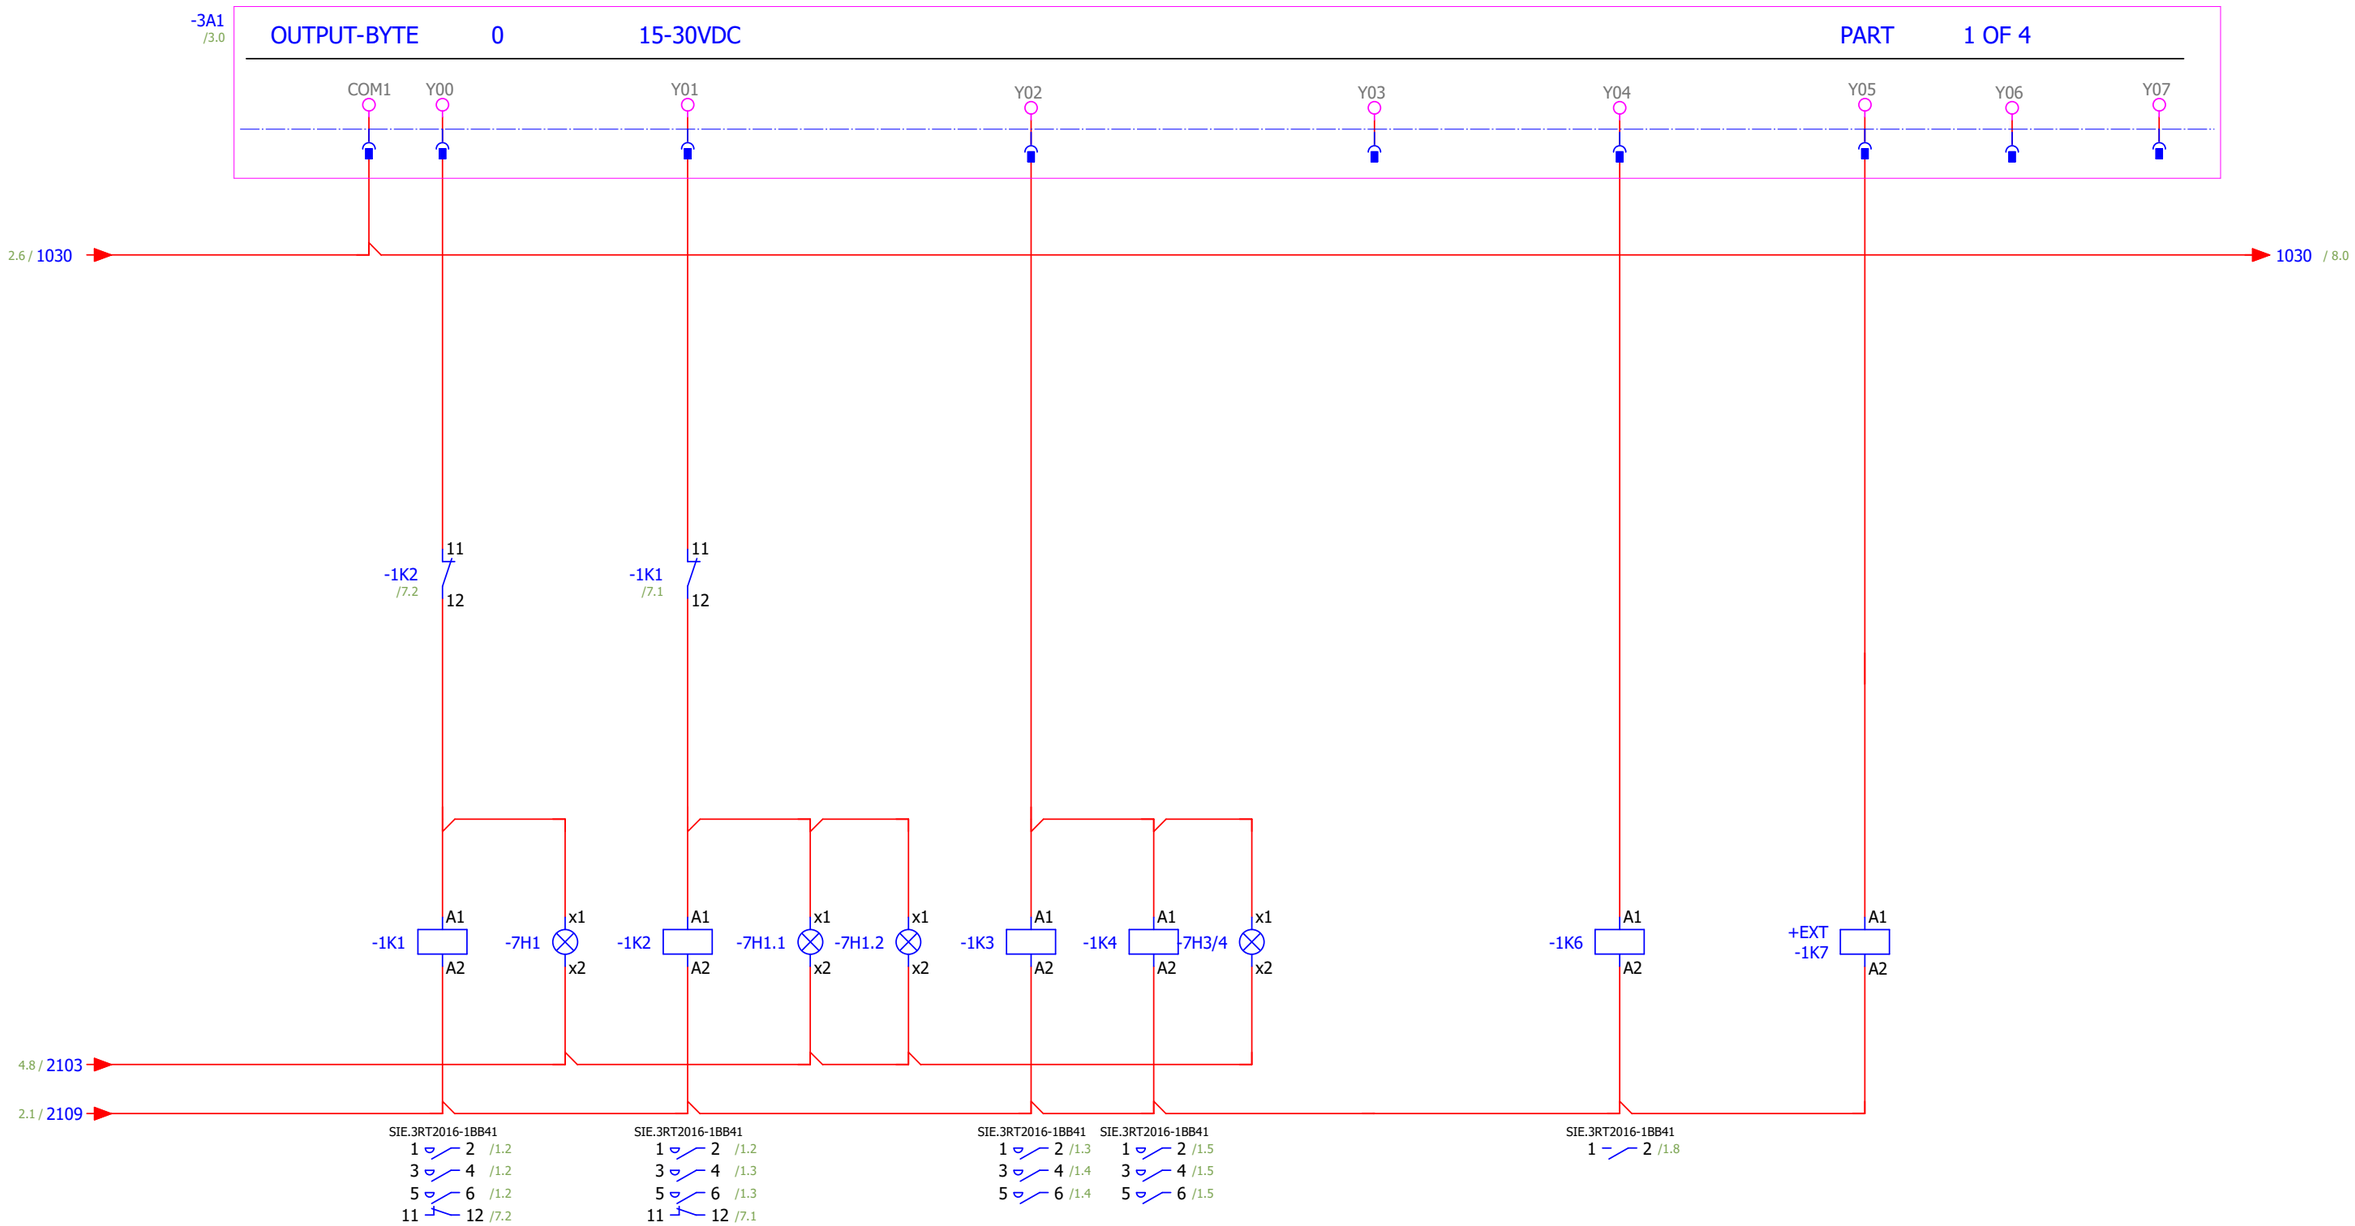

Pole wheel clockwise rotation In	Lamp Pole wheel clockwise rotation On	Pole wheel anti-clockwise rotation In	Lamp Pole wheel anti-clockwise rotation On	Lamp Pole wheel anti-clockwise rotation On	Roller 1 On	Roller 2 On	Lamp Rolling On	Reserve	Feed bowl On	Signal to Tote Conveyor to push New box in place	Reserve	Reserve

Version	V01_00	Modification	03.01.2025	Wegmann rolling machine	FX5U-64M Y00-Y07
Date		Edited by	AW	WEGMANN automotive engineering	
Creator		Checked	AW		V01_00

+ S1

Page. 7

from

-3A1
/3.0

OUTPUT-BYTE 1 15-30VDC PART 2 OF 4

COM2 Y10 Y11 Y12 Y13 Y14 Y15 Y16 Y17

7.8 / 1030

-X2 11 pink
-X2 12 white
-X2 13 yellow

+EXT -8Y1 x1 x2
+EXT -8Y2 x1 x2
+EXT -8Y3 x1 x2
-8H1 x1 x2

6.8 / 2203
4.0 / 2209

Horizontal Cylinder Retract	Vertical Cylinder Retract	Pusher Cylinder Extend	Machine in Home Position Lamp	Reserve	Reserve	Reserve	Reserve

Version	V01_00		Modification	03.01.2025	Wegmann rolling machine	WEGMANN automotive engineering	FX5U-64M Y10-Y17
Date			Edited by	AW			
Creator			Checked	AW			V01_00

+ S1
Page. 8
from