Computer Networks I

Network Layer Details - 3

Amitangshu Pal
Computer Science and Engineering
IIT Kanpur

Making routing scalable

our routing study thus far - idealized

- all routers identical
- network "flat"

… not true in practice

scale: billions of destinations:

- can't store all destinations in routing tables!
- routing table exchange would swamp links!

administrative autonomy:

- Internet: a network of networks
- each network admin may want to control routing in its own network

Internet approach to scalable routing

aggregate routers into regions known as "autonomous systems" (AS) (a.k.a. "domains")

intra-AS (aka "intra-domain"): routing among within same AS ("network")

- all routers in AS must run same intra-domain protocol
- routers in different AS can run different intra-domain routing protocols
- gateway router: at "edge" of its own AS, has link(s) to router(s) in other AS'es

inter-AS (aka "inter-domain"): routing among AS'es

- gateways perform inter-domain routing (as well as intra-domain routing)

Interconnected ASes

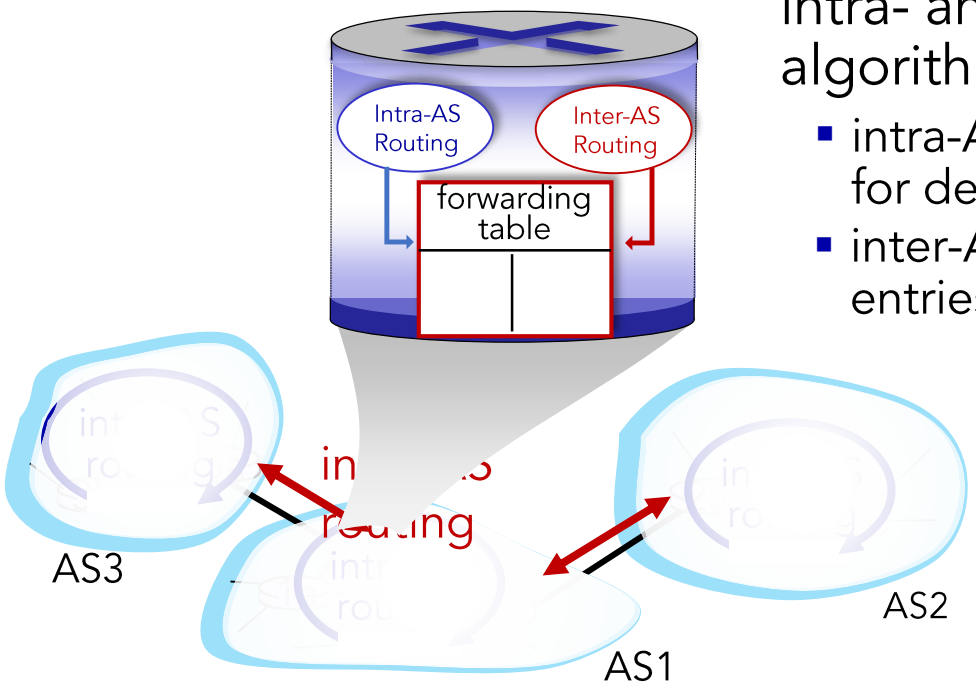

forwarding table configured by intra- and inter-AS routing algorithms

- intra-AS routing determine entries for destinations within AS
- inter-AS & intra-AS determine entries for external destinations

Inter-AS routing: a role in intradomain forwarding

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router in AS1, but which one?

AS1 inter-domain routing must:

1. learn which destinations reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

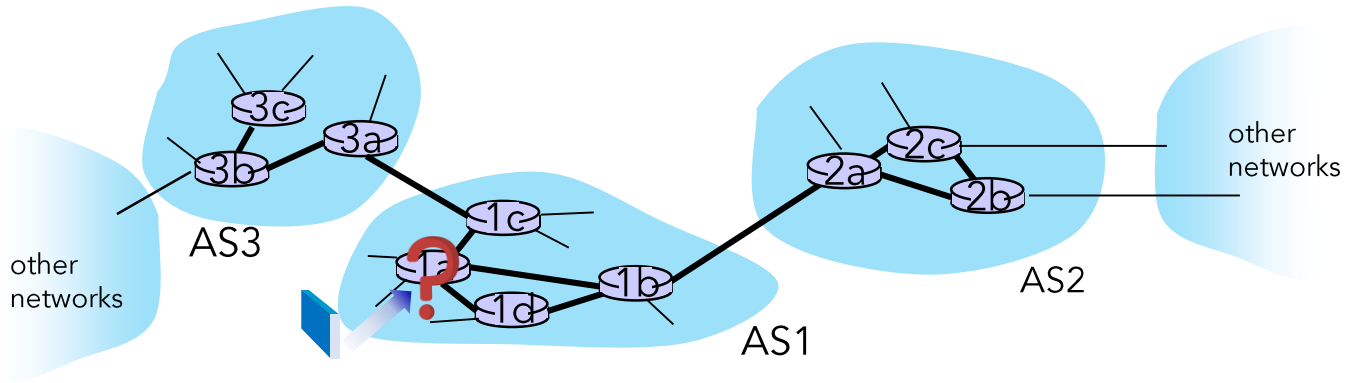

Intra-AS routing: routing within an AS

most common intra-AS routing protocols:

- RIP: Routing Information Protocol [RFC 1723]
  - classic DV: DVs exchanged every 30 secs
  - no longer widely used
- EIGRP: Enhanced Interior Gateway Routing Protocol
  - DV based
  - formerly Cisco-proprietary for decades (became open in 2013 [RFC 7868])
- OSPF: Open Shortest Path First [RFC 2328]
  - link-state routing
  - IS-IS protocol (ISO standard, not RFC standard) essentially same as OSPF

Routing Information Protocol

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement)
  - each advertisement: list of up to 25 destination *subnets (in IP addressing sense)*

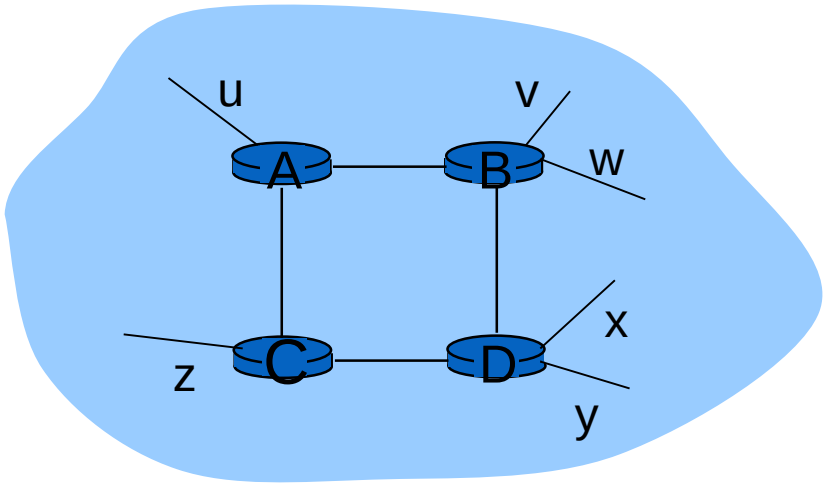

from router A to destination *subnets:*

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: example

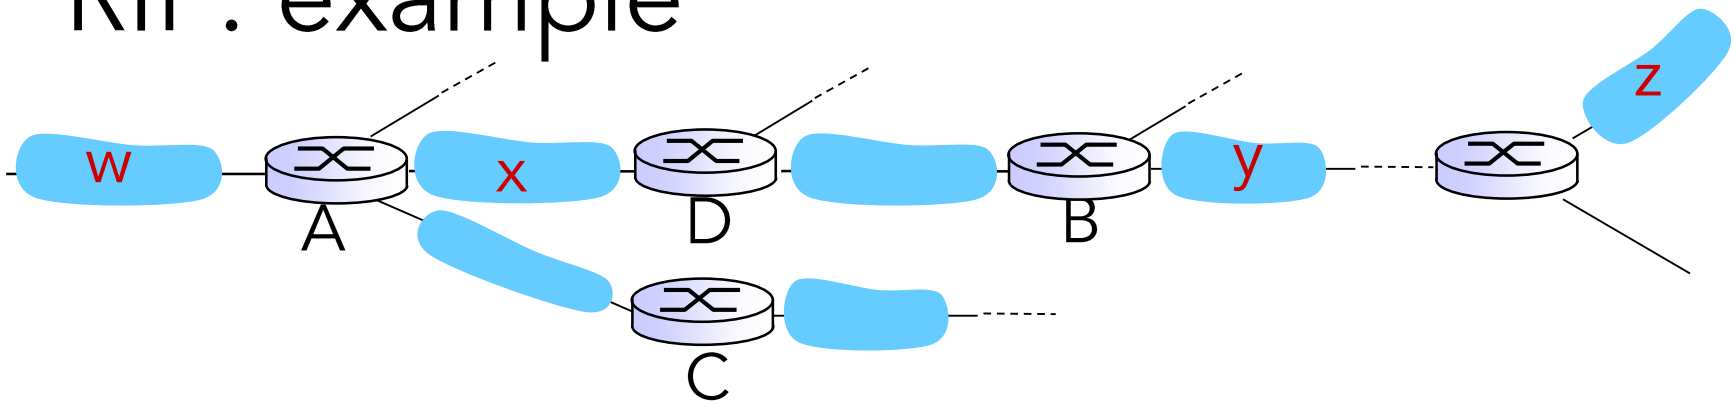

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

RIP: example

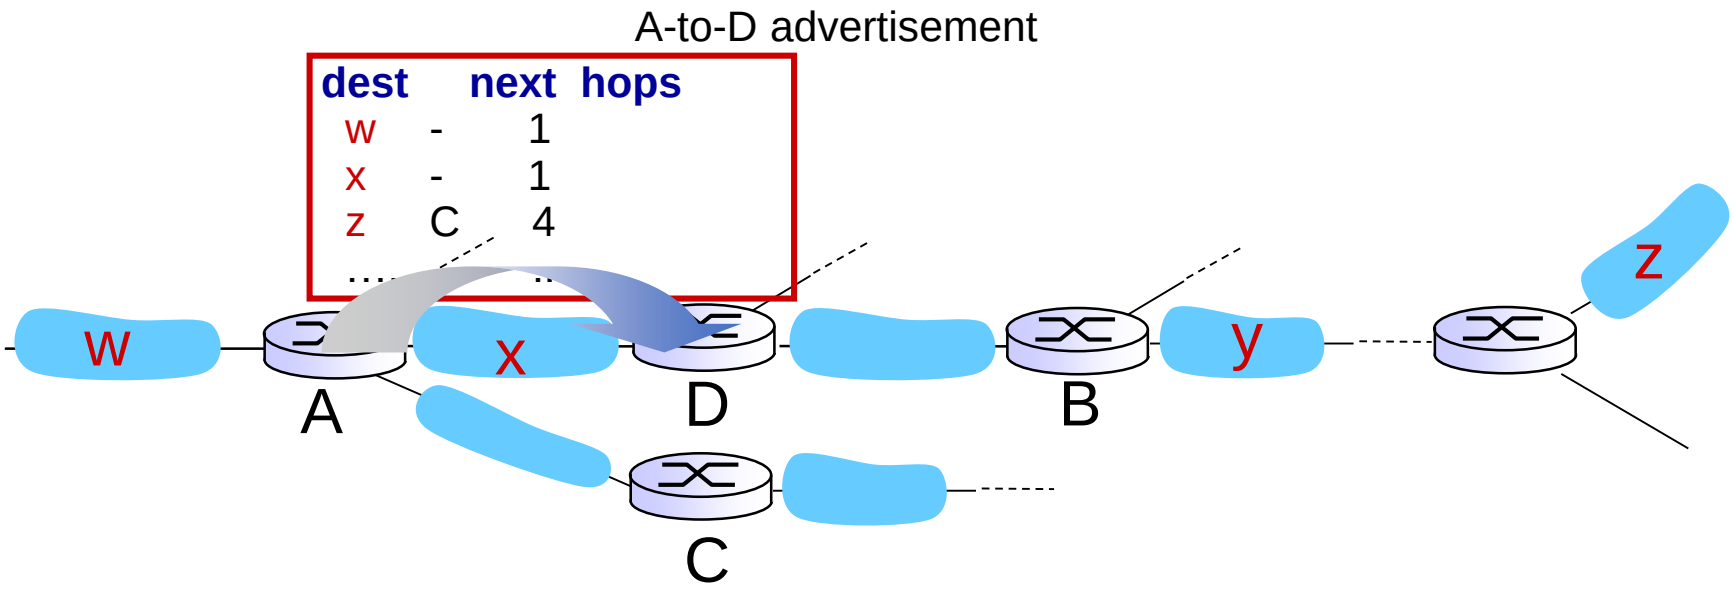

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	~~B~~ A	~~7~~ 5
x	--	1
….	….	….

RIP: link failure, recovery

If no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- poison reverse used to prevent ping-pong loops (infinite distance = 16 hops)

OSPF (Open Shortest Path First) routing

OSPF (Open Shortest Path First) routing

- "open": publicly available
- classic link-state
  - each router floods OSPF link-state advertisements (directly over IP rather than using TCP/UDP) to all other routers in entire AS
  - multiple link costs metrics possible: bandwidth, delay
  - each router has full topology, uses Dijkstra's algorithm to compute forwarding table
- security: all OSPF messages authenticated (to prevent malicious intrusion)

Hierarchical OSPF

- two-level hierarchy: local area, backbone.
  - link-state advertisements flooded only in area, or backbone
  - each node has detailed area topology; only knows direction to reach other destinations

area border routers: "summarize" distances to destinations in own area, advertise in backbone

local routers:
- flood LS in area only
- compute routing within area
- forward packets to outside via area border router

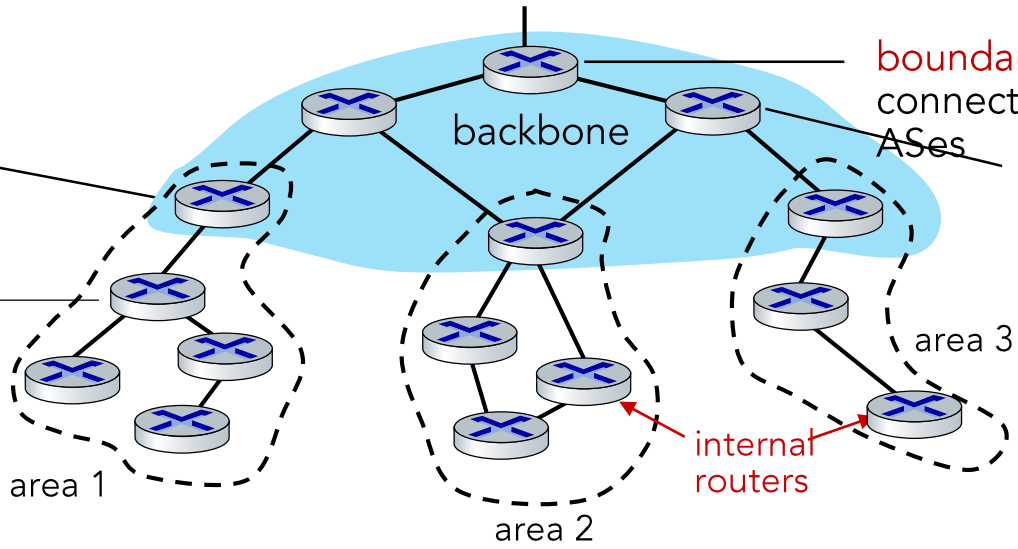

THANK YOU

QUESTIONS???