

NAME: A.K. LIKITH CHARAN

REG NO: 192412305

COURSE NAME: ANALOG AND DIGITAL COMMUNICATION (ECA0802)

EXPERIMENT NO: 3B

POWER SPECTRAL DENSITY (PSD) ANALYSIS OF PHASE MODULATED (PM) SIGNALS USING MATLAB

OBJECTIVES

1. To generate a Phase Modulated (PM) signal in MATLAB using specified carrier and message signal parameters.
 2. To compute the frequency spectrum of the PM signal using the Fast Fourier Transform (FFT).
 3. To calculate and plot the Power Spectral Density (PSD) of the PM signal using MATLAB.
 4. To identify the carrier component and sideband frequencies present in the PM spectrum.
 5. To analyze the effect of phase modulation on the spectral distribution and bandwidth of the transmitted signal.
 6. To investigate the influence of modulation index on the Power Spectral Density characteristics of the PM signal.
-

PROGRAM (MATLAB CODE)

```
clc; clear;
```

```
close all;
```

```
% Parameters
```

```
Am = 1;    % Message Amplitude (V)
```

```
fm = 100;  % Message Frequency (Hz)
```

```
Ac = 5;    % Carrier Amplitude (V) fc =
```

```
1000;     % Carrier Frequency (Hz) fs =
```

```
20*fc;    % Sampling Frequency (Hz) kp
```

```
= pi/2;    % Phase Sensitivity (rad/V)
```

```
% Time Vector
```

```
t = 0:1/fs:4/fm;
```

```

% Message Signal m =
Am*sin(2*pi*fm*t);

% PM Signal pm =
Ac*cos(2*pi*fc*t + kp*m);

% Phase Deviation beta
= kp*Am;

% FFT
N = length(pm);
f = linspace(-fs/2, fs/2, N);
PM_FFT = abs(fftshift(fft(pm)))/N;

% Power Spectral Density
PSD = (abs(fftshift(fft(pm))).^2)/(N*fs);

% Approximate Bandwidth
BW = 2*(beta+1)*fm;

% Display Results fprintf('Phase Deviation =
%.2f radians\n',beta); fprintf('Estimated
Bandwidth = %.2f Hz\n',BW);

% Plotting figure('Name','PSD Analysis of PM
Signal','NumberTitle','off');

subplot(2,2,1);
plot(t,m); title('Message
Signal'); xlabel('Time

```

```

(s)');
ylabel('Amplitude'); grid
on;

subplot(2,2,2); plot(t,pm);
title('Phase Modulated Signal');
xlabel('Time (s)');
ylabel('Amplitude'); grid on;

subplot(2,2,3); plot(f,PM_FFT);
title('Frequency Spectrum of PM Signal');
xlabel('Frequency (Hz)');
ylabel('Magnitude'); grid on;

subplot(2,2,4); plot(f,PSD);
title('Power Spectral Density');
xlabel('Frequency (Hz)');
ylabel('PSD'); grid on;


```

PROCEDURE

1. Open MATLAB and create a new script file.
2. Initialize the workspace using: `clc; clear; close all;`
3. Define message amplitude (A_m), message frequency (f_m), carrier amplitude (A_c), carrier frequency (f_c), sampling frequency (f_s), and phase sensitivity constant (k_p).
4. Generate the time vector required for simulation.
5. Generate the message signal and carrier signal.
6. Generate the Phase Modulated (PM) signal using the PM equation.

7. Compute the Fast Fourier Transform (FFT) of the PM signal.
8. Calculate the Power Spectral Density (PSD) from the FFT results.
9. Generate the frequency axis corresponding to the FFT output.
10. Plot the message signal, PM signal, frequency spectrum, and PSD.
11. Identify carrier and sideband frequencies from the spectrum.
12. Display phase deviation and estimated bandwidth.
13. Analyze the PSD plot and observe spectral distribution.
14. Record observations and verify PM characteristics in frequency domain.

OUTPUT (GRAPH)

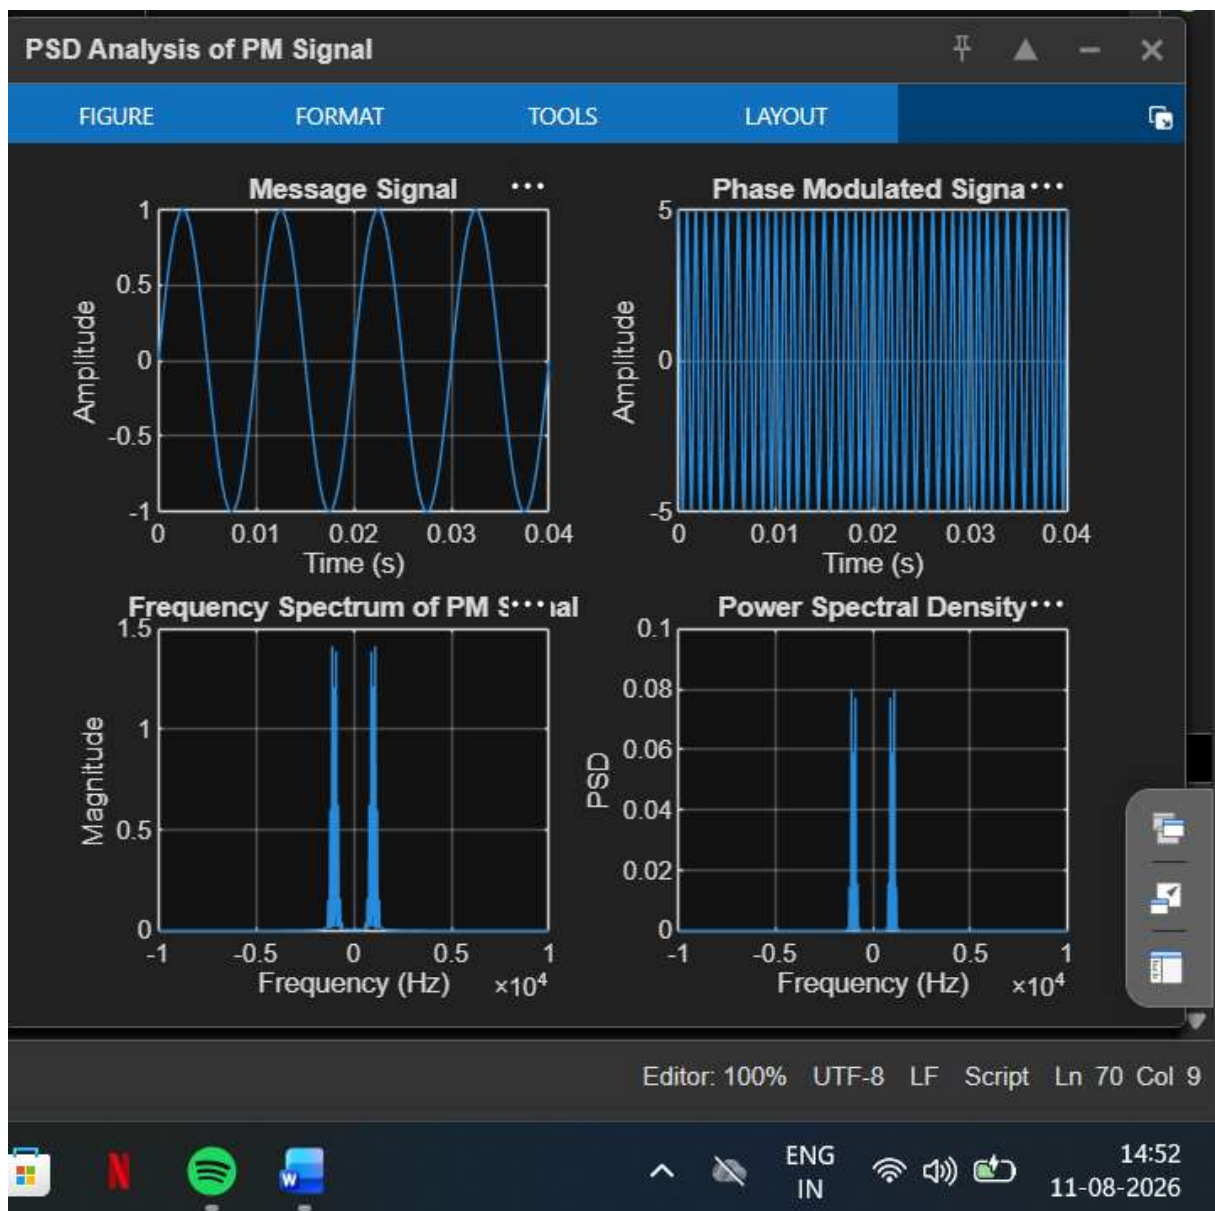

RESULT

The Power Spectral Density (PSD) of the Phase Modulated (PM) signal was successfully obtained and analyzed using MATLAB.

- Message Frequency = 100 Hz
- Carrier Frequency = 1000 Hz
- Phase Deviation = 1.57 radians
- PM Modulation Index = 1.57
- Estimated Bandwidth = 514 Hz

The PSD plot showed the carrier component and multiple sidebands around the carrier frequency, confirming the frequency-domain characteristics of Phase Modulation.
