

Minimal NFC and LED Circuit

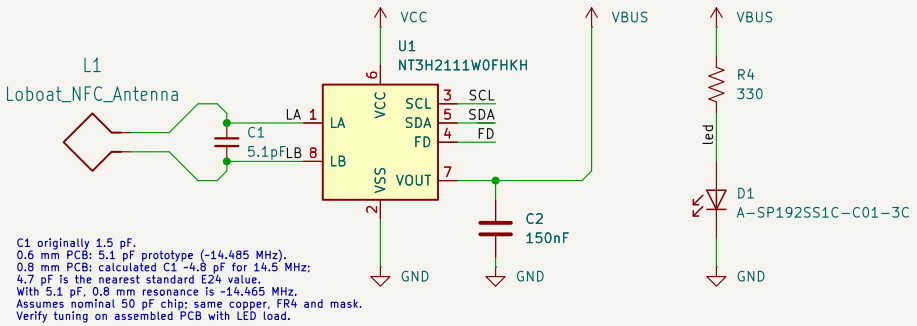


C1 originally 1.5 pF.
0.6 mm PCB: 5.1 pF prototype (~14.485 MHz).
0.8 mm PCB: calculated C1 ~4.8 pF for 14.5 MHz;
4.7 pF is the nearest standard E24 value.
With 5.1 pF, 0.8 mm resonance is ~14.465 MHz.
Assumes nominal 50 pF chip; same copper, FR4 and mask.
Verify tuning on assembled PCB with LED load.

Disabled I2C TestPoints



Tag-Connect I2C for Hika FTDI

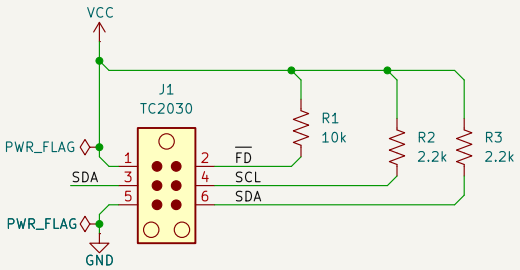


Wired for the following devices:
* Tag-Connect TC2030 3.3V FT232H No-legs
* Tag-Connect TC2030 3.3V FT232H Legs

Tag-Connect pin	FT232H/Hika signal and function	Target
1	+3V3	VCC
2	AD3 / CTS / TMS – UART clear-to-send input	$\overline{FD}$
3	AD1 / RXD / TDI – UART receive input	SDA OUT
4	AD0 / TXD / TCLK – UART transmit output	SCL
5	GND	GND
6	AD2 / RTS / TDO – UART request-to-send output	SDA IN

INFO1

CONTACT INFO
Your Name
Your Company
Your Role
you@example.com
+1 202-555-0123
example.com

LOGO1



ART1

SIGN1
CJH '26
Author: Craig Hesling

Sheet: /
File: business-card.kicad_sch

Title: Business Card

Size: A	Date: 2026-10-05	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: 1/1