


Keychain Kreatures - flat, removable board stack

C.6 / P.3 PROTOTYPE REVIEW - PHYSICAL / BENCH QUALIFICATION PENDING


Shared outline: 96 x 105 mm; 4 mm corner radius; 1.6 mm PCB.

Four 2.2 mm clearance holes: (4,4), (92,4), (4,101), (92,101) mm.

Coordinates below: top-left origin, X right, Y down. Both boards use this pattern.

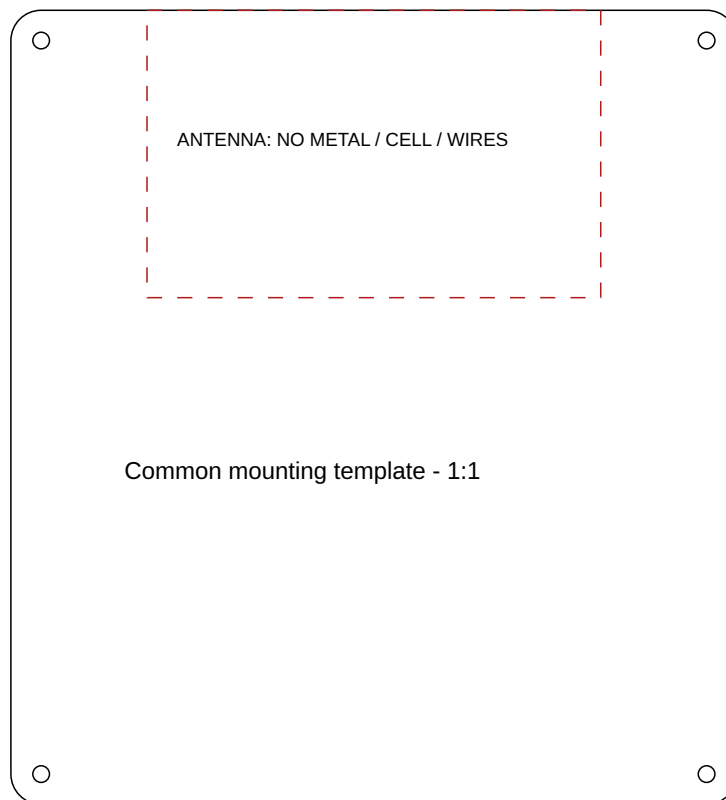

100 mm calibration line:



PRINT AT 100% / ACTUAL SIZE. Disable fit-to-page. Measure the line first.

Stack orientation: main display/buttons outward at the front of the case.

Power component side faces the rear cover; its test-pad face points toward main.

Power-board front view is X-mirrored relative to main-front physical coordinates.

Start a fit mock-up with FOUR 20 mm M2 insulating standoffs between PCB faces.

This spacing is provisional: check plugged JST bodies, cable bends and solder tails.

Clip solder tails to ≤ 2.5 mm, inspect every joint, and keep loose wires restrained.

Unscrew and unplug the rear power board to expose the student main-board parts.

Do not trap a battery between solder tails and components. Cell position is not frozen.

Keep a protective insulating barrier; never use battery foil as an electrical insulator.