


REVISIONS			
REV	DESCRIPTION	BY	DATE
V	#303: FB-101 base U, FB-102 pan G, FB-104 R1 clip E	DG	18/10/26
W	Buildability review: strap hook 40 deg lead-in, strap seat pocket (R181) - FB-101 base V; first assembly drawing	DG	18/10/26
X	FB-117 strap B (its PEM nuts in the strap model)	DG	18/10/26
Y	FB-117 strap C, FB-101 base W, FB-102 pan H (N36 = A: lug PEM clear of the bend)	DG	18/10/26
Z	N37: FB-117 strap D (FHS stud + DIN 934 top nut in a new printed holder, 14), FB-101 base X; lug bolts out, Keps nuts on the lug studs	DG	19/10/26
AA	Fuse box rev 8 (Dan A15 b): rev 8 parts and parts list - box wiring (R1 a), no heater relay or ACPS fuse (A16 a), FAN 30 A / EPS 50 A; K-EPS and the DRL cut relay (GEP FRH-A12, A30 a) sit beside the box	DG	13/11/26

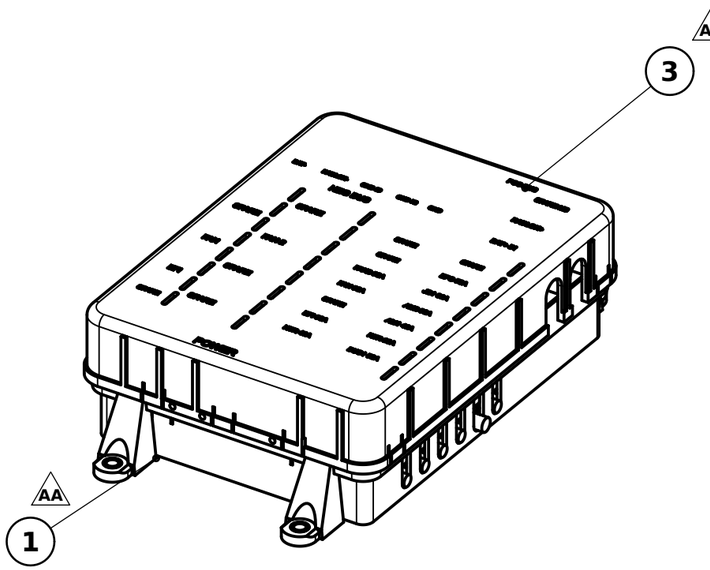


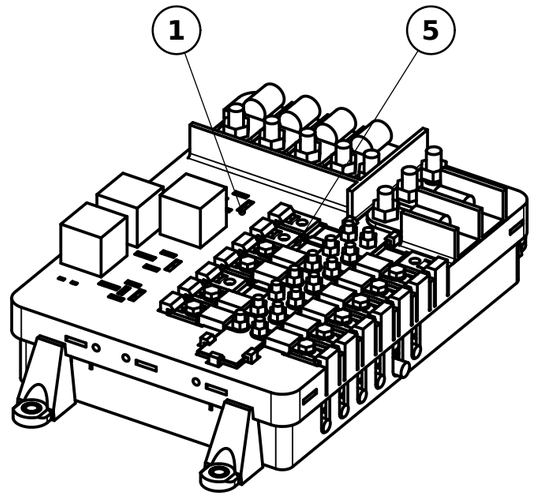

TRIMETRIC VIEW



TRIMETRIC - COVER REMOVED

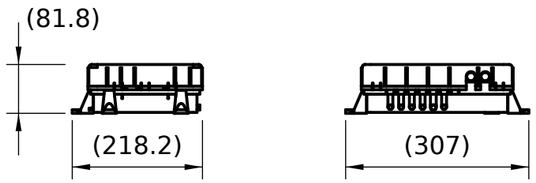

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL / SPEC
1	1	ST185-FB-101	POWER BASE (WITH THE BUS ZONE)	PA12, 3D PRINTED
2	1	ST185-FB-102	POWER PAN (BELLY PAN)	PA12, 3D PRINTED
3	1	ST185-FB-103	POWER COVER	PA12, 3D PRINTED
4	2	ST185-FB-113/-114	POS BUS BAR L226 + NEG BAR L105	C110 Cu, TINNED
5	1	ST185-FB-117	OUTPUT C-STRAP 15 x 3 (14 FROM 1 BAR)	C110 Cu, TINNED
6	14	PEM FHS-M5-12	FLUSH-HEAD SELF-CLINCHING STUD M5 X 12	400-SERIES STAINLESS
7	14	RS 527-268	HEX NUT M5 DIN 934, TOP NUT IN ITS HOLDER	A2 STAINLESS
8	14	ST185-FB-118	C-STRAP TOP-NUT HOLDER, PA12 (1 PER STRAP)	PA12, 3D PRINTED
9	5	AMI-30	AMI BOLT-DOWN FUSE 30 A	PURCHASED
10	2	AMI-40	AMI BOLT-DOWN FUSE 40 A	PURCHASED
11	2	AMI-50	AMI BOLT-DOWN FUSE 50 A	PURCHASED
12	1	AMI-60	AMI BOLT-DOWN FUSE 60 A	PURCHASED
13	2	1-1414147-0	MAXI ISO F7 RELAY 680 OHM (K-EFI, K-FAN)	PURCHASED
14	1	1-1393304-0	RELAY K-FAN2 (MAXI ISO F7, BRACKET, 560 (SEE NOTE 2) (NOT SHOWN)	PURCHASED
15	6	280756-4	MAXI RELAY LOAD RECEPTACLE 9.5 X 1.2	PURCHASED
16	6	42281-1	RELAY RECEPTACLE 6.3 X 0.8, 18-14 AWG	PURCHASED
17	1	RNF-100-1/8-0-STK	INSULATION BUILD-UP SLEEVE 1/8, 7 ENDS X 15 MM (NOT SHOWN)	PURCHASED
18	1	RNF-100-3/32-0-STK	INSULATION BUILD-UP SLEEVE 3/32 (NOT SHOWN)	PURCHASED
19	4	94459A140	M3 HEAT-SET INSERT (OPTIONAL COVER BACKUP) (NOT SHOWN)	BRASS
20	4	SSCF-M3-10-A4	M3 x 10 CAP SCREW (OPTIONAL COVER BACKUP) (NOT SHOWN)	A4 STAINLESS
21	8	Klauke 2R5	TUBULAR LUG 10 MM2, M5 HOLE (8-10 AWG)	Cu, TINNED
22	1	Klauke 3R5MS	TUBULAR LUG 16 MM2, M5 HOLE (6 AWG) (NOT SHOWN)	Cu, TINNED
23	1	36161	RING LUG 12-10 AWG, M5 / #10 HOLE (NOT SHOWN)	Cu, TINNED
24	6	Klauke 6R8	TUBULAR LUG 50 MM2, M8 HOLE	Cu, TINNED
25	14	RS 287-3921	HEX BOLT M5 x 10, EAR (DOWN INTO THE TOP NUT)	A2 STAINLESS
26	14	RS 263-2205	HEX BOLT M5 x 16 / M8 x 25, BAR STUDS	A2 STAINLESS
27	28	RS 264-6432	KEPS NUT M5 (BAR STUDS + LUG STUDS) / HEX NUT M8	A2 STAINLESS
28	8	RS 190-276	HEX BOLT M8 X 25 (BUS STUDS: 3 POS + 5 N (SEE NOTE 2) (NOT SHOWN)	A2 STAINLESS
29	8	RS 530-769	HEX NUT M8 (BUS STUDS) (SEE NOTE 2) (NOT SHOWN)	A2 STAINLESS
30	8	RS 797-6068	PLAIN WASHER M8 (BUS STUDS) (NOT SHOWN)	A2 STAINLESS
31	4	EFC 10S00056	COMPRESSION LIMITER, FEET (4)	STEEL, ZINC
32	1	J1128-TXL-8-RED	BOX WIRE TXL 8 AWG RED (NOT SHOWN)	PURCHASED
33	2	J1128-TXL-10-RED	BOX WIRE TXL 10 AWG RED (NOT SHOWN)	PURCHASED
34	1	J1128-TXL-12-RED	BOX WIRE TXL 12 AWG RED (NOT SHOWN)	PURCHASED
35	1	J1128-TXL-18-RED	BOX WIRE TXL 18 AWG RED (NOT SHOWN)	PURCHASED
36	1	J1128-TXL-20-BLACK	BOX WIRE TXL 20 AWG BLACK (NOT SHOWN)	PURCHASED
37	1	320572	RING TERMINAL, K-ON COIL GROUND ON THE NEG BAR GND STUD (NOT SHOWN)	PURCHASED

FRONT / TOP / RIGHT VIEWS SCALE 1:10

NOTES:

1. SIZES IN BRACKETS ARE FOR REFERENCE. SHEETS 2 - 5: WHAT EACH FUSE AND RELAY FEEDS AND THE HARNESS WIRE AT EACH END.
2. PARTS THAT SHARE ONE MODEL (RELAYS, LUGS, NUTS, BOLTS) ARE BALLOONED ON THE FIRST ITEM OF THEIR GROUP.
3. M5 BOLTS AND NUTS: 4 N·m MAX (AMI FUSE SHEET).
4. C-STRAPS: BUILD THEM AS ST185-FB-117 SHEET 2, THEN PUSH EACH STRAIGHT DOWN INTO ITS WELL UNTIL THE HOOKS CLICK OVER THE LIPS.
5. TERMINALS GO UP FROM UNDER THE DECK UNTIL THE LANCE CLICKS; TUG THE WIRE TO CHECK (TE 114-2025 3.6, 114-20021 3.7).
6. TIE THE HARNESS NO CLOSER THAN 38 mm UNDER THE DECK; NO SHARP BENDS AT THE DECK (TE 114-20021 3.7 C).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	AA	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:10	mm	B (11x17)	1 OF 9	2026-11-13	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

WHAT EACH FUSE AND RELAY FEEDS (COVER OFF)

TOP VIEW SCALE 1:2

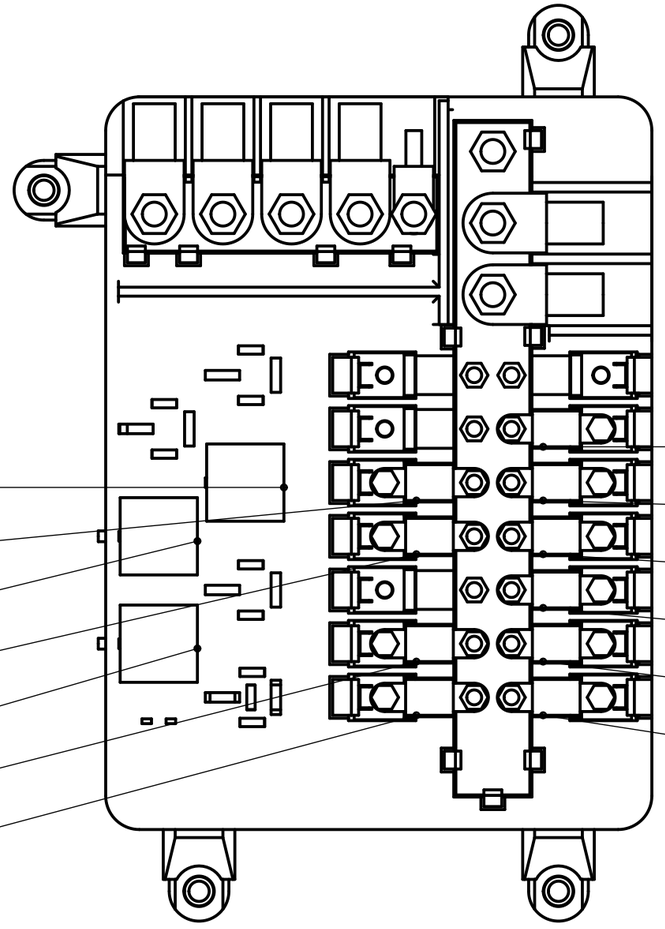

K-FAN2 (CONDENSER FAN) 13

IN-5 FAN2 30A - COND FAN RELAY K-FAN2 9

K-FAN (RADIATOR FAN) 13

IN-4 FAN 30A - RAD FAN RELAY K-FAN 9

K-EFI (EFI MAIN) 13

IN-2 EFI 30A - EFI RELAY K-EFI 9

IN-1 HTR 40A - R/B No.4 HEATER FUSE (HTR-1) 10

11 OUT-6 EPS 50A - EPS PUMP RELAY K-EPS 30

12 OUT-5 JB1 60A - J/B 1 MAIN B+ (1I-1)

9 OUT-4 AM2 30A - IGNITION SW AM2 (IE1-17)

10 OUT-3 AM1 40A - IGNITION SW AM1 (IE1-10)

9 OUT-2 RTR 30A - RETRACT RELAY (IE1-3)


11 OUT-1 BUS1 50A - LOGIC BOX BUS 1

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT	ST185 CELICA GT-FOUR - LINK ECU CONVERSION				
TITLE	POWER FUSE BOX - ASSEMBLY				
PART / DWG NO.	REV	MATERIAL			
ST185-FB-100P	AA	SEE BOM			
SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2	mm	B (11x17)	2 OF 9	2026-11-13	DG
SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step					3RD ANGLE

HARNESS WIRES AT THE BUS STUDS (COVER OFF)

TOP VIEW SCALE 1:2

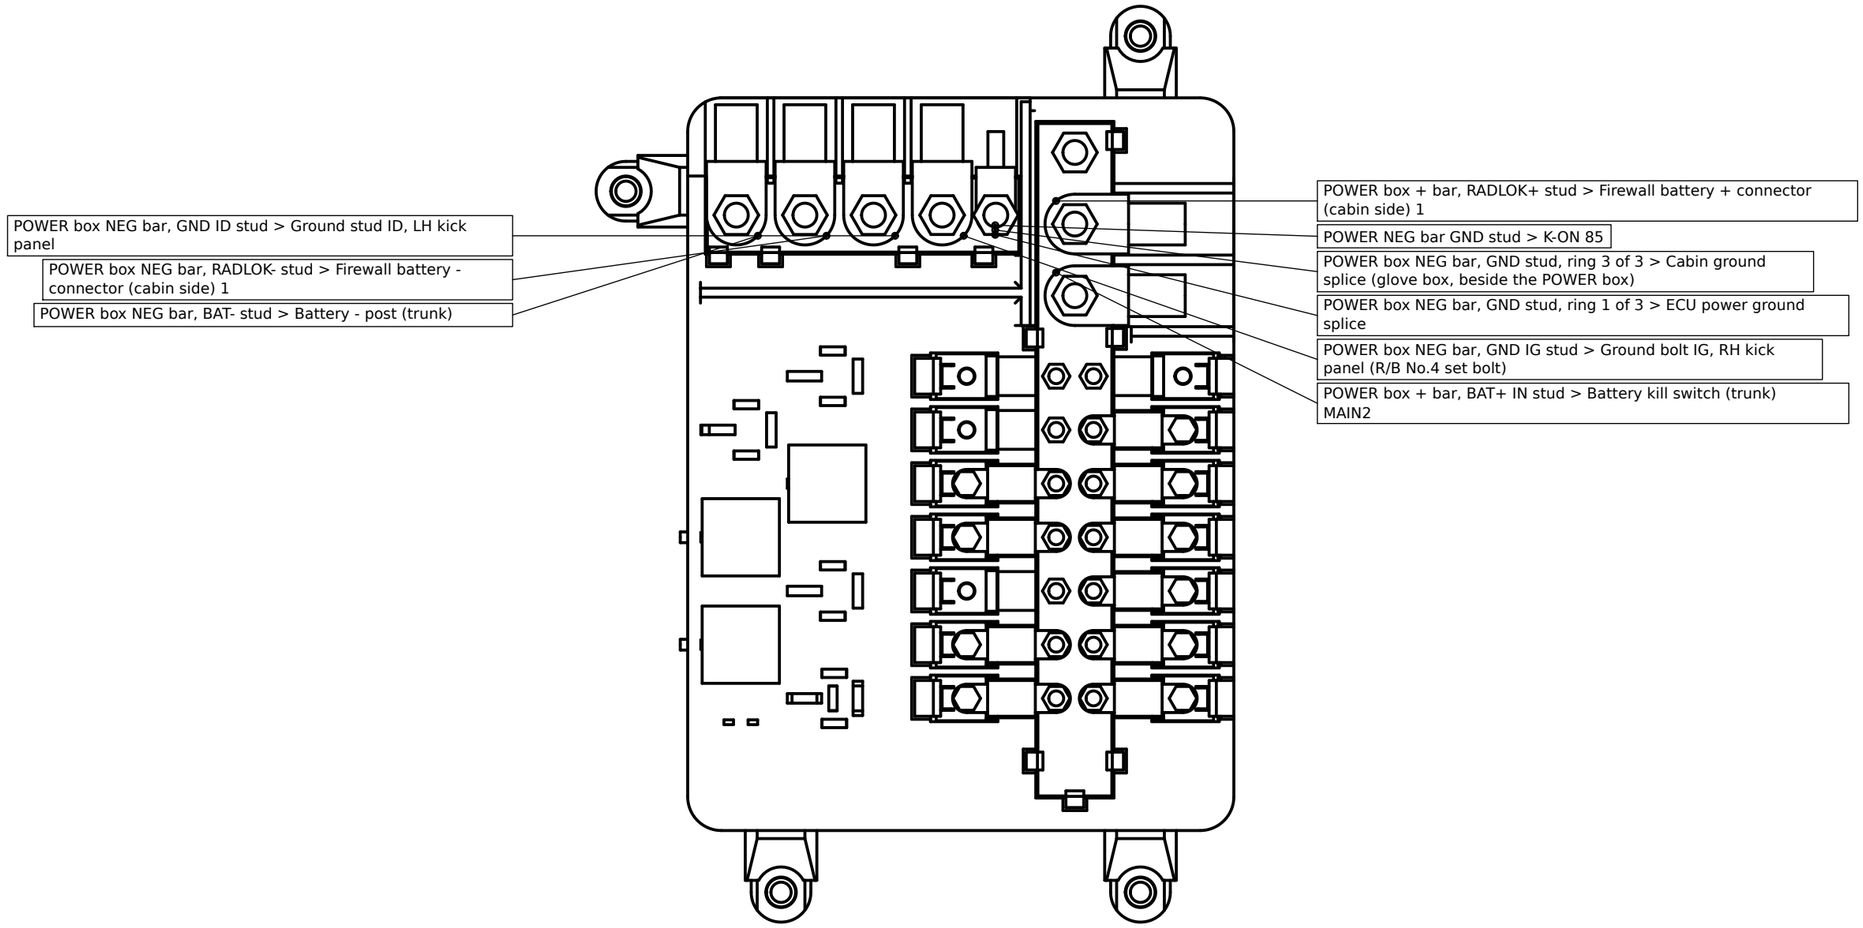

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	**AA**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2	mm	B (11x17)	3 OF 9	2026-11-13	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

HARNESS WIRES AT THE C-STRAP LUGS - SEEN FROM BELOW, BELLY PAN OFF

BOTTOM VIEW SCALE 1:2

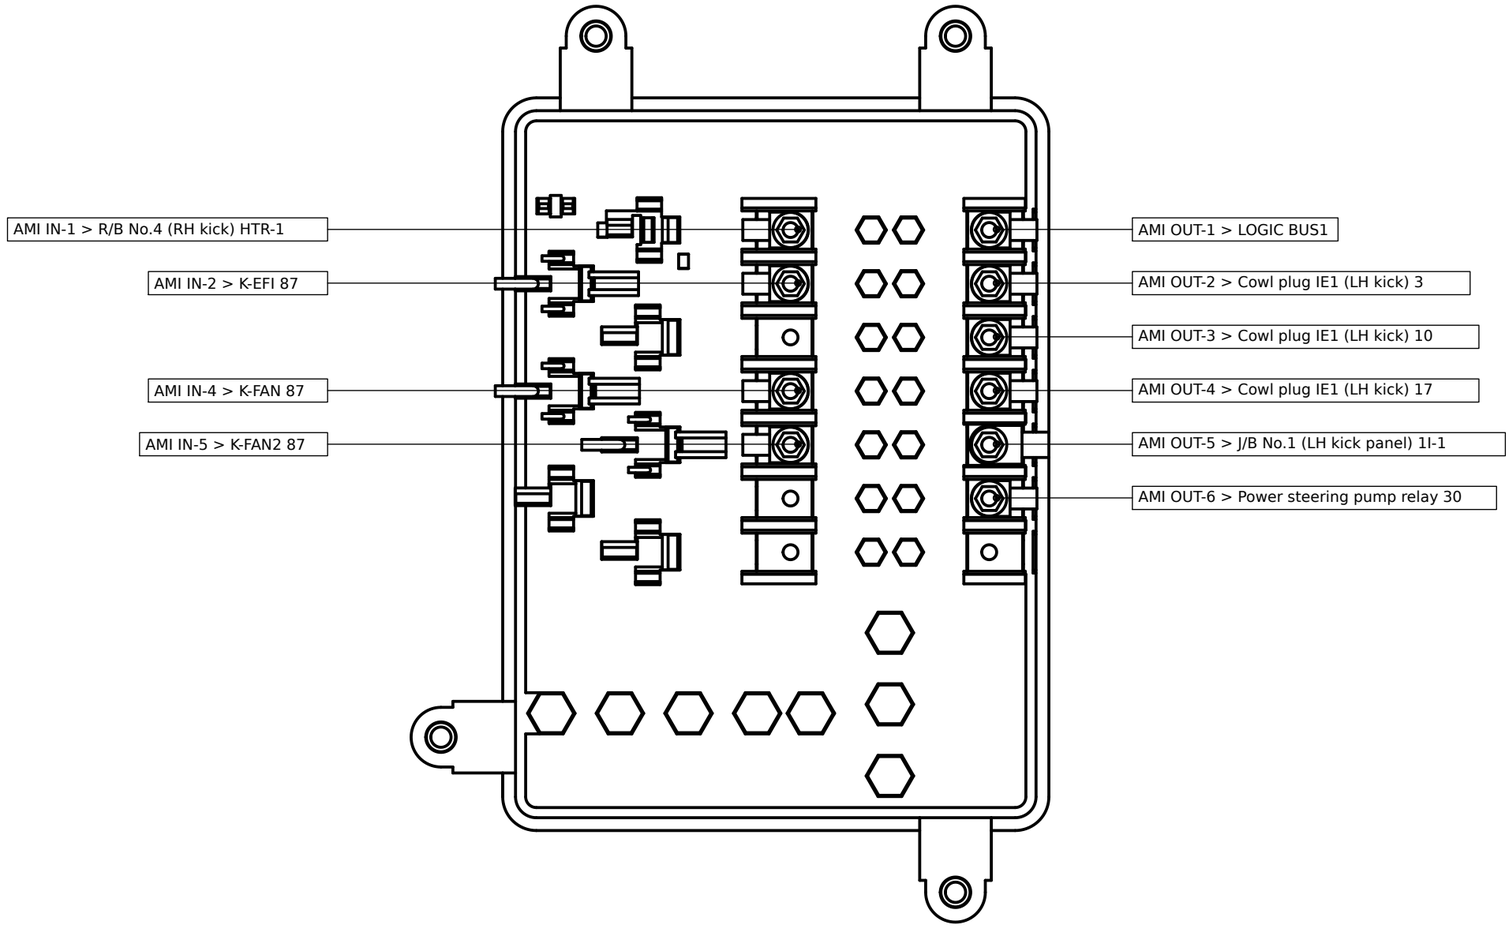

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	**AA**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2	mm	B (11x17)	4 OF 9	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

HARNESS WIRES AT THE RELAYS - SEEN FROM BELOW, BELLY PAN OFF

BOTTOM VIEW SCALE 1:2

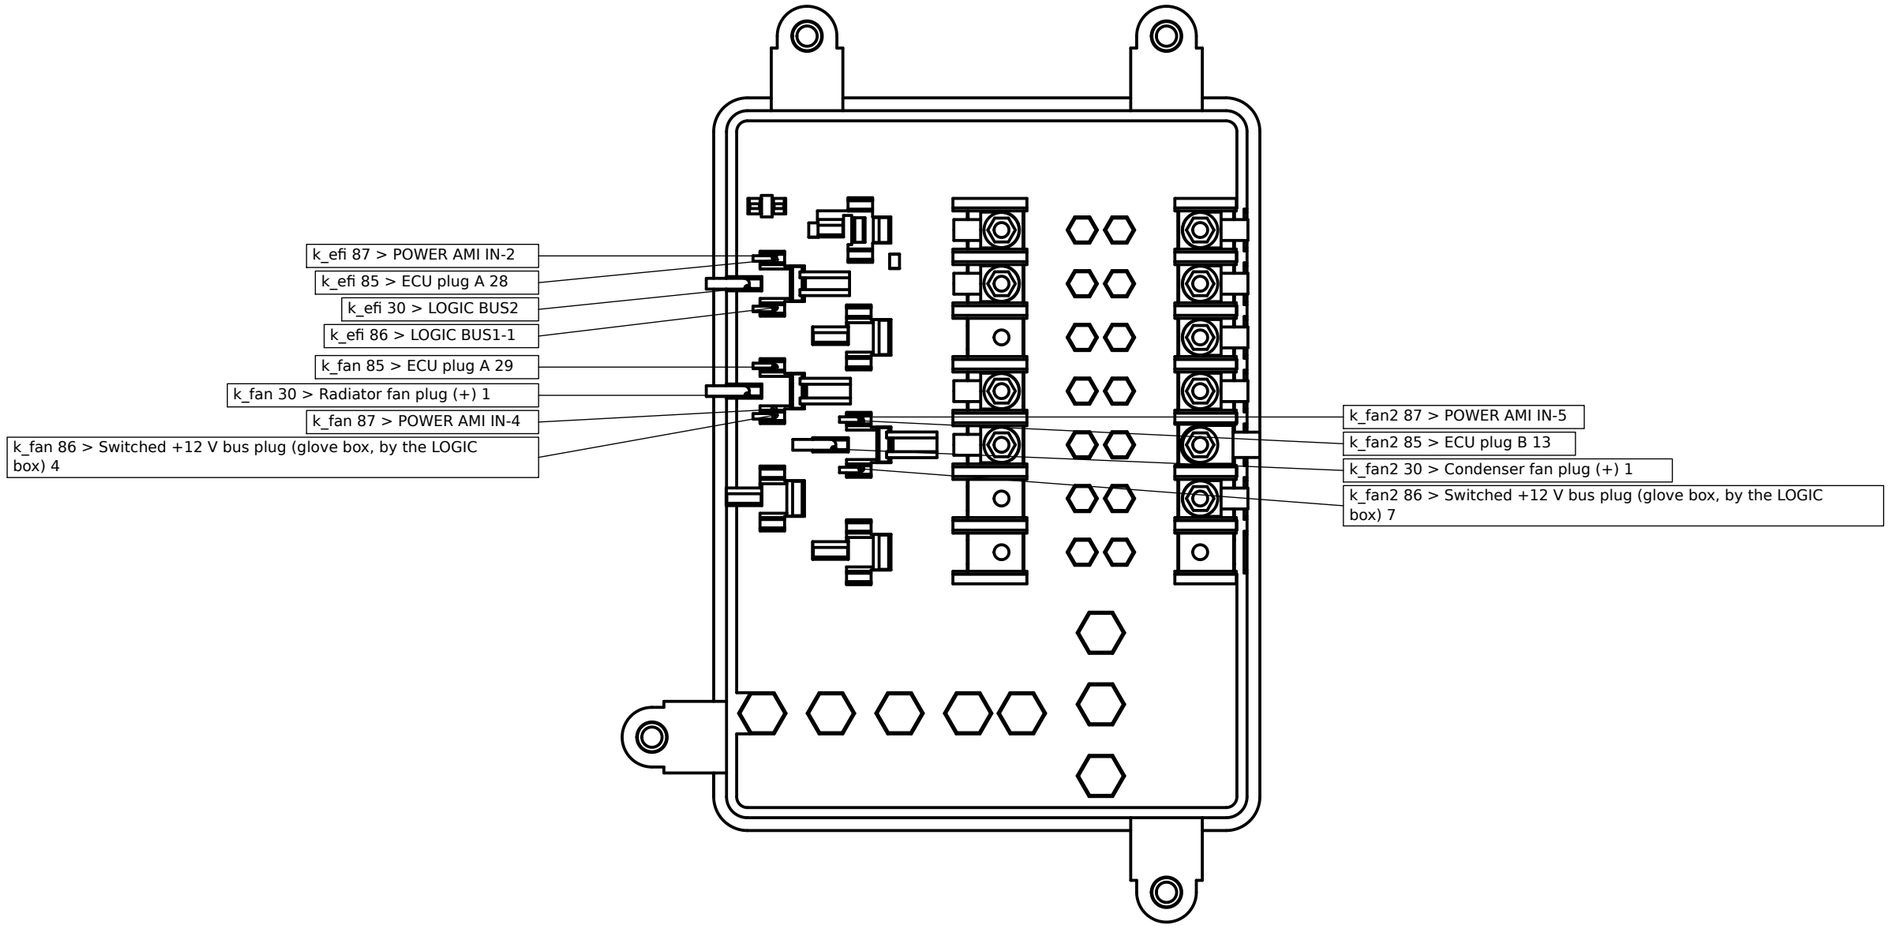

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	**AA**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:2	mm	B (11x17)	5 OF 9	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE


STEP 1: LIMITERS; BAR BOLTS FROM BELOW

EXPLODED TRIMETRIC (NOT TO SCALE)

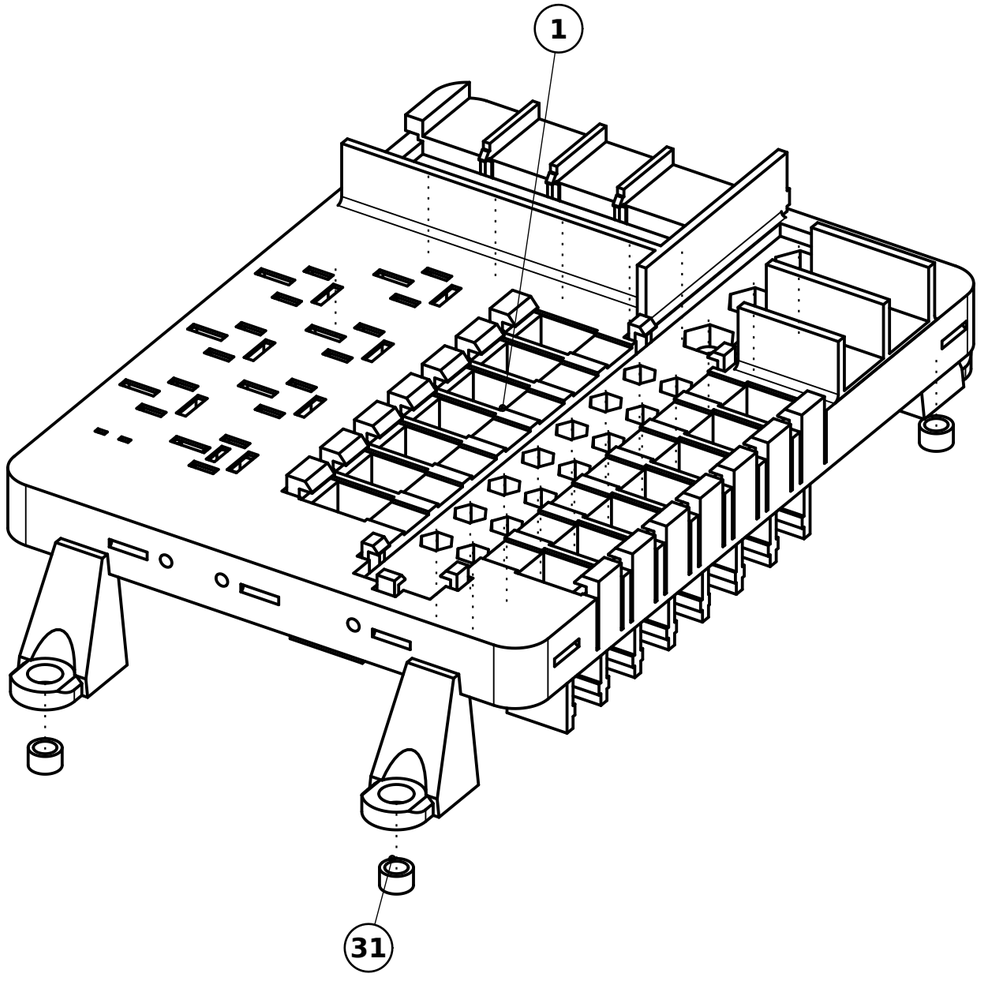

STEP 2: BARS; C-STRAPS STRAIGHT DOWN

EXPLODED TRIMETRIC (NOT TO SCALE)

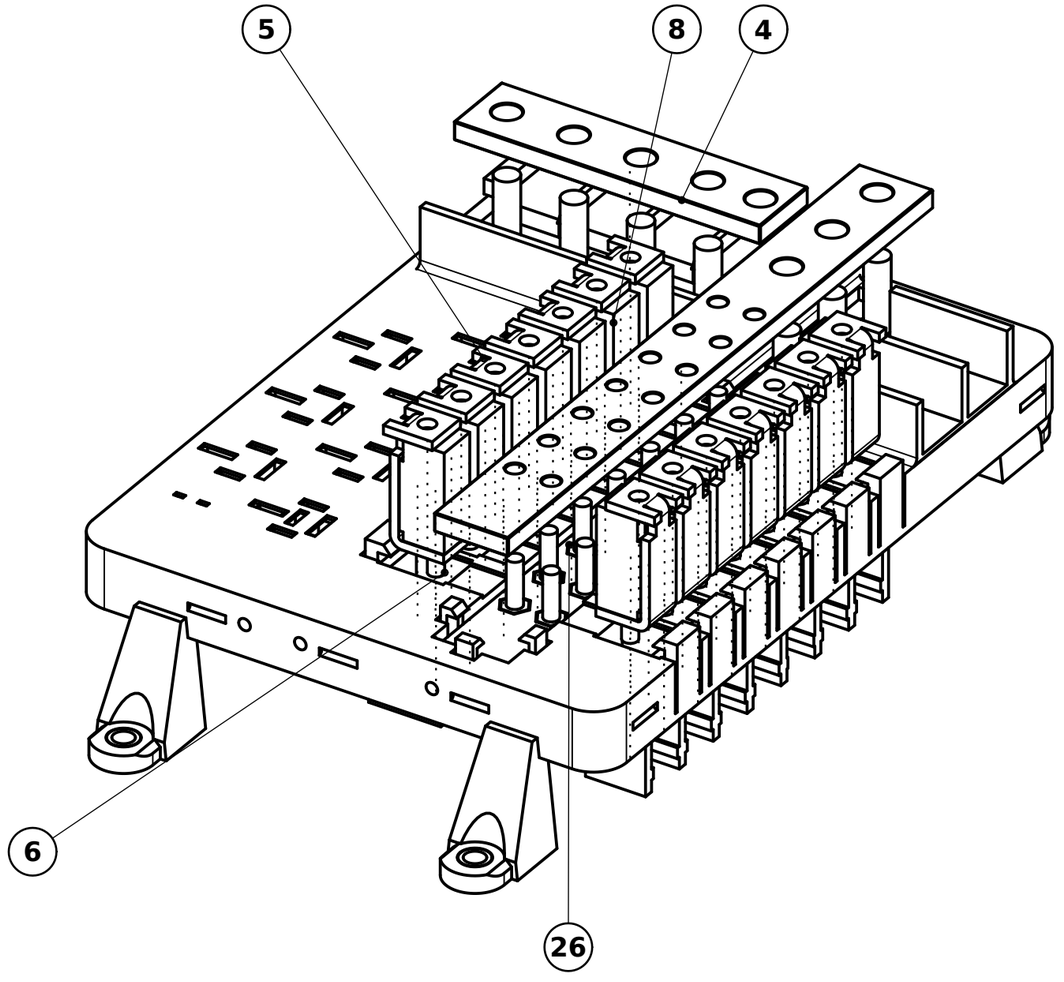

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	**AA**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	6 OF 9	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

STEP 3: TERMINALS, R1 CLIP, LUGS UNDER THE STRAPS

EXPLODED, SEEN FROM BELOW (NOT TO SCALE)

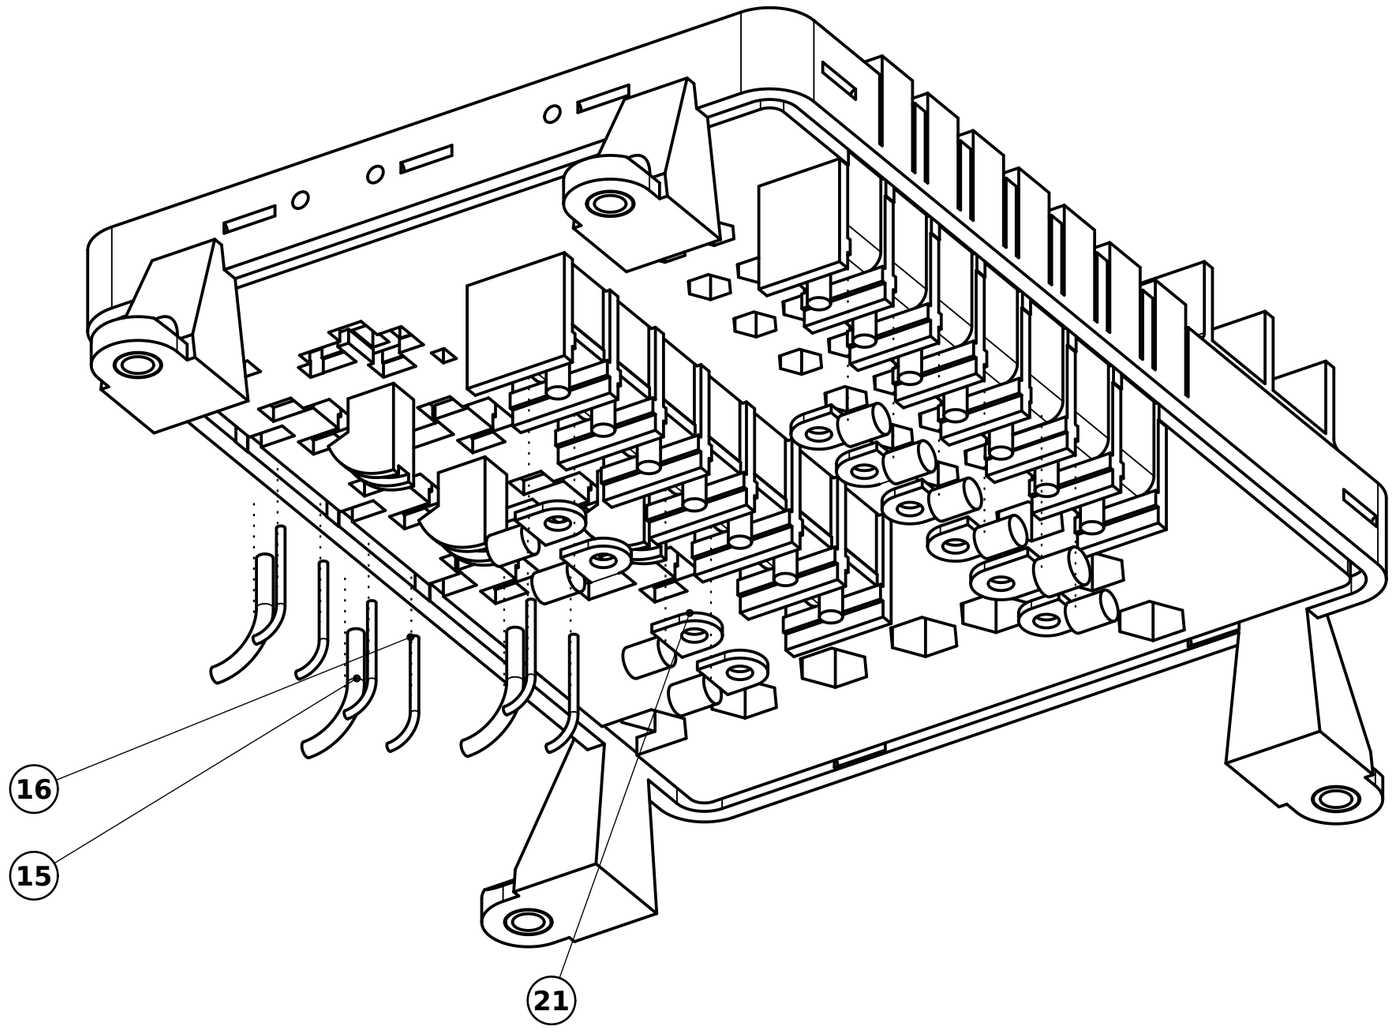


UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT	ST185 CELICA GT-FOUR - LINK ECU CONVERSION				
TITLE	POWER FUSE BOX - ASSEMBLY				
PART / DWG NO.	REV	MATERIAL			
ST185-FB-100P	AA	SEE BOM			
SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	7 OF 9	2026-11-13	DG
SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step					3RD ANGLE

STEP 4: FUSES, EAR BOLTS, NUTS, LUGS, RELAYS

EXPLODED TRIMETRIC (NOT TO SCALE)

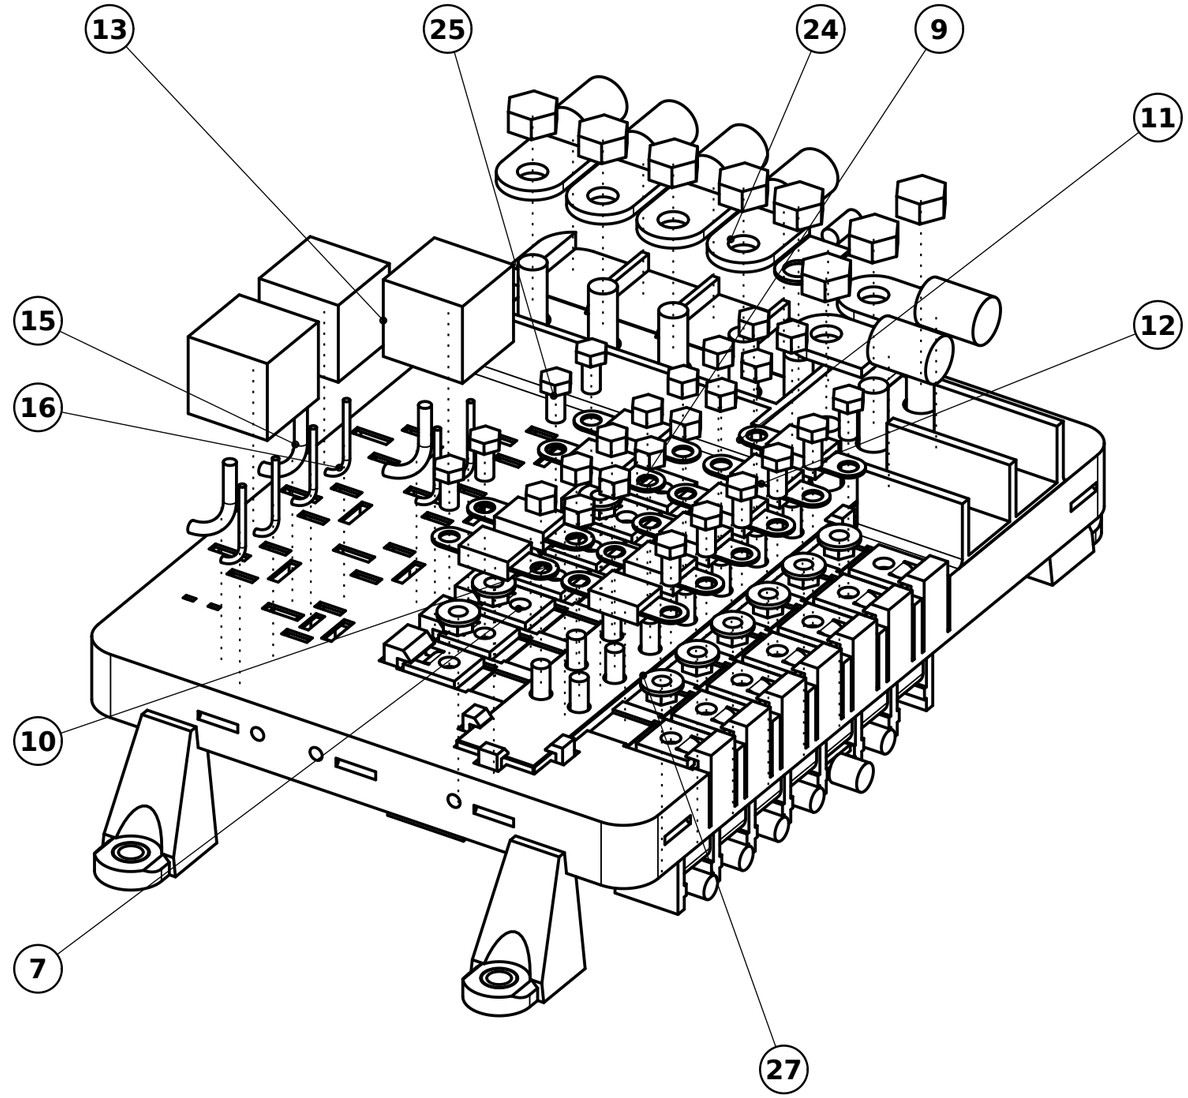

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	**AA**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	8 OF 9	2026-11-13	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

STEP 5: BELLY PAN + COVER

EXPLODED TRIMETRIC (NOT TO SCALE)

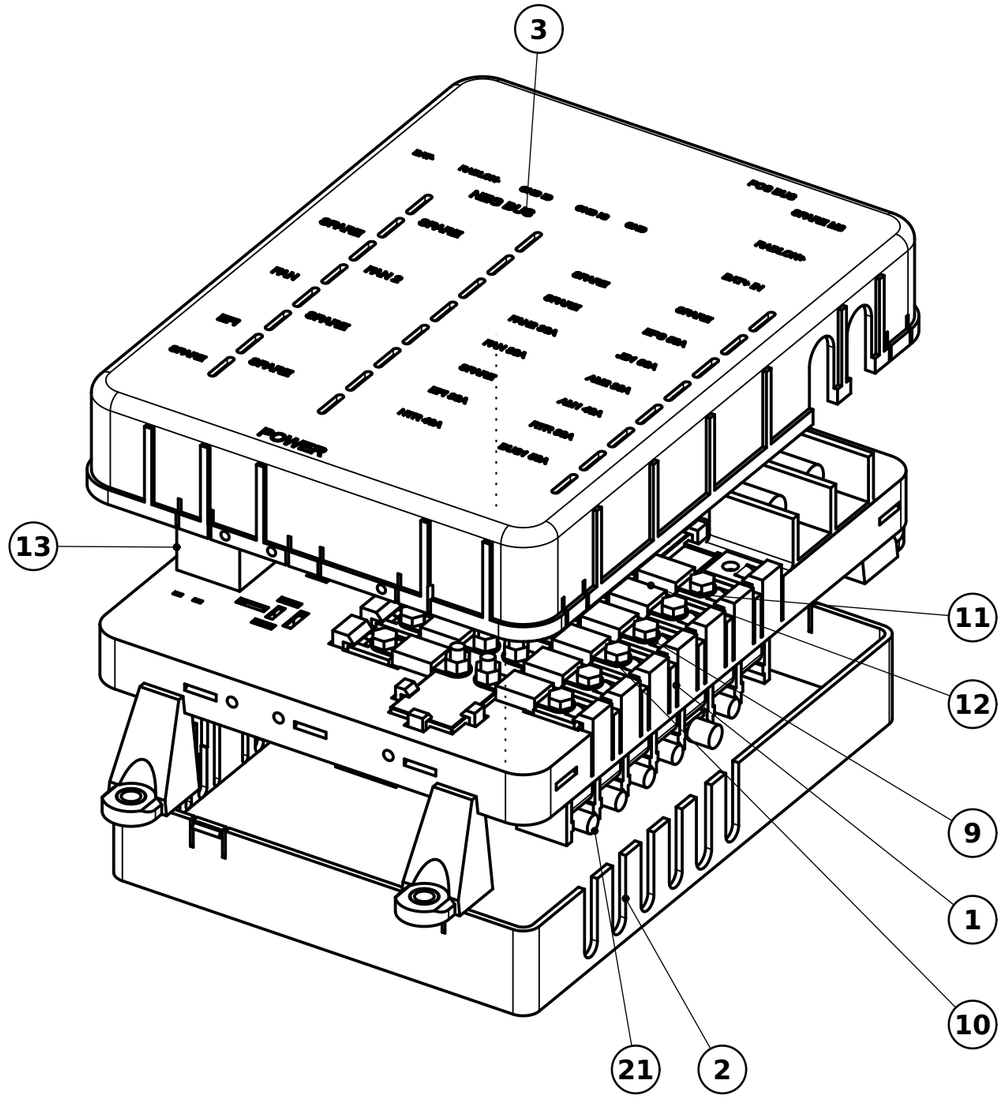

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
POWER FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100P	**AA**	SEE BOM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	9 OF 9	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE