


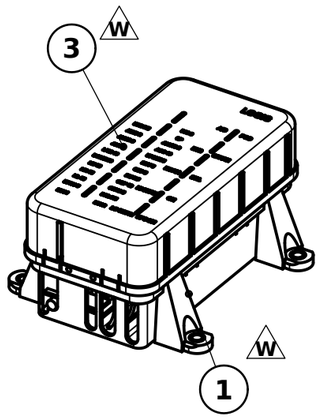


TRIMETRIC VIEW



TRIMETRIC - COVER REMOVED



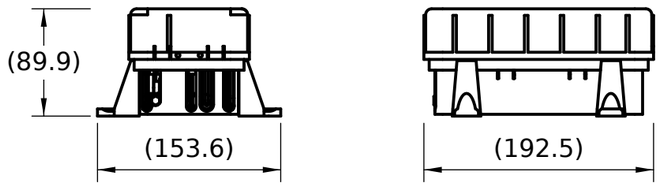

FRONT / TOP / RIGHT VIEWS SCALE 1:5

NOTES:

1. OVERALL SIZES ARE FOR REFERENCE.
2. PARTS THAT SHARE ONE MODEL (THE MICRO RELAYS, LUGS, JUMPER WIRES) ARE BALLOONED ON THE FIRST ITEM OF THEIR GROUP.
3. USE THE M5 x 10 FEED BOLT, NOT A SHORTER ONE: ITS TIP GOES 1.7 INTO THE SPINE AND LOCKS THE STRIP.
4. SHEET 2: WHAT EACH FUSE AND RELAY FEEDS. SHEETS 3 AND 4: THE HARNESS WIRE AT EACH TERMINAL, NAMED AS ON THE HARNESS DRAWINGS.
5. TERMINALS GO IN FROM UNDER THE DECK, CONTACT BOX FIRST, UNTIL THE LANCE CLICKS. PULL THE WIRE BACK GENTLY TO CHECK IT HOLDS (TE 114-2025 3.6, 114-20021 3.7).
6. KEEP HARNESS TIES AT LEAST 38 mm BELOW THE DECK, AND DO NOT BEND THE WIRES HARD TO ONE SIDE AT THE DECK (TE 114-20021 3.7 C).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

REVISIONS

REV	DESCRIPTION	BY	DATE
R	#275: FB-105 base N	DG	17/10/26
S	#297: FB-105 base P, FB-106 pan G, FB-107 cover J, FB-115 / -116 strips E	DG	18/10/26
T	#303: FB-105 base R, FB-106 pan H, FB-107 cover K	DG	18/10/26
U	#308: FB-105 base S; first assembly drawing (buildability review 18/10/26)	DG	18/10/26
V	FB-105 base T (strip hold-downs)	DG	18/10/26
W	Fuse box rev 8 (Dan A15 b): rev 8 parts and parts list - box wires with in-box solder splices (A20 a), ATUM sleeve, rev 8 relay seats	DG	13/11/26

W

ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL / SPEC
1	1	ST185-FB-105	LOGIC BASE	PA12, 3D PRINTED
2	1	ST185-FB-106	LOGIC PAN (BELLY PAN)	PA12, 3D PRINTED
3	1	ST185-FB-107	LOGIC COVER	PA12, 3D PRINTED
4	1	ST185-FB-115/-116	LOGIC BUS STRIPS BUS1 + BUS2	C110 Cu, TINNED
5	19	PEM S-M4-2ZI	SELF-CLINCHING NUT M4, PRESSED INTO THE STRIP	C110 Cu, TINNED
6	2	PEM SS-M5-2ZI	SELF-CLINCHING NUT M5, PRESSED INTO THE STRIP	C110 Cu, TINNED
7	4	ATM-2	MINI BLADE FUSE 2 A (ATM)	PURCHASED
8	6	ATM-5	MINI BLADE FUSE 5 A (ATM)	PURCHASED
9	3	ATM-7-1/2	MINI BLADE FUSE 7.5 A (ATM)	PURCHASED
10	3	ATM-10	MINI BLADE FUSE 10 A (ATM)	PURCHASED
11	3	ATM-15	MINI BLADE FUSE 15 A (ATM)	PURCHASED
12	1	ATM-20	MINI BLADE FUSE 20 A (ATM)	PURCHASED
13	2	4-1904124-2	MICRO RELAY (ALL 7 POSITIONS)	PURCHASED
14	2	4-1904124-3	MICRO RELAY: K-HORN, K-POD (SEE NOTE 2) (NOT SHOWN)	PURCHASED
15	2	5-1393292-8	MICRO RELAY: K-HL, K-HR (SEE NOTE 2) (NOT SHOWN)	PURCHASED
16	3	6-1419137-4	MICRO RELAY: K-ACC, K-EPS-EN, K-ON (SEE NOTE 2) (NOT SHOWN)	PURCHASED
17	25	1-968849-1	MINI FUSE RECEPTACLE MCP 2.8, 20 / 18 AWG	PURCHASED
18	15	1-968851-1	MINI FUSE RECEPTACLE MCP 2.8, 16 / 14 AWG	PURCHASED
19	18	280919-2	MICRO RELAY COIL RECEPTACLE 4.8 X 0.8	PURCHASED
20	18	42281-1	RELAY RECEPTACLE 6.3 X 0.8, 18-14 AWG	PURCHASED
21	1	RNF-100-1/8-0-STK	INSULATION BUILD-UP SLEEVE 1/8 (NOT SHOWN)	PURCHASED
22	1	RNF-100-3/32-0-STK	INSULATION BUILD-UP SLEEVE 3/32 (NOT SHOWN)	PURCHASED
23	1	J1128-TXL-8-RED	BOX WIRE TXL 8 AWG RED (NOT SHOWN)	PURCHASED
24	1	J1128-TXL-10-RED	BOX WIRE TXL 10 AWG RED (NOT SHOWN)	PURCHASED
25	2	J1128-TXL-14-RED	BOX WIRE TXL 14 AWG RED (NOT SHOWN)	PURCHASED
26	3	J1128-TXL-16-RED	BOX WIRE TXL 16 AWG RED (NOT SHOWN)	PURCHASED
27	3	J1128-TXL-18-RED	BOX WIRE TXL 18 AWG RED (NOT SHOWN)	PURCHASED
28	1	J1128-TXL-20-BLACK	BOX WIRE TXL 20 AWG BLACK (NOT SHOWN)	PURCHASED
29	1	ATUM-6/2-0-STK	ADHESIVE-LINED HEAT SHRINK 6.0 / 2.0 MM (NOT SHOWN)	PURCHASED
30	4	94459A140	M3 HEAT-SET INSERT (OPTIONAL COVER BACKUP) (NOT SHOWN)	BRASS
31	4	SSCF-M3-10-A4	M3 x 10 CAP SCREW (OPTIONAL COVER BACKUP) (NOT SHOWN)	A4 STAINLESS
32	15	320554	INPUT JUMPER RING LUG, 22-16 AWG, #8 / M4	Cu, TINNED
33	4	53941-1	INPUT JUMPER RING LUG, 16-14 AWG, #8 / M (SEE NOTE 2) (NOT SHOWN)	Cu, TINNED
34	1	M22759/16-14-2	INPUT JUMPER WIRE 14 AWG, ~60 MM EACH	PURCHASED
35	1	M22759/16-16-2	INPUT JUMPER WIRE 16 AWG, ~60 MM EACH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
36	1	M22759/16-18-2	INPUT JUMPER WIRE 18 AWG, ~60 MM EACH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
37	1	M22759/16-20-2	INPUT JUMPER WIRE 20 AWG, ~60 MM EACH (SEE NOTE 2) (NOT SHOWN)	PURCHASED
38	19	RS 287-3915	HEX BOLT M4 X 8, INTO THE PEM NUT IN THE STRIP	A2 STAINLESS
39	19	RS 231-0691	SPRING WASHER M4 UNDER EACH JUMPER BOLT HEAD	A2 STAINLESS
40	2	Klauke 2R5	TUBULAR LUG 10 MM2, M5 HOLE	Cu, TINNED
41	2	RS 287-3921	HEX BOLT M5 X 10, FEED LUG INTO THE PEM SS-M5...	A2 STAINLESS
42	4	EFC 10S00056	COMPRESSION LIMITER, FEET (4)	STEEL, ZINC

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	W	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:5	mm	B (11x17)	1 OF 6	2026-11-13	DG

SOURCE C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

WHAT EACH FUSE AND RELAY FEEDS (COVER OFF)

TOP VIEW SCALE 1:1.5

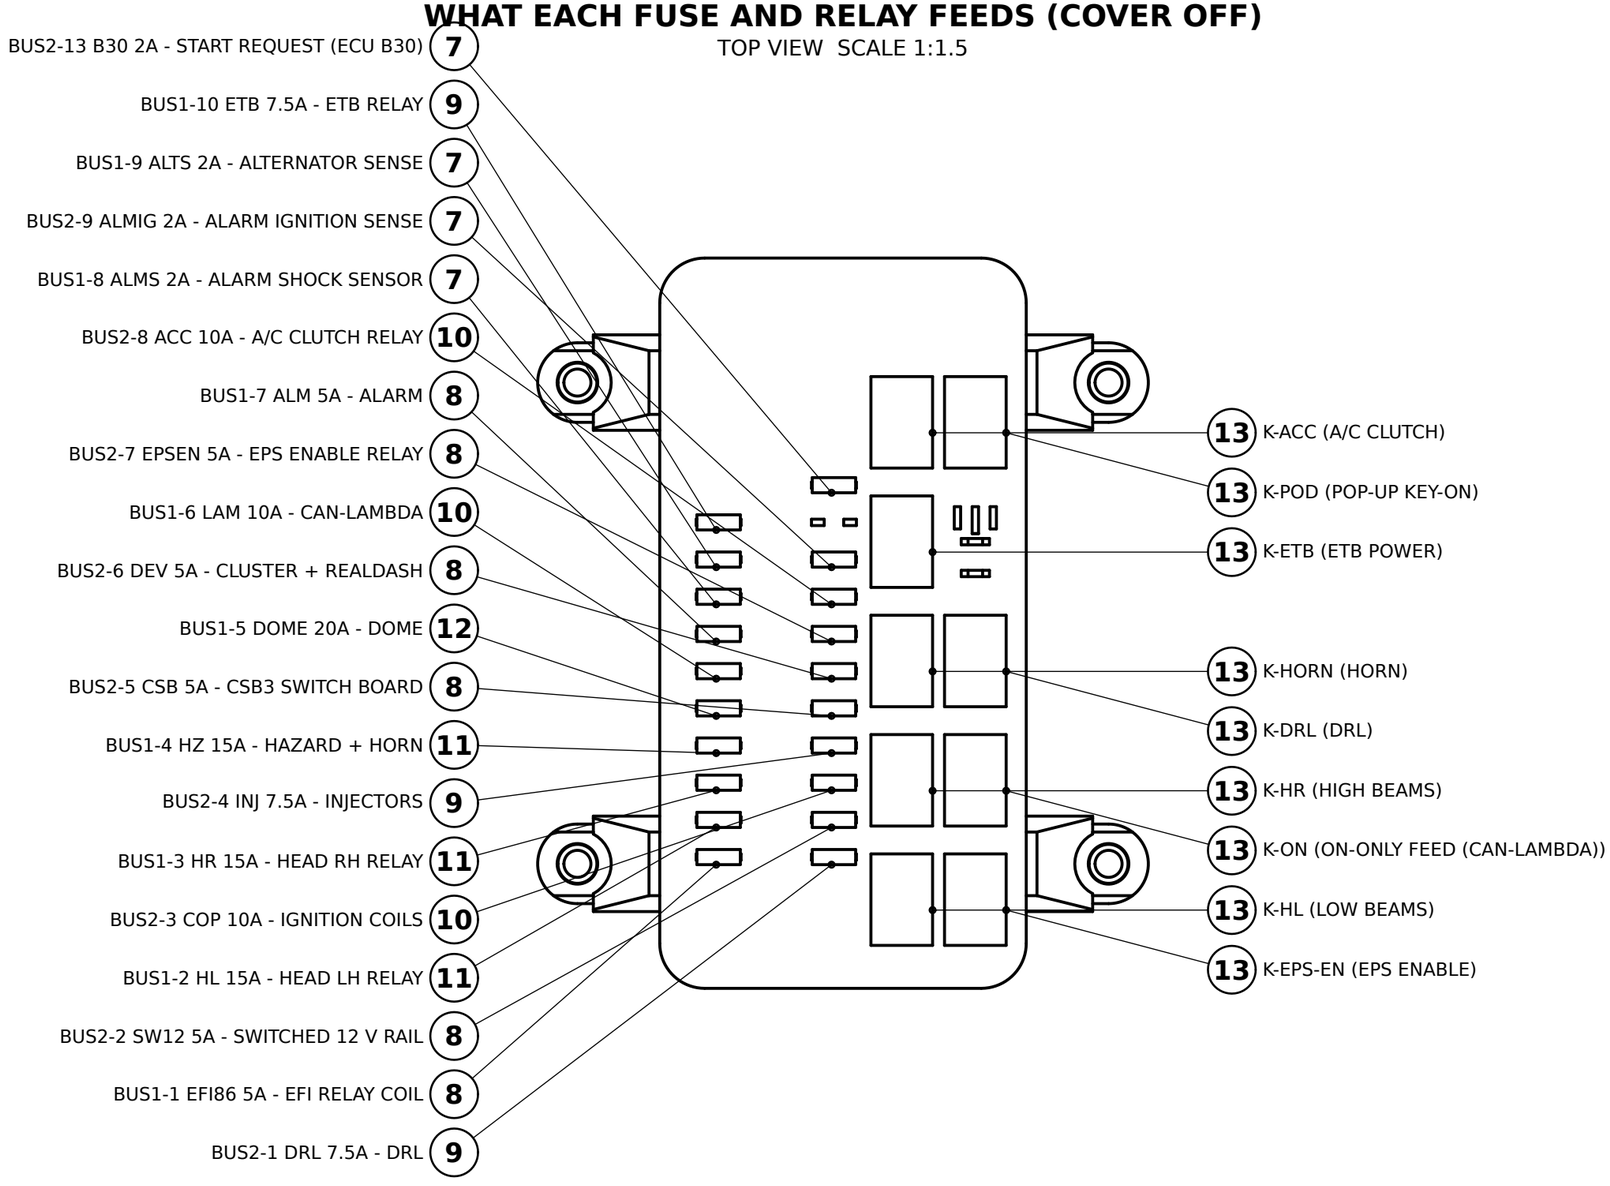

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	**W**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	2 OF 6	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

HARNESS WIRES AT THE FUSES - SEEN FROM BELOW, BELLY PAN OFF

BOTTOM VIEW SCALE 1:1.5

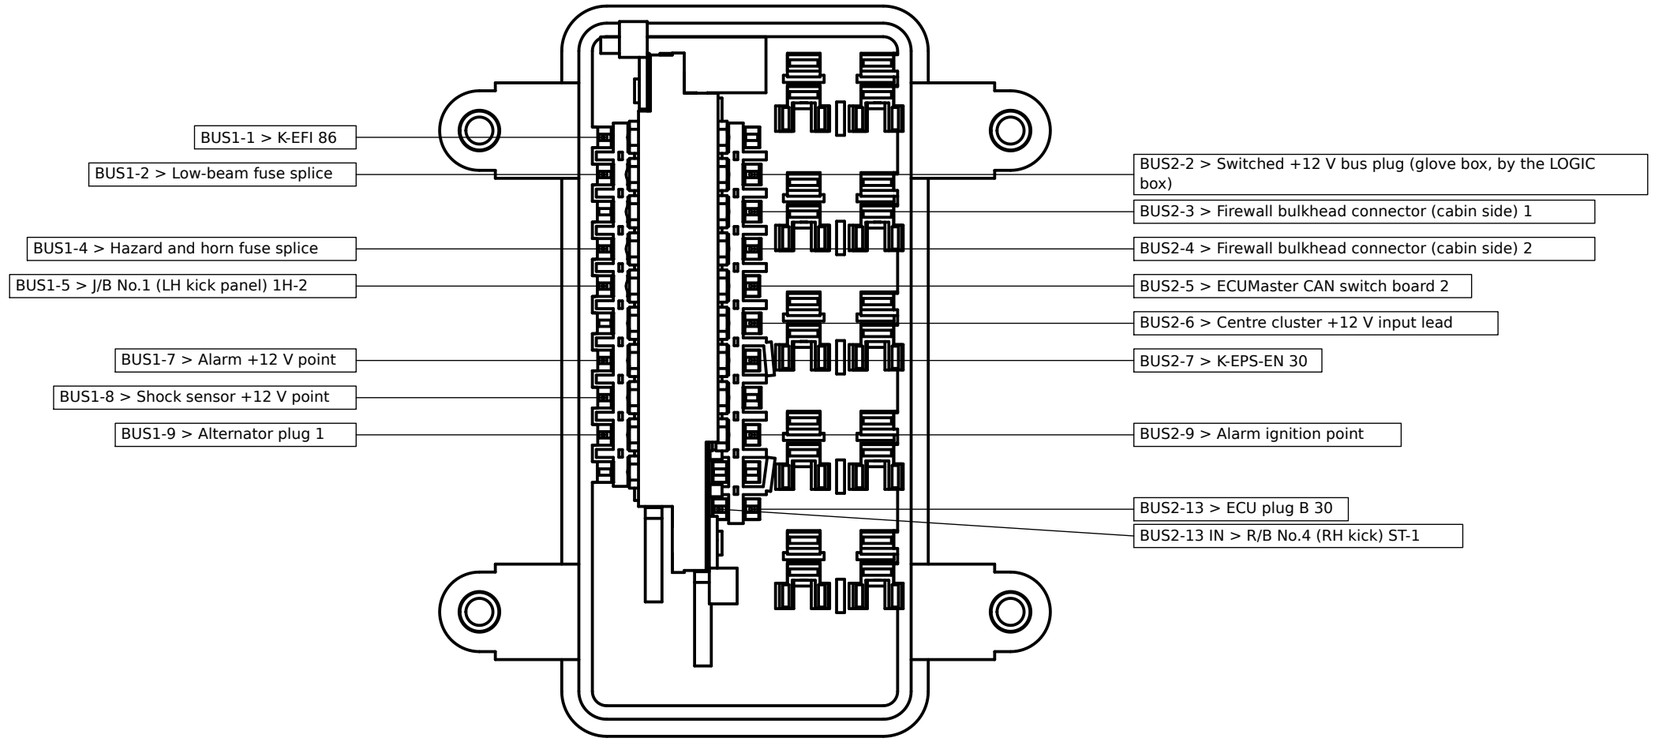

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	**W**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	3 OF 6	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE

HARNESS WIRES AT THE RELAYS - SEEN FROM BELOW, BELLY PAN OFF

BOTTOM VIEW SCALE 1:1.5

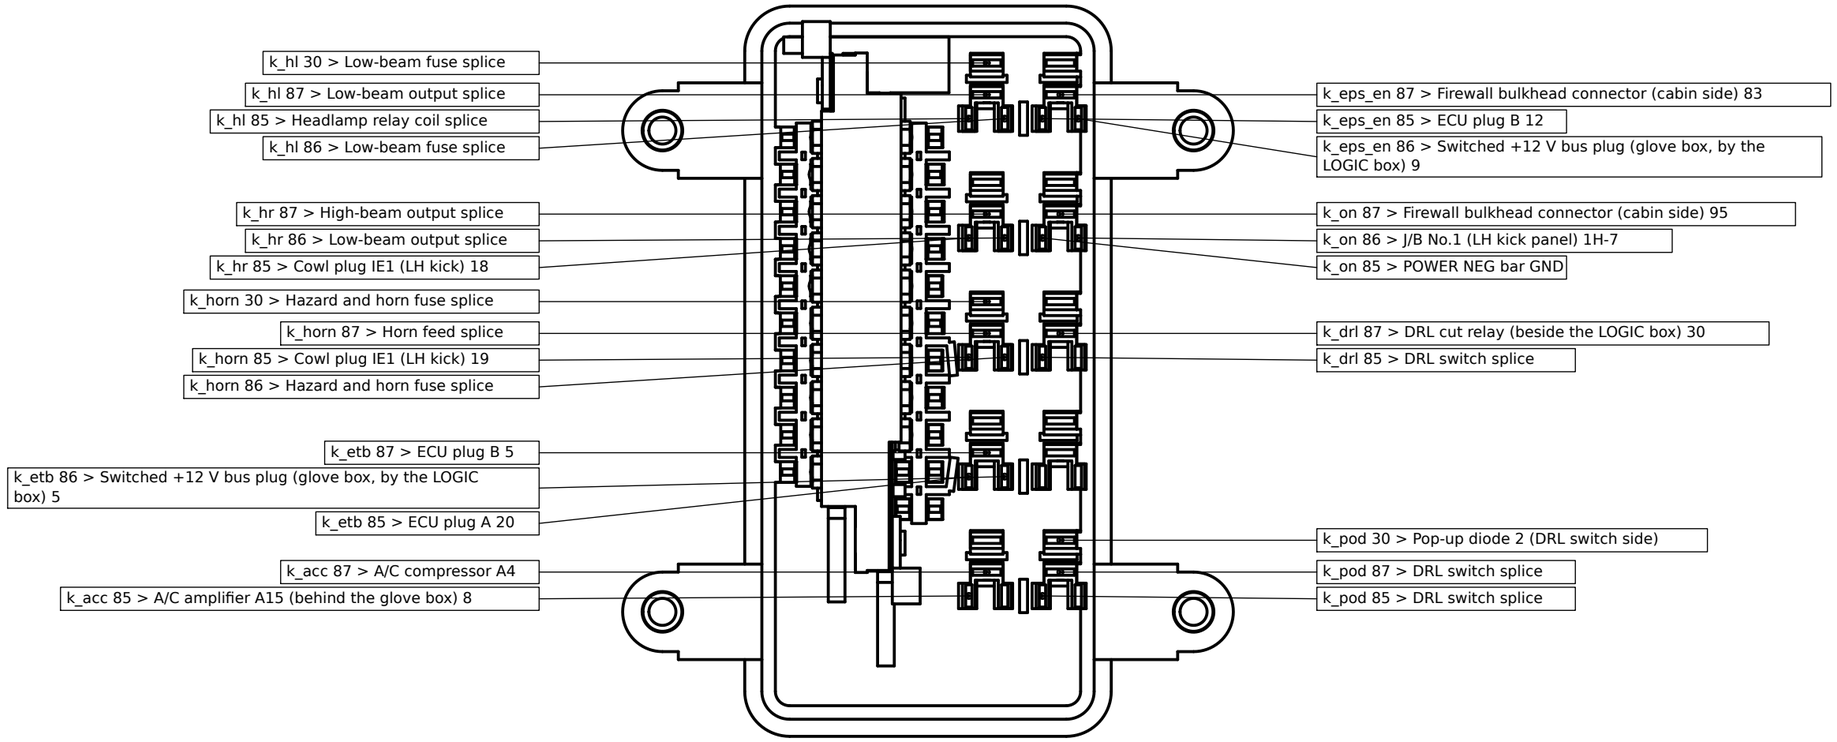

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	**W**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
1:1.5	mm	B (11x17)	4 OF 6	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE


STEP 1: PRESS A PEM NUT INTO EVERY STRIP HOLE

EXPLODED TRIMETRIC (NOT TO SCALE)

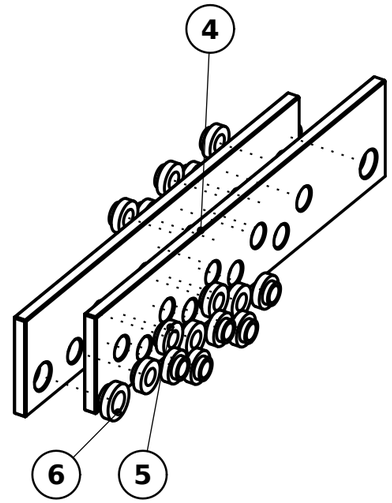


STEP 2: LIMITERS; STRIPS IN FROM THE REAR TILL THE HOOK CLICKS

EXPLODED TRIMETRIC (NOT TO SCALE)

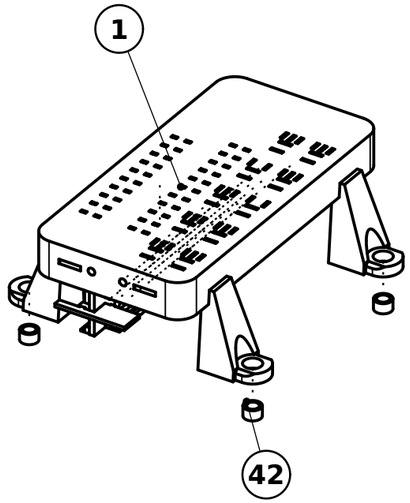


STEP 3: TERMINALS UP INTO THE CAVITIES

EXPLODED, SEEN FROM BELOW (NOT TO SCALE)

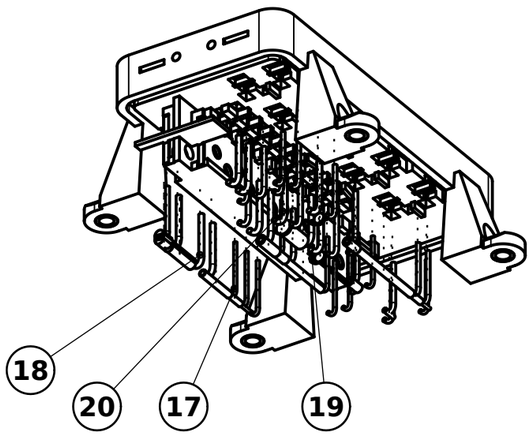

STEP 4: FEED LUGS ON THE M5 x 10 FEED BOLTS

EXPLODED, SEEN FROM BELOW (NOT TO SCALE)

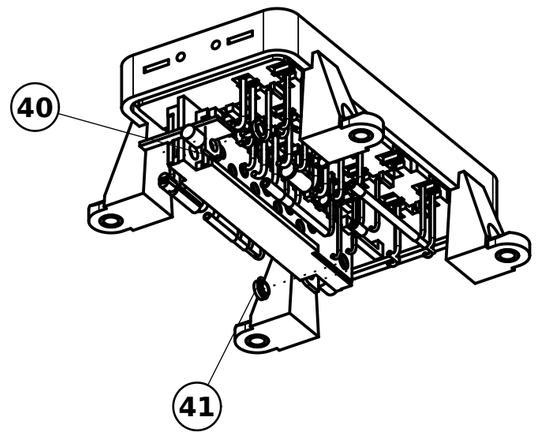

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	**W**	SEE BOM


SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	5 OF 6	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE


STEP 5: JUMPERS: WIRE, LUG, WASHER, M4 x 8 BOLT

EXPLODED, SEEN FROM BELOW (NOT TO SCALE)

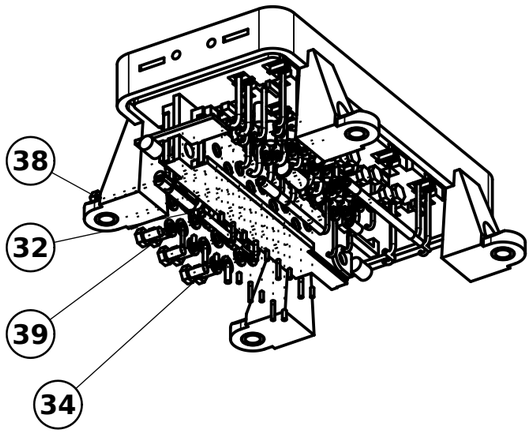


STEP 6: FUSES AND RELAYS IN FROM THE TOP

EXPLODED TRIMETRIC (NOT TO SCALE)

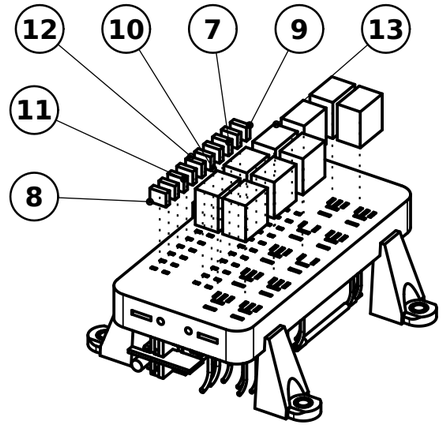

STEP 7: BELLY PAN AND COVER

EXPLODED TRIMETRIC (NOT TO SCALE)

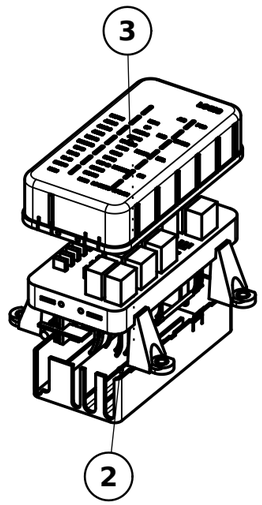

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
ST185 CELICA GT-FOUR - LINK ECU CONVERSION

TITLE
LOGIC FUSE BOX - ASSEMBLY

PART / DWG NO.	REV	MATERIAL
ST185-FB-100L	**W**	SEE BOM

SCALE	UNITS	SIZE	SHEET	DATE	DRAWN
AS SHOWN	mm	B (11x17)	6 OF 6	2026-11-13	DG

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev8\\ST185_fusebox_rev8_assembly.step

3RD ANGLE