


TOP VIEW - BODY (lid removed) scale 1.2:1

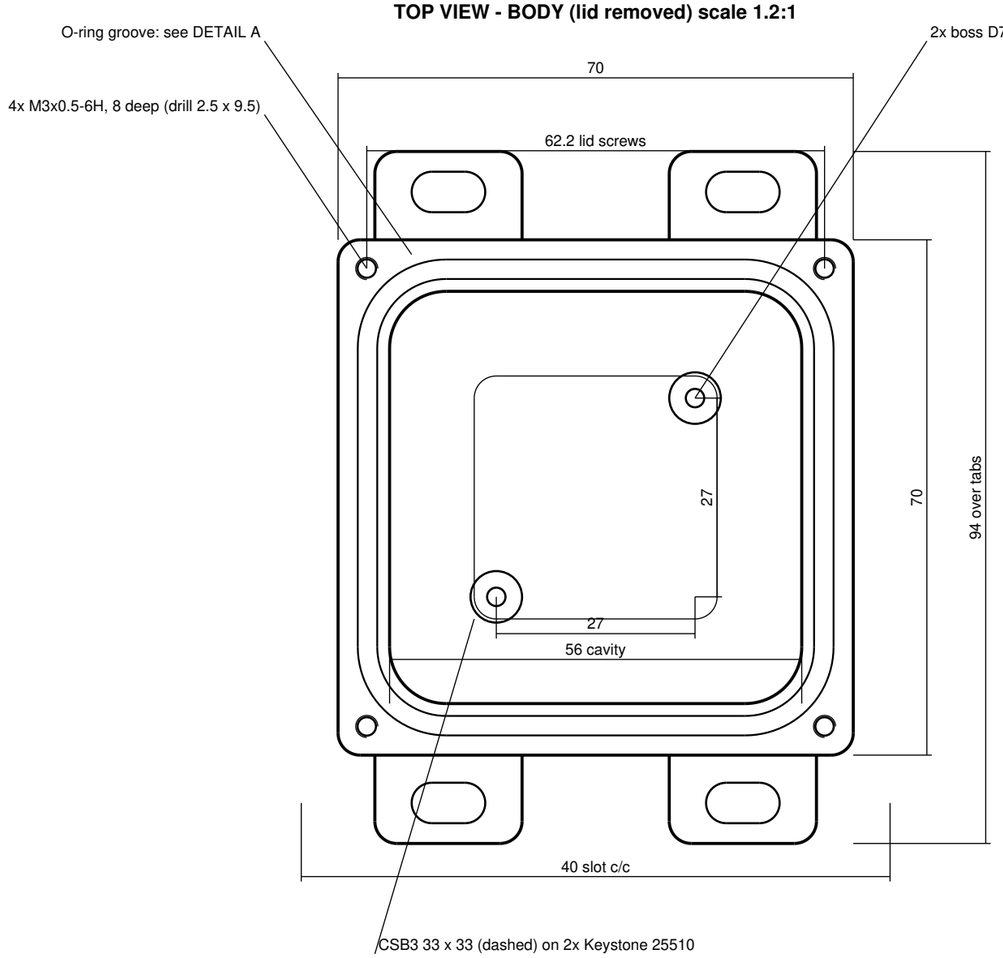


SECTION B-B (through connector) scale 1:1

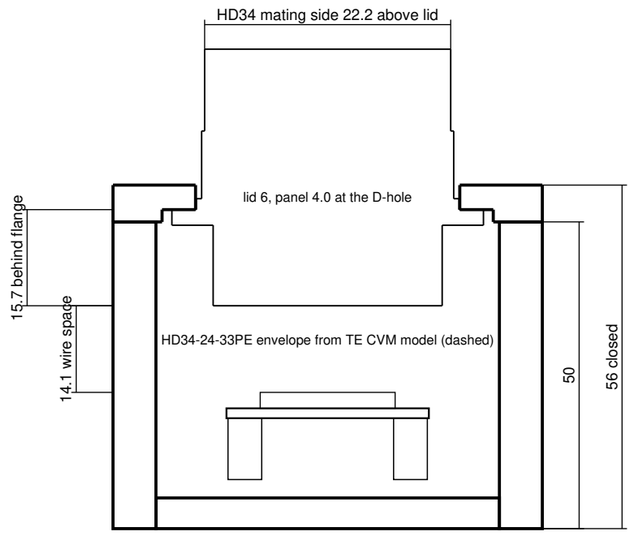

LID 70 x 70 x 6 (top) scale 1.2:1

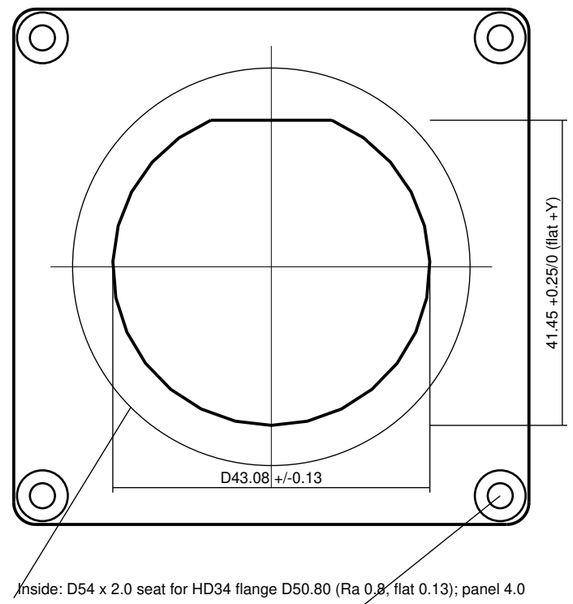

DETAIL A - O-ring groove scale 6:1



Parker ORD 5700 Design Chart 4-3, W 1.78 face seal, liquids

groove R 0.13-0.38, break edges 0.13, Ra 0.8 (32 rms) groove + lid face

squeeze 26 % nominal, fill 71 %; AS568-039 stretched ~2.4 % on centreline

NOTES - CSB3 box

1. 6061-T6 billet body + lid. Stock est.: body 75 x 100 x 53, lid 75 x 75 x 8.
2. Seal: AS568-039 (same groove length 229.6 as the VRC box), compound TBD (E4).
3. Lid: 4x M3 x 12 ISO 10642 A2 countersunk, tapped holes outside the O-ring.
4. Connector on LID: TE Deutsch HD34-24-33PE, jam nut. Cutout per TE 114-151014 rev A 3.3-I (D43.08 / 41.45 flat, seal face D50.80, panel 1.59-4.76). Flange inside on the D54 seat; lockwasher 112264 + panel nut 112263-90 outside, 7.4-8.4 N.m (114-151014 3.11). Nut D47.63 needs a 1-7/8 in socket above the lid. Geometry behind the flange (15.7) read from TE CVM model c-hd34-24-33pe-a-3d.stp.
5. CSB3 (33 x 33 x 4.21, 2x D3.5 holes; ECUMaster manual v2.1 p.4) on 2x Keystone 25510 nylon standoffs. 26 wires (20 AWG) contact -> pads; 14 mm clear to the board.
6. Mating HD36-24-33SE plug + boot sits above the lid: keep about 70 mm clear.
7. Mount on nylon M5 hardware (E5). Break edges 0.2; no coating on seal faces.
8. 120 ohm terminator jumper stays OPEN (csb3-bom.csv).

ST185 CSB3 ENCLOSURE

Body + lid, O-ring face seal, HD34 jam-nut receptacle on the lid

Units mm | 3rd-angle | scales as noted | 6061-T6 | General tol. ISO 2768-m unless noted

Claude Code 2026-10-13 | Fusion docs ST185-*-Enclosure (unsaved to cloud; .f3d exported) | DRAFT for Dan review