| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | BY | DATE |
| A | Initial | Claude | 14/10/26 |
| B | J1-J4 answers (R94) (#217) | Claude | 15/10/26 |
| C | SteveCAD audit v3 fixes ported into the source (#272) | Claude | 16/10/26 |
| D | Dan's N2 / N3 / N4 answers (#273); first drawing issued (#280) | Claude; drawing SteveCAD | 16/10/26 |
| E | Dan's markup 17/10/26 (23-21): spare studs deleted, the 9 studs respaced to 9.35 (PEM holes moved) | Claude | 18/10/26 |

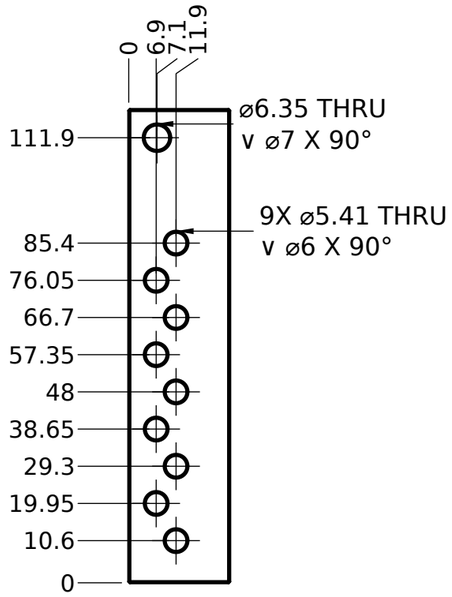


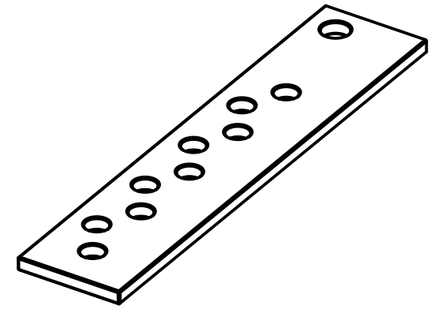

**TRIMETRIC VIEW (SCALE 1:1.25)**







## NOTES:

1. MATERIAL: C110 COPPER, TINNED. CUT FROM 1" x 1/8" (25.4 x 3.2) TINNED FLAT BAR (MECCANIXITY B0CGJC2S1L); ONE 305 BAR MAKES BUS1 + BUS2.
2. HOLES ARE PEM MOUNTING HOLES, NEVER TAPPED (R129): ø5.41 +0.08/-0 FOR PEM S-M4-2ZI AT EACH M4 STUD, ø6.35 +0.08/-0 FOR PEM SS-M5-2ZI AT THE M5 FEED. PRESS NUTS IN FROM THE STRIP FACE.
3. 0.3 x 45° EDGE BREAK IS MODELLED (THE ø6.01 / ø6.95 RIMS) - R138 / R76.
4. MOUNTS ON EDGE IN THE LOGIC BASE. DEBURR ALL HOLES AND EDGES.
5. MARKUP 2026-10-17: SPARE STUD POSITIONS DELETED; STUDS ON A 9.35 PITCH (BUS1 10, BUS2 9).

**UNLESS OTHERWISE SPECIFIED:**
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
X ±0.5 X.X ±0.2
X.XX ±0.05 ANGLES ±0.5°
BREAK SHARP EDGES 0.2-0.4
SURFACE FINISH Ra 3.2 µm
INTERPRET PER ASME Y14.5-2018

COMPANY / PROJECT
**ST185 CELICA GT-FOUR - LINK ECU CONVERSION**

TITLE
# LOGIC BUS STRIP BUS2

| PART / DWG NO. | REV | MATERIAL |
|---|---|---|
| ST185-FB-116 | E | C110 COPPER, TINNED |

| SCALE | UNITS | SIZE | SHEET | DATE | DRAWN |
|---|---|---|---|---|---|
| 1:1.5 | mm | B (11x17) | 1 OF 1 | 2026-10-18 | SteveCAD |

SOURCE
C:\\projects\\active\\st185-link-ecu-config\\cad\\fusebox\\rev7\\Logic_Strip_Logic_CuC110_25p4x3p2_on_edge.step

3RD ANGLE