

TOP VIEW - BODY (lid removed) scale 1.2:1

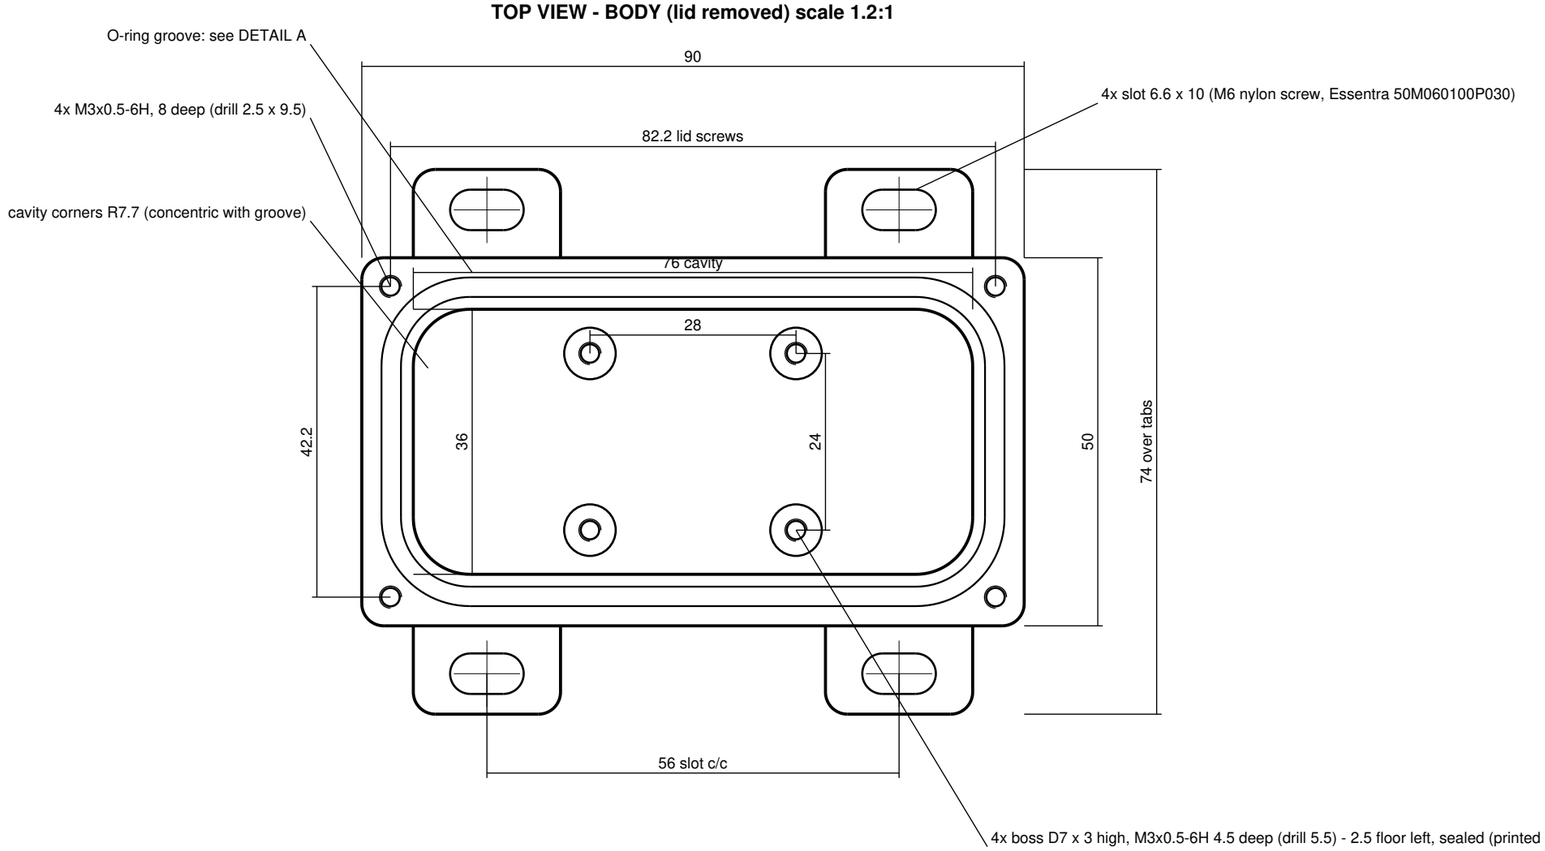


SIDE VIEW (from -Y), lid fitted scale 1.2:1

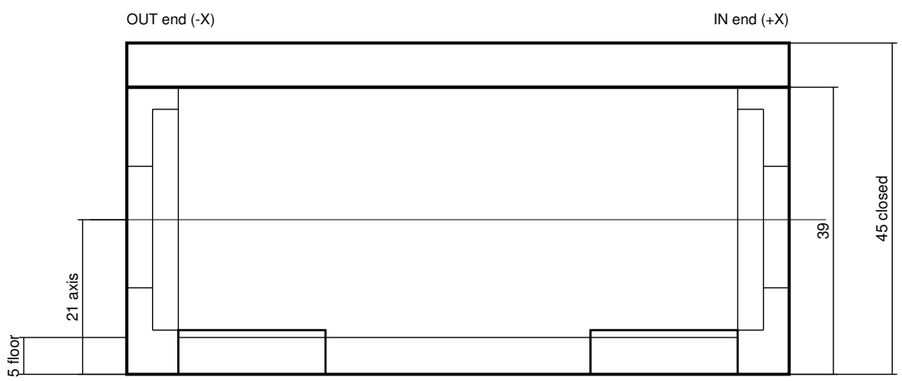


Tabs 6 thick (hidden). Cavity depth 34. Lid 6.

END VIEW +X (IN) scale 1.2:1

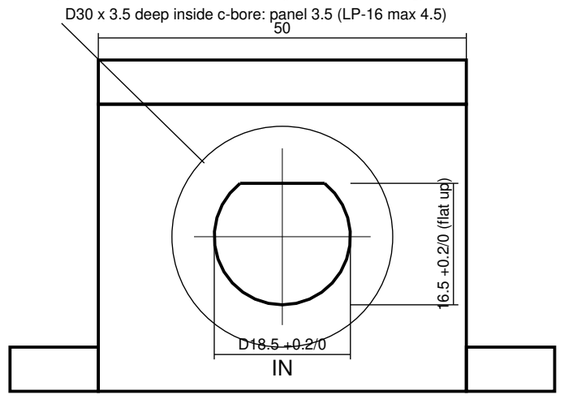

engrave IN / OUT 3.5 high, 0.3 deep, below the connector

DETAIL A - O-ring groove (body rim) scale 6:1




Parker ORD 5700 Design Chart 4-3, W 1.78 face seal, liquids

groove R 0.13-0.38, break edges 0.13, Ra 0.8 (32 rms) groove + lid face

squeeze 26 % nominal, fill 71 %; AS568-039 stretched ~2.4 % on centreline

LID 90 x 50 x 6 scale 1:1

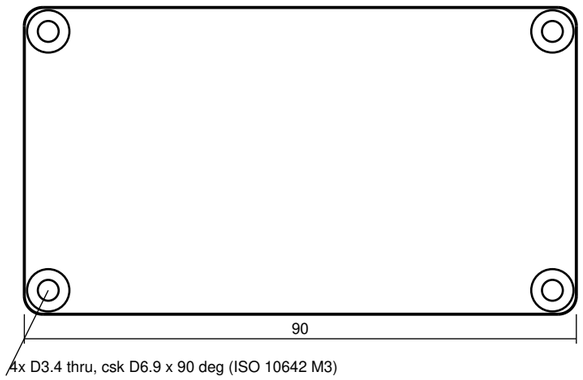

NOTES - VRC box (x2 identical: front FL/FR, rear RL/RR)

1. 6061-T6 billet body + lid. Stock est.: body 95 x 80 x 42, lid 95 x 55 x 8 (plate).
2. Seal: AS568-039 O-ring (ID 69.57, W 1.78; Parker Table 9-1) in body-rim face groove. NBR 70, Parker N0674-70 2-039 (Dan E4). Lid closes metal-to-metal on the rim.
3. Lid: 4x M3 x 12 ISO 10642 A2 countersunk; tapped holes outside the O-ring.
4. Connectors: 2x CNLINKO LP-16-C05SX-02-101, D18.5/16.5 flat, M18x1.5 rear nut, 1.0 N.m, panel 3.5 (max 4.5) - CNLINKO drawing LP-16-xxxSX-02-1xxx rev A1. Behind panel 12.6 (derived: A 26.2 - front 13.6). Rear nut OD not published: D30 counterbore (inside face, as modelled) is a safe allowance - check a sample nut.
5. Electronics: OpenLogicEFI Dual VR Conditioner (DetonationEMS, Dan E2) held by a 3D-printed holder on the box floor, no carrier board (Dan E1); holder fixed with 4x M3 nylon screws (Wurth 97790603111). PCB isolated from case (R31/R33).
6. Holder and board outline: TBD, model shown is the old placeholder (OPEN-ITEMS row 97).
7. Mount on 4x M6 nylon screws (SHIELD-RULES: box mounts on nylon) - Dan E5.
8. Break all edges 0.2. No coating on rim / groove / lid seal face.
9. Inside D30 counterbores stay as modelled (Dan, 2026-10-14). 3D printed: as modelled. Machined: back-counterbore tool through the D-hole, or a second setup on that wall.

ST185 VRC ENCLOSURE

Body + lid, O-ring face seal, LP-16 IN / OUT on opposite ends

Units mm | 3rd-angle | scales as noted | 6061-T6 | General tol. ISO 2768-m unless noted

Claude Code 2026-10-13 | Fusion docs ST185-*-Enclosure (unsaved to cloud; .f3d exported) | DRAFT for Dan review