

PANEL LIGHTS



Applications :-

- Airport Lounges
- Corporate Office
- Bank & ATM Outlets
- IT Centers
- Modern Work Spaces
- Hospital Premises

Features & Benefits

- Delivers excellent illumination & comfort in high ceiling areas
- Long life & photo biologically safe LEDs
- High performance Electronic Driver ensures zero maintenance
- No harmful UV & IR radiations
- Environment-friendly as it does not contain Mercury
- Instant light with low running temperature / Visual comfort with maximum energy saving
- Attractive high quality housing & optics

Housing & Finish

Aluminium powder coated white after phosphochromate treatment.

Mounting

- Very low mounting depth.
- Diffuser upto 85 transmission level for better efficiency and higher lumen output.



Electronic Driver

Independent Isolated, SELV output with Short-Circuit protection, Surge Protection & Other Safety test as per IS.

Specification

- High efficiency diffuser for glare free, uniform light distribution.
- High lumen output, Integrated with SMD 2835 LEDs (LM80 Certified).
- Ideal for depth space constraint false ceiling.


Panels Light

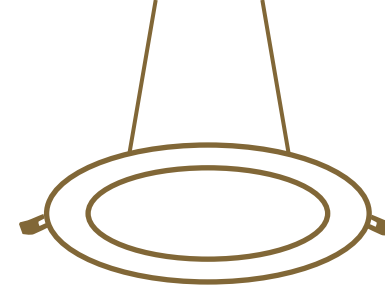

Slim Panel


Ordering Code	System Power	Lumen (lm)	Dimension (mm) {Cutout x (Size)}
JVSDLPL 3 SQ/R(E)	3W	270	70 x 85
JVSDLPL 6 SQ	6W	540	105 x 120
JVSDLPL 9 SQ	9W	810	125 x 145
JVSDLPL 12 SQ	12W	1080	150 x 170
JVSDLPL 15 SQ	15W	1380	185 x 200
JVSDLPL 18 SQ	18W	1620	205 x 225
JVSDLPL 24 SQ	24W	2160	280 x 300

Height: 23mm



Surface Mounted Panels

Ordering Code	System Power	Lumen (lm)	Dimension (mm) {Dia x (H)}
JVSDLPL 6 SQSM/RSM	6W	540	115 x 35
JVSDLPL 12 SQSM/RSM	12W	1080	170 x 35
JVSDLPL 18 SQSM/RSM	18W	1620	225 x 35



Ultra Slim Panels

Ordering Code	System Power	Lumen (lm)	Dimension (mm) {Cutout x (H)}
JVSDLPR 09 SQ/R	09W	810	70 x 13
JVSDLPR 18 SQ/R	18W	1620	120 x 13
JVSDLPR 24 SQ/R	24W	2160	145 x 13
JVSDLPR 30 SQ/R	30W	2700	195 x 13



Ultra Slim Surface Mounted

Ordering Code	System Power	Lumen (lm)	Dimension (mm) {Cutout x (H)}
JVSDLPR 09 SQSM/RSM	09W	810	70 x 30
JVSDLPR 18 SQSM/RSM	18W	1620	145 x 30
JVSDLPR 24 SQSM/RSM	24W	2160	170 x 30
JVSDLPR 30 SQSM/RSM	30W	2700	225 x 30

Sleek Panel With Integrated Edge lit Technology Installed With High Efficient Low Glare Sheet For Optimum Light Distribution Having Die Casted Aluminum Housing Complete With Industrial Grade Constant Current Constant Voltage LED Driver

★ Also available in Round

JUVAS




• Voltage = 110-270VAC - 50HZ • PF:>0.9 • CRI:>80 • Colour temperature = 6000K/4000K/3000K

Panels Light



LED Down lighter - Exclusive Series

Ordering Code	System Power	Lumen (lm)	Dimension (mm) {Size x (H)}
JVSDLW3 RSM	3W	270	85X60
JVSDLW7 RSM	7W	630	120X80
JVSDLW12 RSM	12W	1080	170X100
JVSDLW18 RSM	18W	1620	215X120




Commercial Light (Back Lit)

Ordering Code	System Power	Lumen (lm)	Dimension (mm) (Cutout)
JVSCL-36W (2'X2')	36W	3240	595X595
JVSCL-42W (2'X2')	42W	3780	595X595

Commercial Light (Edge Lit)

Ordering Code	System Power	Lumen (lm)	Dimension (mm) (Cutout)
JVSCL-24W (1'X1')	24W	2640	280X280
JVSCL-40W (2'X2')	40W	3600	575X575
JVSLD-48W (2'X2")	48W	4320	575X575

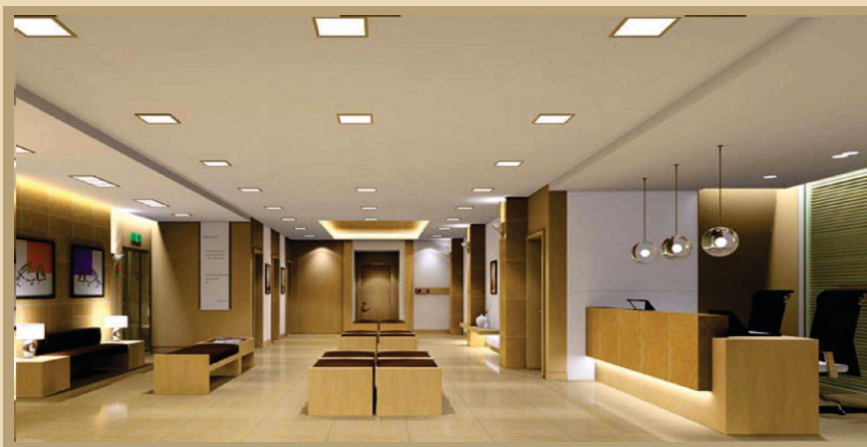

Sleek panel with integrated edge lit technology installed with high efficient low glare sheet for optimum light distribution having aluminum extrusion housing complete with Industrial Grade Constant Current Constant Voltage Led Driver.

JUVAS



• Voltage = 110-270VAC - 50HZ • PF:>0.9 • CRI:>80 • Colour temperature = 6000K/4000K/3000K