



"Where India's Active LED Revolution
Began & Continues To Lead"

About NVS

We are the top-tier provider of LED Display products and solutions, catering to various industries across India, including Marriage events, Corporate event & Education, Retail, DOOH & Digital Signage, Leisure & Hospitality, Sports and Entertainment. Their LED displays are built with the latest technology and offer superior image quality and product durability, providing businesses with the power to elevate their brand and reach new heights.

NVS is committed to delivering outstanding customer service, with their experienced experts providing support from the design stage to maintenance and training. They also offer technical online support and professional training in product maintenance, keeping their customers up-to-date with the latest technology and marketing trends.

Furthermore, **NVS** places a strong emphasis on after-sales service, providing reliable warranty and service policies that customers can trust. With **NVS's LED Display** products and solutions, businesses can confidently enhance their visual communication and engage their audiences like never before.



Where India's Active LED Revolution
Began & Continues to Lead



Our Milestones



15+

Years Experience



100+

Team Members



2000+

Completed Projects



24/7

Customer Support



Our Production facility



12500 Sq. Ft.
Monthly Production

P0.9 - P10
Pixel Pitch

50+ Engineers
Repair Facility

NVS LED Manufacturing Flow

Concept & Design

- Requirement analysis
- Pixel pitch, brightness, IP rating
- LED module size & resolution
- CAD design of panels + mounting

LED Selection & Binning Process

- LED brightness/color testing
- Binning for uniform colors

Module Assembly Stage

- Mask/Frame assembly
- Magnetic/bolt installation
- Signal + Power connectors

Cabinet/Panel Assembly & Wiring

- CNC metal cabinet fabrication
- Modules installation
- Power & data routing to HUB

On-Site Installation & Support

- Mounting/Maintenance training
- Warranty + After-sales service

Electronic Engineering

- LED driver IC selection
- PCB schematic & layout
- Power distribution design

PCB Fabrication & SMT Assembly

- Automatic SMT component placement
- LED mounting on PCB
- Reflow soldering

Quality Testing Phase

- Color calibration
- Brightness correction
- Aging test (48-72 hours)
- Dead pixel & uniformity test

Final System Integration

- Controller configuration
- Receiving cards setup
- Remote monitoring options



Our Certificates



Market Segment



Our Offered Products (GOB, COB & SMD)

Indoor

LUXE

0.93, 1.25, 1.56

AURA

1.2, 1.5, 1.8, 2, 2.5, 3.076, 4

LUXE Pro

0.7, 0.9, 1.2

VIVID

108, 135, 165

LUXE Lite

1.25, 1.53, 1.86

CRYSTAL

3.9-7.8

Outdoor

OPTIMA


2.5, 3.076, 4, 5, 5.926, 8, 10

CRYSTAL OD

3.9-7.8

BRITE

4.44, 6.67, 8, 10

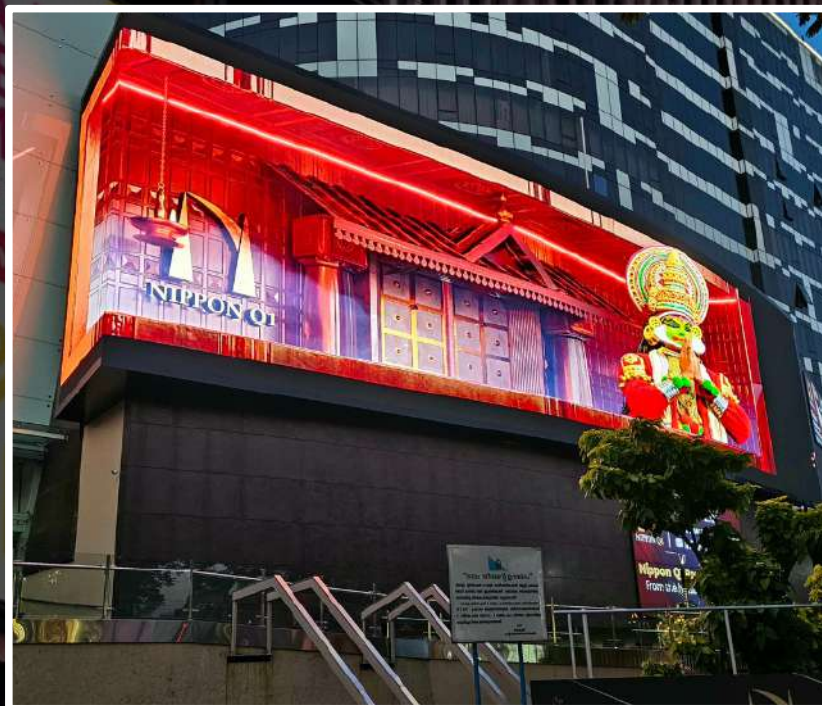

LUXE


Best in Class COB Flip Chip

Ultimate Pure Viewing Experience

Ultra Light & Thin

Green Energy Saving

Parameter	P0.9	P1.25	P1.5	P1.8
LED Type	Fully flip chip COB			
Pixel Pitch (mm)	0.9	1.25	1.5	1.8
Pixels Per panel	640x360	480*270	384*216	320*360
Pixel density(pixels/m²)	11,37,777	6,40,000	4,09,600	2,84,444
Panel Size (WxHxD)/(mm)	600x337.5x39.75	600x337.5x39.75	600x337.5x39.75	600x675x39.75
Module Size (WxH)/(mm)	150x168.75			
Panel Material	Die Casting Aluminum			
Panel weight (kg/panel)	4			7.9
Processing Depth(Bit)	13			
Maintenance	Full Front			
Refresh Rate(Hz)	3840 Hz			
Driving Type	1/54	1/60	1/54	
Signal Transmission Distance(m)	CAT6 cable:<100 m;Single mode fiber:<10 km			
Brightness(cd/m²	600			
Viewing Angle(°)	0~160			
Contrast ratio	10000:1			
AC Input Voltage(V)	AC: 100V~240V (50~60Hz			
AC Input Power Max	75W/panel; 375W/m²	70W/Panel; 350W/m²		130W/Panel; 320W/m²
AC Input Power Ave	35W/panel; 175W/m²	30W/panel; 150W/m²	25W/Panel; 125W/m²	48W/Panel; 120W/m²
Storage Temperature(°C)	-20~60			
Operating Temperature (°C)	-10~40			
IP rating (front)	IP65			
Storage Humidity (RH)	10%~90% non-condensing			
Operating Humidity (RH)	10%~80% non-condensing			
LED Life Time(hrs)	100000			
Panel installation	fix			
Certifications	CCC/CE/CB/ETL/FCC/RoHS			

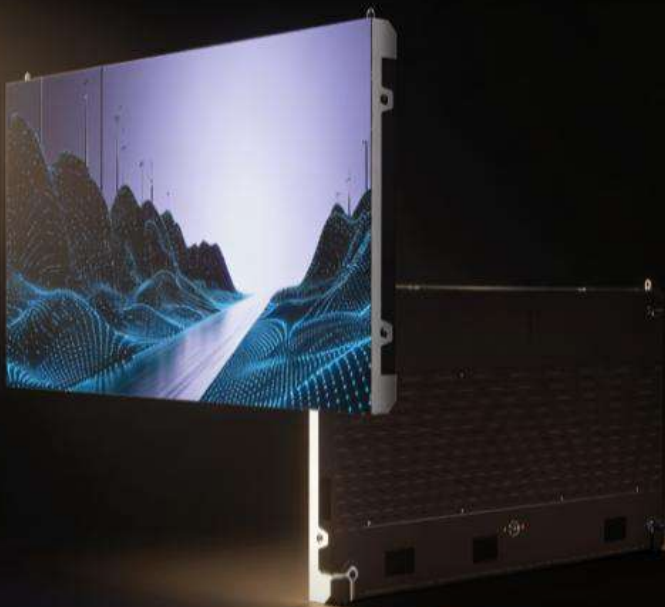

LUXE Pro

Best in Class COB Flip Chip

Flip-Chip COB with Common Cathode

Support Power & Signal Backup

High brightness up to 2000 nits

Prodcut	i0.7	i0.9	i1.2	i1.2 Pro
LED type	Flip-Chip COB	Flip-Chip COB	Flip-Chip COB	Flip-Chip COB
Pixel Pitch(mm)	0.7	0.9	1.25	1.25
Panel Material	Die-casting Aluminum			
Panel Size(mm)	600 x337.5 x 35			
Panel Resolution	768 ×432	640x360	480x270	480x270
FHD/2K layout	3x3		4x4	
4K layout	5x5	6x6	8x8	8x8
Panel Weight (kg)	4.6			
Module Size （mm ）	150 ×168.75			
Module Layout （W×H）	4×2			
Module Resolution(pixels)	192 ×216	160X180	120X135	120X135
Brightness （nit ）	600-2000			
Refresh Rate （Hz ）	3840		7680	
Contrast	20000:1			
Max power consumption (W/ m ²)	190	165	160	160
Avg power consumption (W/ m ²)	65	55	50	50
Drive type	Common Cathode			
Scan rate	36s	36s	27S	15S
Gray level	16bit			
IP rate	IP65/IP30			
Input power	100~240V			
Installation type	Mounting/stacking/hanging			
Maintenance	Feont			
Certification	CCC/CE/CB/ETL/FCC/RoHS			




LUXE Lite

Best in Class COB Flip Chip

Minimalist Design
Superior Performance
Excellent Vision
Green Energy Saving

Parameter	P1.25	P1.53	P1.86
LED Type	Fully flip chip COB		
Pixel Pitch	1.25mm	1.53mm	1.86mm
Module Resolution	256×128	208×104	172×86
Module Size (mm)	320×160×14.3	320×160	320×160×14.5
Module Weight	0.5kg	0.5kg	0.5kg
Brightness (nit)	600	600	600
Viewing Angle (H/V)	160°/160°	160°/160°	160°/160°
Contrast Ratio	10000:1	10000:1	10000:1
Max Power (W/m ²)	285	285	285
Avg Power (W/m ²)	150	130	125
Refresh Rate	3840Hz	3840Hz	3840Hz
Gray Level	12–14bit	13bit	13bit
LED Lifetime (hrs)	100,000	100,000	100,000
Working Temp	-10°C–45°C	-10°C–45°C	-20°C–55°C
Protection	Front: IP54	Front: IP54	Front: IP54



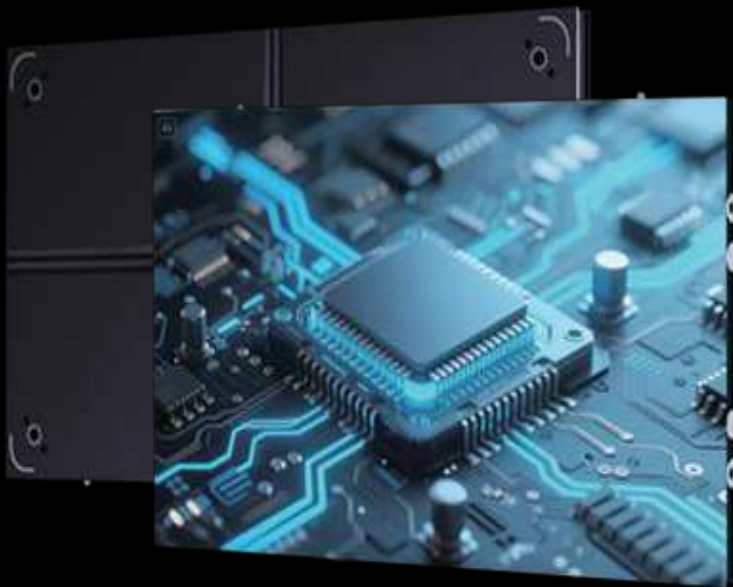

AURA

Indoor SMD LED Display

Thickness 2.9mm, Ultra thin Design
Supports Power & Data Redundancy
Wall Mounting Installation

Content	P2.42	P1.77	P1.48
LED Configuration	SMD2020 Copper Bracket	SMD1515 Copper Bracket	SMD1212 Copper Bracket
Lamp Brand	GKGD / Kinglight	GKGD / Kinglight	GKGD / Kinglight
IC	ICN1065L	ICN1065L	ICN1065L
Control Card	Novastar MRV412	Novastar MRV412	Novastar MRV416
Pixel Pitch (mm)	2.42mm	1.702mm	1.403mm
Module Resolution(dots)	132x66	180x90	216x108
Panel Resolution(dots)	264x198	360x270	432x324
Pixel Density (dots /m ²)	170156	316406	455625
LED Module Size (L xW xH) /(mm)	320x160mm	320x160mm	320x160mm
Panel Size (L xW xH) /(mm)	640x480mm	640x480mm	640x480mm
Panel Material	Die-cast Aluminum Cabinet	Die-cast Aluminum Cabinet	Die-cast Aluminum Cabinet
Module Current	About 4.5A	About 4.5A	About 4.5A
Refresh Rate (Hz)	≥3840	≥3840	≥3840
Driving Model (Scan)	1/ 33 Scan	1/ 45 Scan	1/ 54 Scan
Brightness with GKGD Lamp	Around 800 cd/m ²	Around 600 cd/m ²	Around 600 cd/m ²
Brightness with Kinglight Lamp	Over 800 cd/m ²	Around 650 cd/m ²	Around 650 cd/m ²
Operation Temperature (°C)	-20°C~70°C	-20°C~70°C	-20°C~70°C
Lifetime (hrs)	100000	100000	100000
Installation Methods	Fixed Installation	Fixed Installation	Fixed Installation
Panel Maintenance Methods	Front Maintenance	Front Maintenance	Front Maintenance



VIVID

Flip Chip COB All in One Display

Simply Operation with Remote Control
Smart Screen Casting with Reverse Mirroring
Eye Saving with Eye Protection

Model	108 inch	135 inch	162inch	216inch
Size(mm)	2410 *1500 *35	3010 *1840 *35	3610 *2175 *35	4810 *2850 *35
Resolutions	1920 *1080		3840 *2160	
Interfaces	HDMI *2(in)、HDMI **1(out)、USB*3、LAN*1WIFI. Infrared. BluetoothBuilt-in Speakers 15W *2			
Screen	2K Micro LED Direct View	2K Micro LED Direct View	4K Micro LED Direct View	4K Micro LED Direct View
Specifications	10-Point Infrared Touch Display Screen 800 Nits: Brightness 20000:1 Contrast Ratio 16-bit Gray Scale 3840Hz Refresh Rate 100% DCI-P3 Color Gamut 0.5ms Dynamic Response Time 170°(H)/170 °(V)Viewing Angle IP65 Front Protection Rating			
System Platform	Android Cortex A73+A53 (Quad-Core CPU) + 4GB DDR + 256GB Solid State Drive			
Accessories	HDMI cable *1. Wireless Screen Mirroring Adapter *1			
Optional Components	Mobile Stand. Base. Omnidirectional Microphone . Camera			
installation Method	Mounting, Mobile Stand, Base			
Certification	CCC/HDR3.0/CB/CE/FCC/ETL/Color Quality/Energy Efficiency Certification			



CRYSTAL

With High Transparency

Upto 80% Transparency

Ingress Protection up to Ip65

Curve Range: -15°~+15° (2.5°/Unit)

CRYSTAL

CRYSTAL	
Pixel Pitch (mm)	3.9-7.8
Cabinet Size(WxH)(mm□)	W500mm×H500mm×D80mm
Cabinet Build	W1000mm×H500mm×D80mm
Brightness	Die Cast-Aluminium
Transparency	2000/4000 nits
Max power (W/m ²)	Upto 80%
Refresh Rate	300
	3840Hz



OPTIMA

Outdoor LED

Light Weight Die-Cast Cabinet

IP65 Front with IP54 Back

Brightness 5500 Nits

OPTIMA

Pixel Pitch (mm)	2.5, 3.076, 4, 5, 5.926, 8, 10
Cabinet Size(WxH)(mm)	960 X960
Cabinet Build	DieCast-Aluminium
Brightness	"2.5, 3.076, 4, 5, 5.926 mm: 5,000 nit 8 mm: 4,500 nit 10 mm: 5,500 nit"
Contrast	3000:01:00
Power	200 to 488 W/m ²
Refresh Rate	3840 Hz



BRITE

High-Brightness Outdoor LED



Energy Saving Design

Light Weight Cabinets, IP66 Front & Back
Support for 3D display with Brightness up to
8000 Nits

BRITE	
Pixel Pitch (mm)	4.44, 6.67, 8, 10
Cabinet Size(WxH)(mm)	960 X960
Cabinet Build	DieCast-Aluminium
Brightness	"4.44 mm: 5,500–6,500 6.67, 8, 10 mm: 6,000–10,000 (Depending on model)"
Contrast	40,000 : 1
Power	"Max: 520 W/m ² Avg: 200 W/m ² "
Refresh Rate	7680 Hz



Why Choose **NVS VIDEO SYSTEMS**



**Manufacturing Active LED
in India for more than 10 Years**



**Annual Installation Capability
more than 3 Lac sq. ft.**



**All Certificates
(CE, FCC, UL/ETL)**




**24x7
Support**



**PAN India
Presence**



**Largest Service centre more
than 50+ Engineers**

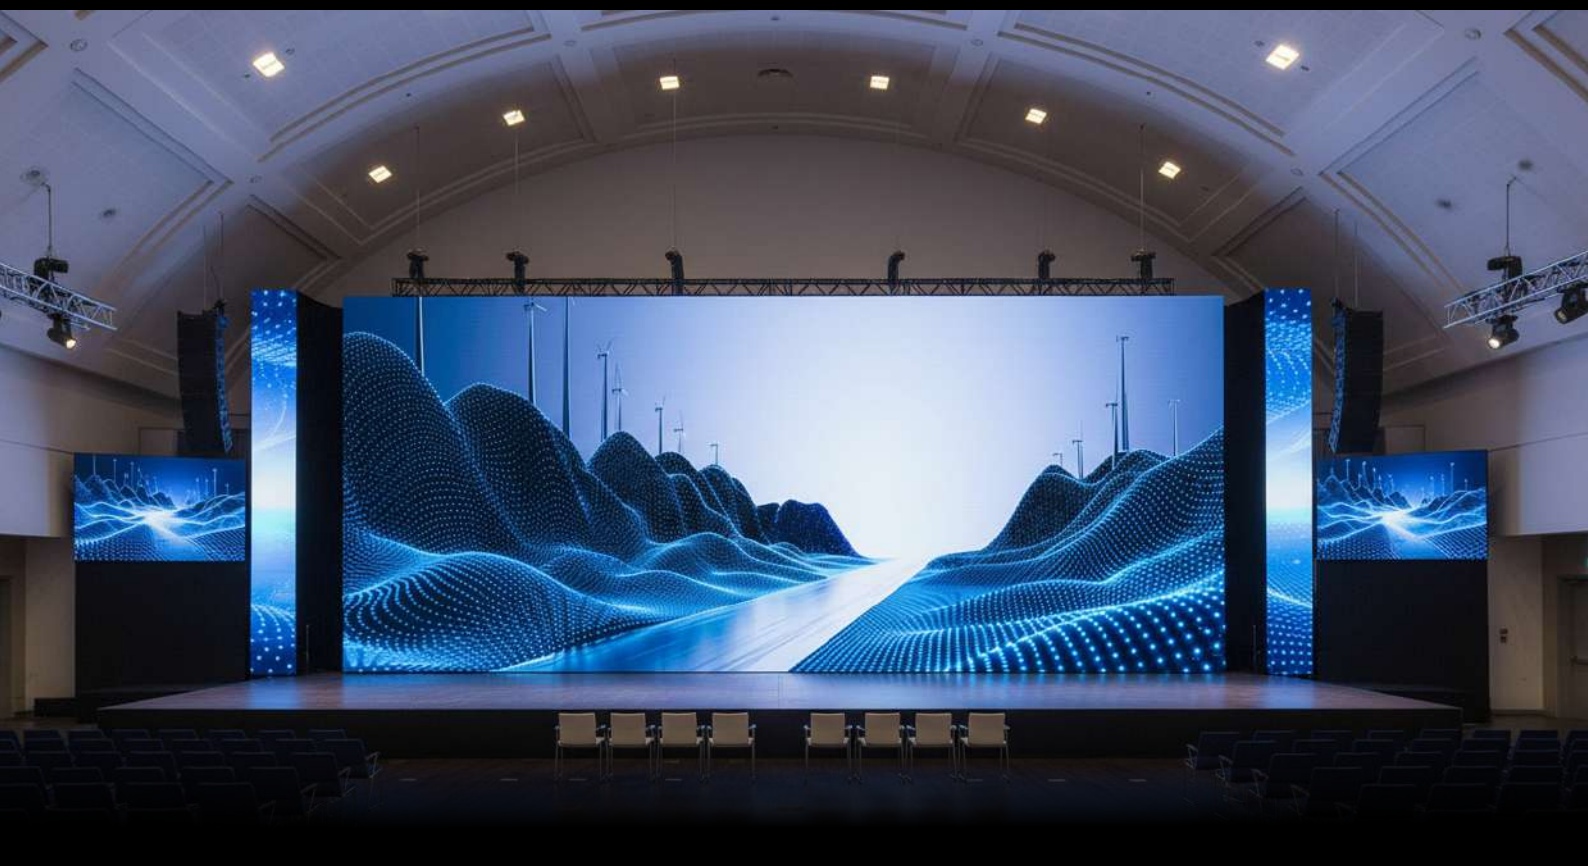

Our Clients



Our Feedback

★★★★★



Gagan Anand

"Very responsive staff I like the way they convince all products are displayed on the wall with led lightning.. this place is bit expensive but they give best quality to you.. i personally advice this place for videography."

★★★★★



Akshit Lalwala

"Very responsive staff with large variety of products"

ISO9001:2015

ISO14001:2015

ISO45001:2018

ISO27001:2022

ISO50001:2018



Newtech

Video Systems Pvt. Ltd.



Contact Detail: +91 1204641607



Website: www.nvsledwall.com

■ Noida Office: 1002, Tower B, ATS Bouquet, Sector 132, Noida 201304

■ Head Office: M5/A, DSIDC, Badli Industrial Area, Phase-1, Delhi-110042 Contact Details: +91-9810103197, +91-9810103697

■ Mumbai Branch Office: Unit no. 85, Building no. 85, Akshay Mitta Industrial Estate, Marol, Andheri East, Mumbai 400059. Mob: 9212622643, 8789178077

■ Telangana Branch Office: Plot No.1-367/A/2/A/1, Near Ambedkar Statue, Jalpally, Hyderabad, District: Rangareddy Telangana - 500005 Mob: 9213092038, 7419236651

■ U.A.E International Branch Office: Warehouse No. 10, Plot No. 597779, Dubai Investment Park 2, Dubai, Uae Mob: +9710529217755