

CANFDToolPro


Quick User Manual

Version: V1.02


Date: 2024.02.26

1.Device Management


The software "Device Management"->"Device Operation" can open the device management interface. Here you can open the device, start and stop the channel, set parameters and other related operations.

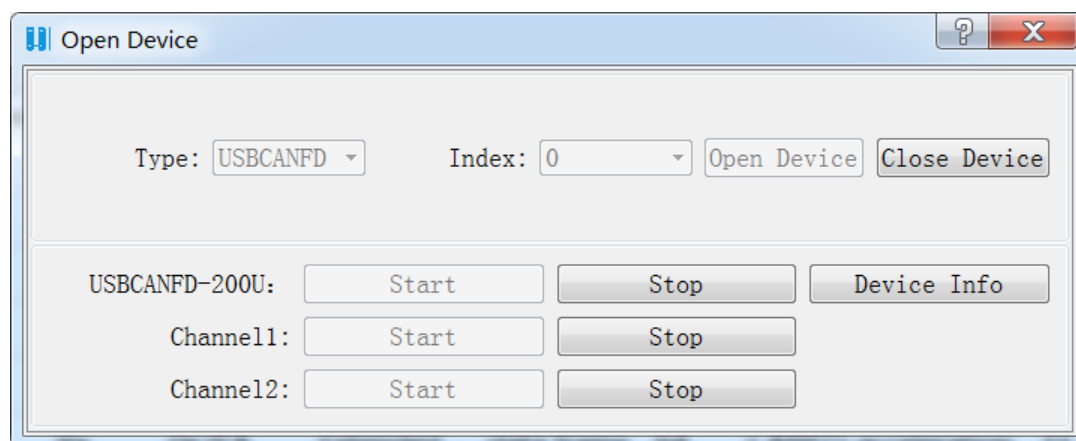


Click on "Device Information" to view the current device software and hardware version information.

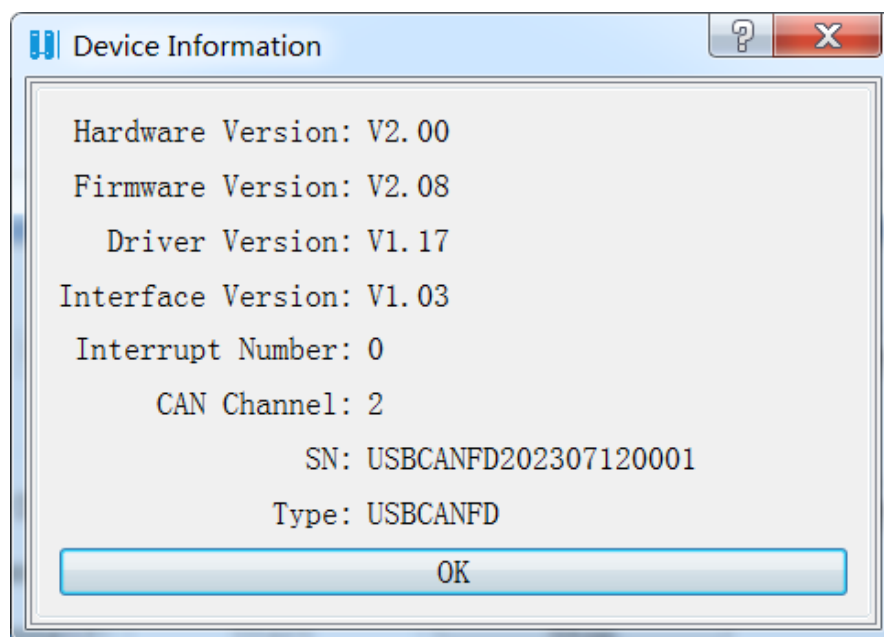

When the channel is started, the parameter setting interface is as follows, and baud, CANFD standard, filtering, etc. can be set.

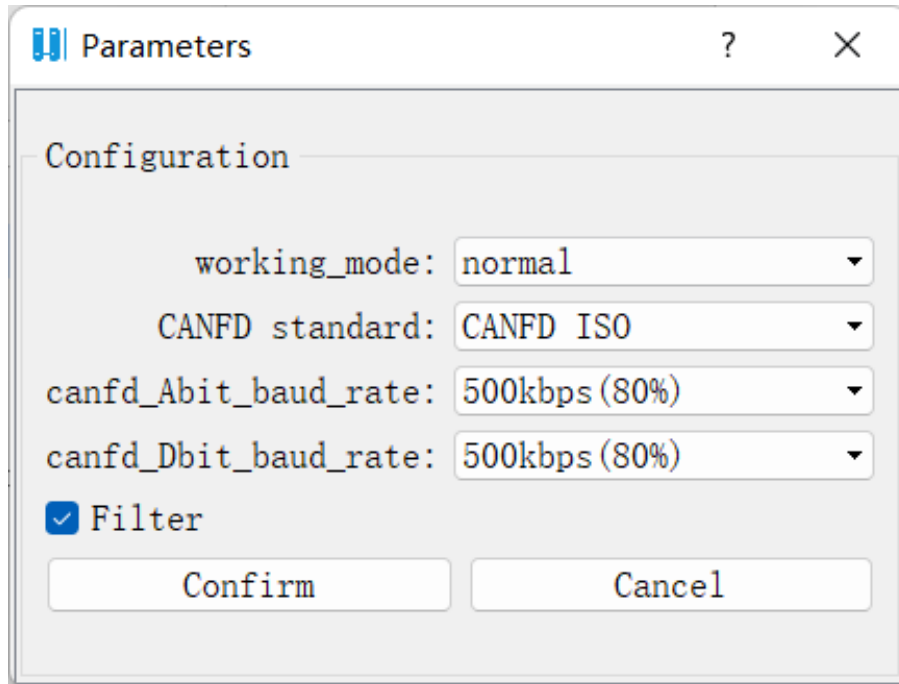


The filter settings are as follows: Note that a maximum of 64 filter sets can be set for standard frames and a maximum of 32 filter sets can be set for extended frames.

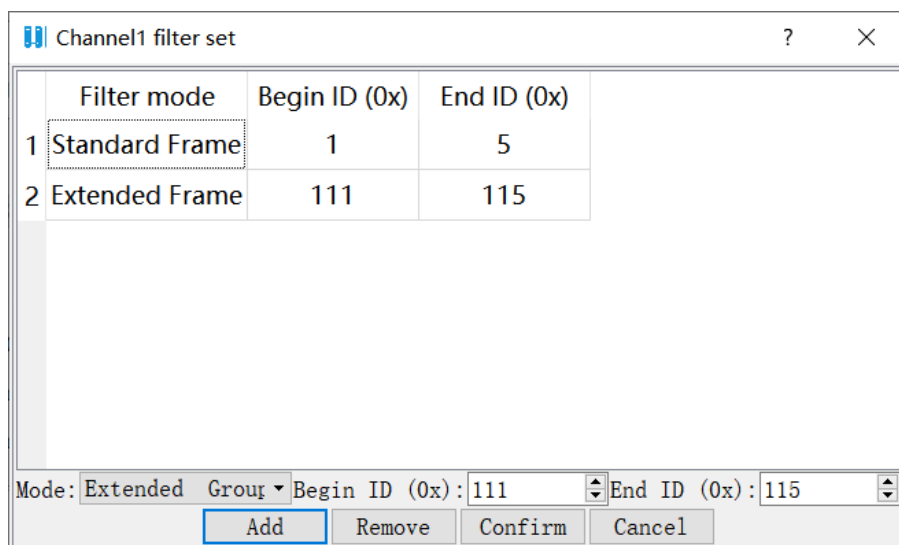


2.Display Frames

2.1 Real time saving

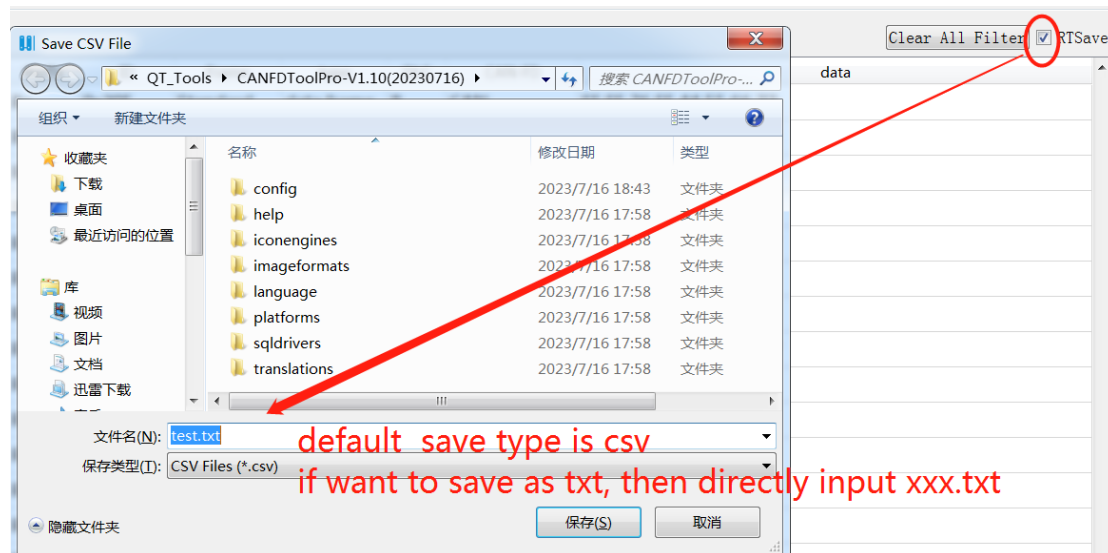


2.2 Pause Display

When receiving data, you can tick "Pause Display" to make it easier to view the data (the data is still being received but is not displayed on the current interface). Uncheck the box and continue viewing the data.

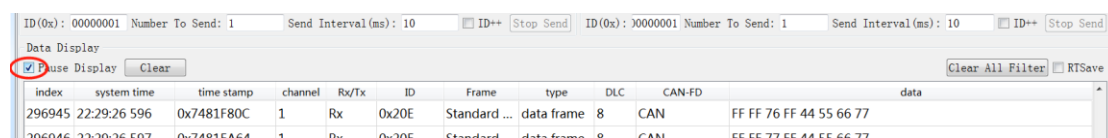


2.3 Statistics of Receiving and Sending

At the bottom of the software, the total number of channels received and transmitted, and the real-time frame rates of the received and transmitted channels have been counted. Press the 'Reset Count' button to reset to zero.




2.4 Display Cache

Display cache, indicating the maximum number of frames of data that can be displayed on the current interface, with a default value of 1000.

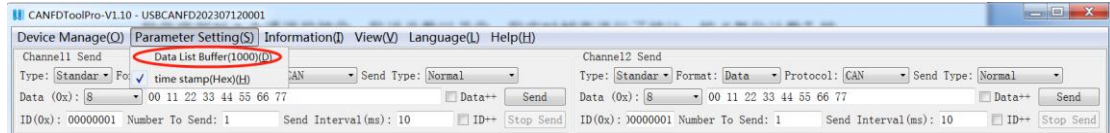


2.5 Data Viewing

If the data is too long (e.g. 64 bytes) and the interface cannot display a full frame of data, move the mouse to the following position. When it changes to a bi-directional icon, double-click to expand the entire data content. Drag the horizontal scroll bar at the bottom to view the data.

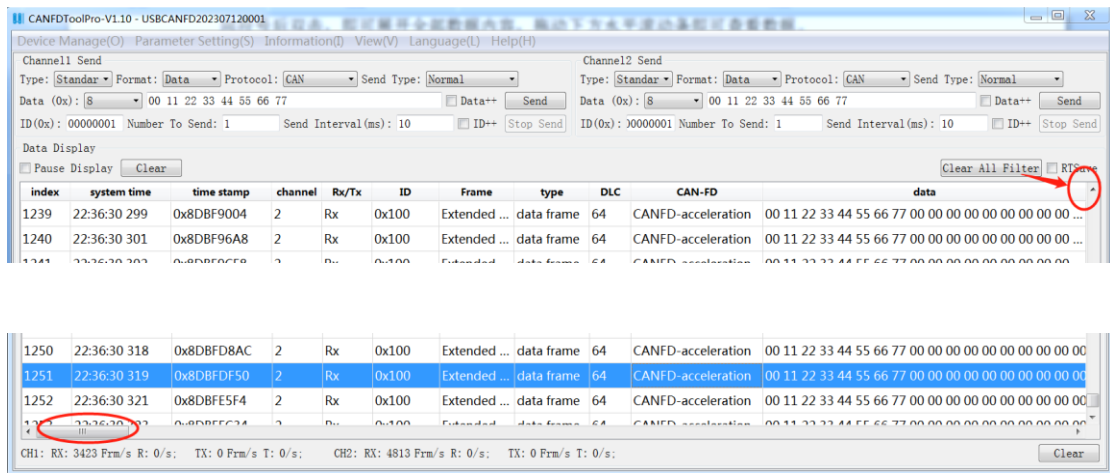


3. Filter Function


In the data display window, all displayed items can be filtered by criteria. When filtering, right click on the item to be filtered and a filter menu will pop up. Click 'Filter' to display all the content available for filtering for that item; click 'Show All' to remove the filter criteria for changing items.

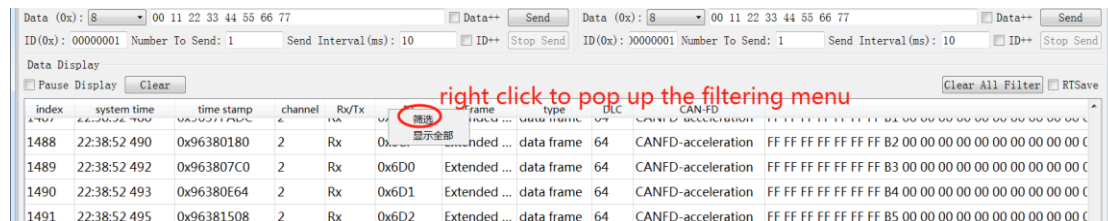


The filtering option will list all different values in the column, and one or more filtering criteria can be checked simultaneously.

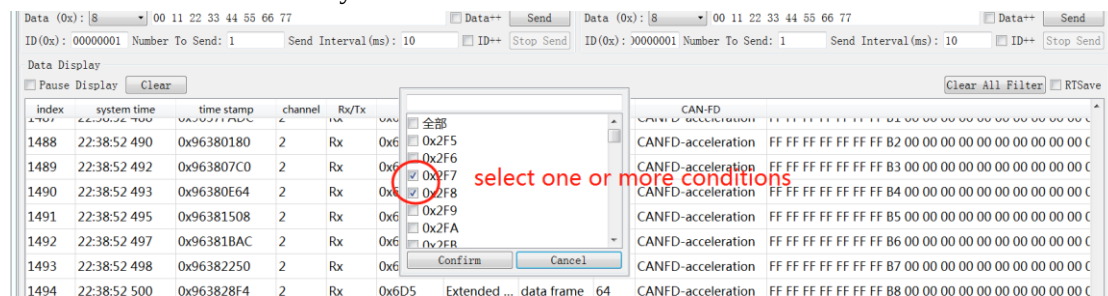

Items for which filter criteria have already been set are indicated by an asterisk (*). For example, if "ID" has filter criteria set, it will be displayed as "ID *".

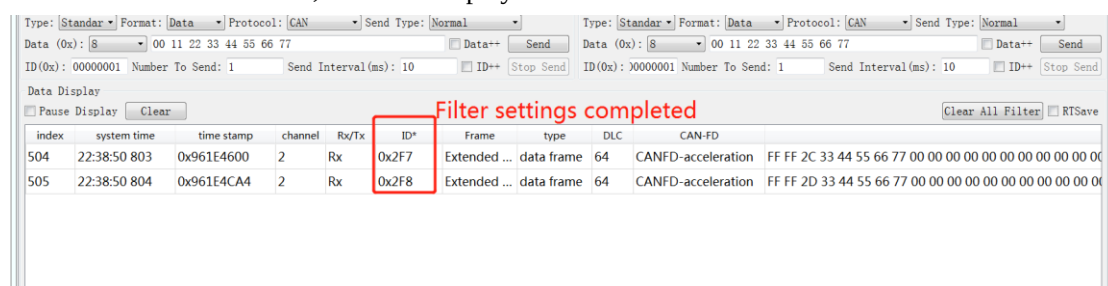

All filter criteria are 'and' related. For example, to view a data frame with a received frame ID of 0x2F7, 0x2F8 for channel 2, set the filter criteria as follows: channel -> select 2, receive/send -> select Rx, ID -> select 0x02F7, 0x2F8, type -> select data frame. As shown in the figure below.

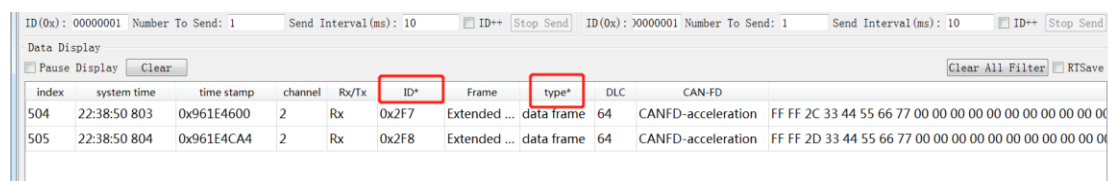

If you want to delete all the filter criteria you have set, click the 'Delete all filter criteria' button.